


## H-2Q26-TP-W

Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

### Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFM26W/GX24D	2	26	50/10	0.45	0.00	0.00	54	0.92	15	0.99
CFQ26W/G24D	2	26	50/10	0.44	0.00	0.00	52	0.90	15	0.99

### Wiring Diagram

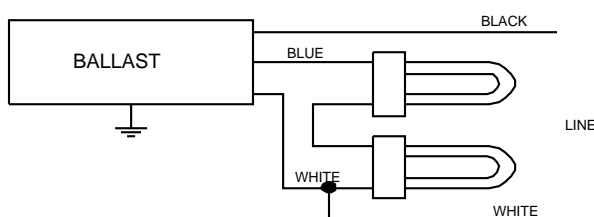


Diag. 50

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	15		Yellow/Blue		
White	15		Blue/White		
Blue	15		Brown		
Red			Orange		
Yellow			Orange/Black		
Gray			Black/White		
Violet			Red/White		

### Enclosure

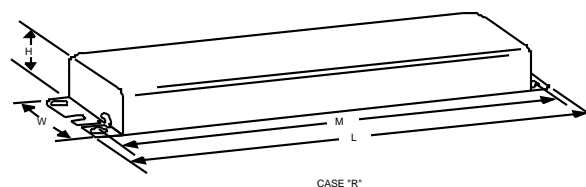

### Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
9.50 "	2.375 "	1.6875 "	8.90625 "
9 1/2	2 3/8	1 11/16	8 29/32
24.1 cm	6 cm / 0 cm	4.3 cm	22.6 cm

Revised 05/23/2000



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · [www.philips.com/advance](http://www.philips.com/advance)

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886