




Electrical Specifications

IZT-132-SC@120

Brand Name	MARK 7 0-10V
Ballast Type	Electronic Dimming
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60 HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts) (min/max)	Ballast Factor (min/max)	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
F17T8	1	17	50/10	0.16	06/19	0.05/0.94	10	0.99	1.6	4.95
F25T8	1	25	50/10	0.23	07/27	0.05/0.98	10	0.99	1.6	3.63
* F32T8	1	32	50/10	0.29	08/35	0.05/1.00	10	0.99	1.6	2.86

Wiring Diagram

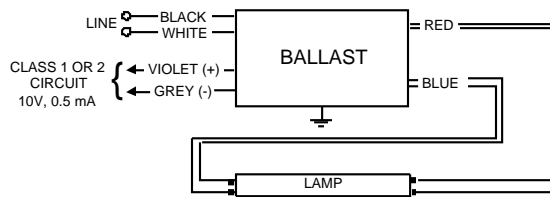


Diag. 55A

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	22	55.9	Yellow/Blue		0
White	22	55.9	Blue/White		0
Blue	46	116.8	Brown		0
Red	26	66	Orange		0
Yellow		0	Orange/Black		0
Gray	36	91.4	Black/White		0
Violet	36	91.4	Red/White		0

Enclosure

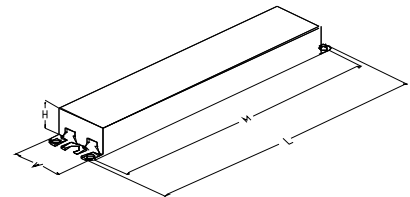

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
9.50 "	1.7 "	1.18 "	8.90 "
9 1/2	1 7/10	1 9/50	8 9/10
24.1 cm	4.3 cm	3 cm	22.6 cm

