


SPECIFICATION SHEET : NPY-120-132-CR

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
*** Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.




CF12T9-32W

ELECTRICAL DATA

INPUT VOLT: 120V \pm 10%, 50/60Hz									
LAMP WATTS/TYPE	FC12T9-32W	-	-	-	-	-	-	-	-
LAMPS OPERATED	1								
INPUT WATTS	31.28								
LINE CURRENT:	0.478								
POWER FACTOR	0.545								
BALLAST FACTOR	1.022								
EFFICACY FACTOR	3.286								
THD	146.00								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)								
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								


MECHANICAL DATA

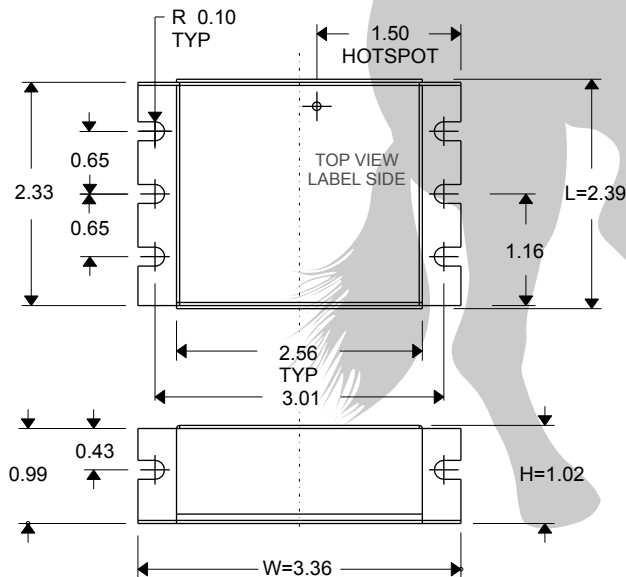

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	YELLOW/WHITE	YELLOW/WHITE
LENGTH - INCHES	18 \pm 1"	18 \pm 1"	6 \pm 1/2"	-----

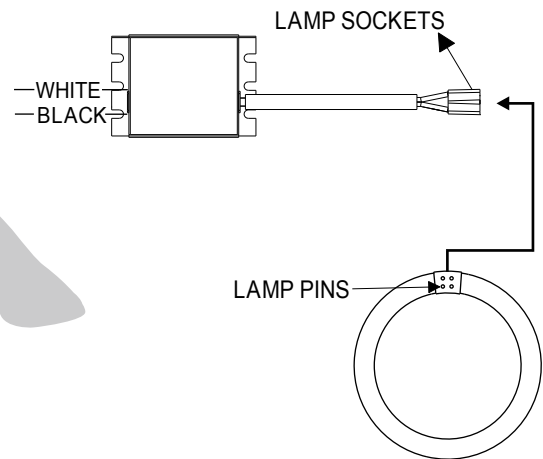

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 3 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-323-599-5000.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com

2006-13 rev B