





## E120RS/120

Ballast Type: Electronic Fluorescent  
 Starting Method: Rapid Start  
 Input Voltage: 120V  
 Input Frequency: 50/60Hz

### Electronic Fluorescent Ballast Specifications

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
<b>F20T12</b>	1	120	20	0/-18	0.27	18	0.90	<130	0.56	5.00	1-7
F20T8	1	120	20	0/-18	0.27	18	0.90	<130	0.56	5.00	1-7
F18T8 24"	1	120	18	0/-18	0.27	17.5	0.95	<140	0.55	5.43	1-7
F17T8	1	120	17	0/-18	0.29	18.5	1.00	<140	0.56	5.41	1-7
F15T12	1	120	15	0/-18	0.25	16	1.00	<140	0.54	6.25	1-7
F15T8	1	120	15	0/-18	0.25	16	1.00	<140	0.54	6.25	1-7
F14T12	1	120	14	0/-18	0.24	15.5	1.00	<150	0.54	6.45	1-7
F14T8	1	120	14	0/-18	0.24	15.5	1.00	<150	0.54	6.45	1-7
PL13S/E/2GX7	1	120	13	0/-18	0.26	15.5	1.00	<130	0.51	6.45	1-5


#### WIRING DIAGRAMS



#### STANDARD LEAD LENGTHS

	in.	cm.
Black	18	45.72
White	18	45.72
Blue	20	50.80
Red	16	40.54

#### CASE DIAGRAM

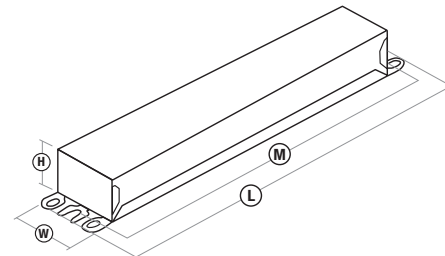

#### CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
6.46"	1.37"	1.00"	6.00"

OCV: <300V

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50108

