


**PHILIPS
ADVANCE**

**Metal
Halide
Lamp Ballast**

**Catalog Number 72C5581
For 175/150W M57/M107
60 Hz CWA
Status: Active**

DIMENSIONS AND DATA

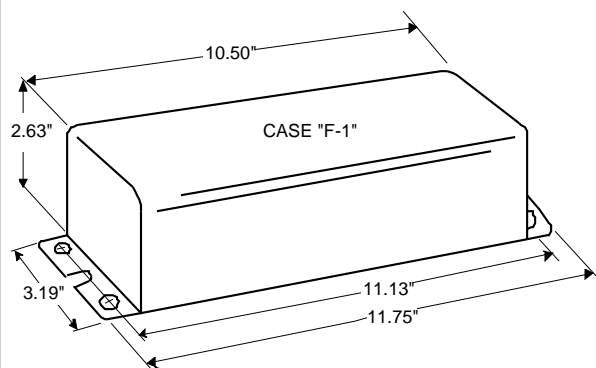


INPUT VOLTS	120	277			
CIRCUIT TYPE	CWA				
POWER FACTOR (min)	90%				
REGULATION					
Line Volts	±10%				
Lamp Watts	±10%				
LINE CURRENT (Amps)					
Operating.....	1.75	0.75			
Open Circuit.....	2.15	0.92			
Starting.....	0.85	0.36			
UL TEMPERATURE RATINGS	A (105°C)				
Insulation Class	1029				
Coil Temperature Code	-20°F or -30°C	A	A		
MIN. AMBIENT STARTING TEMP.	300				
NOM. OPEN CIRCUIT VOLTAGE					
INPUT VOLTAGE AT LAMP DROPOUT.....	60	138			
INPUT WATTS	205				
RECOMMENDED FUSE (Amps).....	5	3			
CORE and COIL					
Dimension (A)					
Dimension (B)	14				
Weight (lbs.)	12"				
Lead Lengths					
CAPACITOR REQUIREMENT					
Microfarads					
Volts (min.)					
Fault Current Withstand (amps)					
60 Hz TEST PROCEDURES (Refer to Philips Lighting Electronics N.A. TEST Procedure for HID Ballasts - Form					
High Potential Test (Volts)	1600				
1 minute	2000				
2 seconds	270-330				
Open Circuit Voltage Test (Volts)	1.55-1.90				
Short-Circuit Current Test (Amps)					
Secondary Current					
Input Current.....	0.56	0.24	-	-	-
	0.85	0.36			

Capacitor:

The capacitor is included as part of the potted assembly.

Ignitor: NA

This ballast does not require the use of an ignitor.

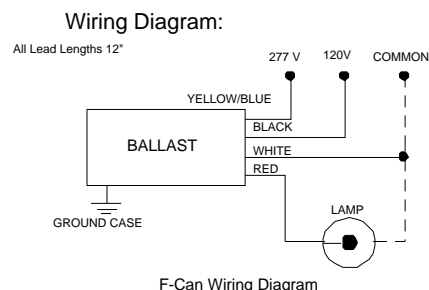

Typical Ordering Information

(please call Philips Lighting Electronics N.A. for suffix availability)

Order Suffix	Description

Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

Revised: 09/07/01