



ProLume™


ProFormance™ Electronic Fluorescent Ballast Specifications

E1CR22RS/120/PT

Ballast Type: Electronic Fluorescent
Starting Method: Rapid Start
Input Voltage: 120V
Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
FC8T9	1	120	22	0/-18	0.33	20	0.90	<150	0.52	4.50	1-4

WIRING DIAGRAM

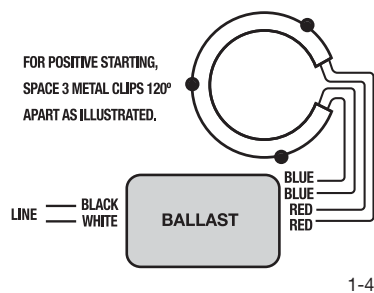


STANDARD LEAD LENGTHS

	in.	cm.
Black	12	30.48
White	12	30.48
* Blue	9	22.86
* Red	9	22.86

* Pigtailed

OCV: <300V

CASE DIAGRAM

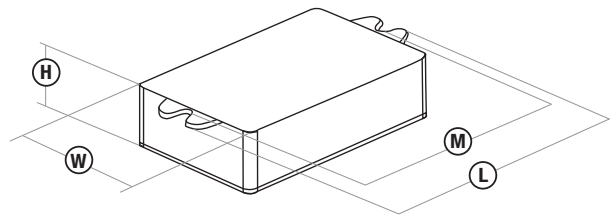

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
3.43"	1.82"	1.20"	3.15"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50150

