

CYLINDRIX TRACK

CYLT
CMHMR16



APPLICATION:

Accent and display lighting for Retail, Commercial and Hospitality environments

CONSTRUCTION:

Die-cast lamp and ballast housing
Formed aluminum yoke
Electronic ballast
GX10 TAL pulse rated socket
Integral single pole on/off switch
Powder coat paint

OPTICS:

0-90° tilt, 360° rotation
GE CMHMR16, GX10 base, 20w

MOUNTING:

Track, canopy and busway

LABELING:

UL and CUL listed


ACCESSORIES:

Snoot: Spun aluminum 1/2" length standard
Painted finish

Cross Blade: Stamped steel painted black
Cross blade sits in snoot which must be ordered when using cross blade

PROJECT :

TYPE :

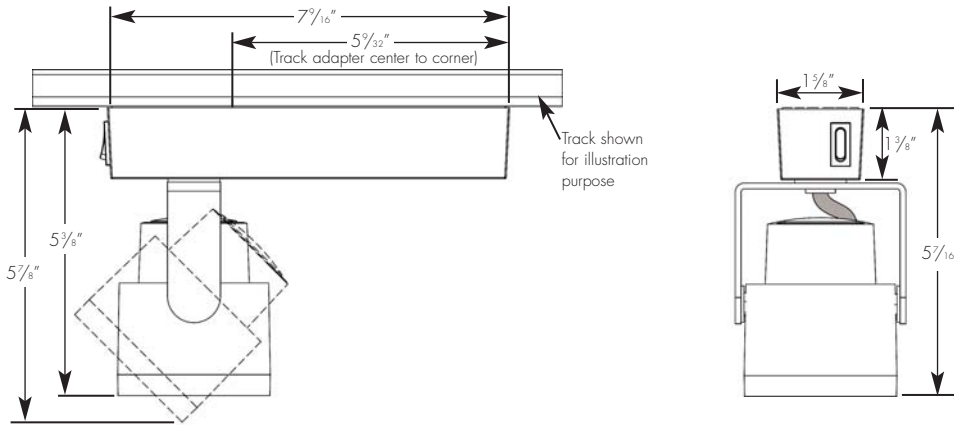

ELECTRICAL

		Lamping	
		20w	
Ballast		Input watts	Amps*
Electronic	120v	24	0.2

*Data is for open circuit current
CMHMR16, GX10 base, 20w

Amerlux reserves the right to change details that do not affect overall function and performance.

ECOTECTURAL
Architectural lighting for sustainable design.



ORDERING INFORMATION:

Model	Wattage	Lamp Type	Ballast	Finish	Mounting	Voltage	Options/ Accessories
CYLT	20	CMHMR16	E - electronic	WT - white texture BT - black texture ST - silver texture - [other RAL]	TS1 - 1 circuit, Halo compatible TL1 - 1 circuit, Lightalier compatible TJ1 - 1 circuit, Juno compatible	120	HEX - hexcell louver SN - snoot (1/2" length standard), specify color (WT, BT, ST) CB - cross blade, specify color (BT), black standard

Example: CYLT-20-CMHMR16-E-WT-TS1-120-SNWT

Cat #:

CYLINDRIX TRACK

CYLT CMHMR16






TYPE :

ecOTECTORAL
Architectural lighting for sustainable design.



FIXTURE DATA:



GE CMH PRECISE MR16



CMH20MR16/830/SP 12°
9,000 Rated Life - 9,000 CBCP

D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
4.0'	604	1.1	1.1	3.0'	144	2.3	1.3	3.0'	380	1.3	1.1	3.0'	688	0.8	0.7
8.0'	151	1.6	1.6	4.0'	80	3.1	1.6	4.0'	214	1.6	1.2	4.0'	394	1.1	0.9
12.0'	67	2.6	2.6	6.0'	36	4.6	2.4	6.0'	95	2.5	1.7	6.0'	171	1.7	1.5
16.0'	38	3.4	3.4	8.0'	20	6.0	3.3	8.0'	53	3.3	2.4	8.0'	84	2.6	2.0

CMH20MR16/830/FL 25°
9,000 Rated Life - 2,900 CBCP

D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
4.0'	187	1.7	1.7	3.0'	61	3.4	2.3	3.0'	131	2.3	1.8	3.0'	214	1.7	1.6
8.0'	47	3.6	3.6	4.0'	34	4.5	3.0	4.0'	75	3.0	2.4	4.0'	124	2.3	2.1
12.0'	21	5.4	5.4	6.0'	15	6.7	4.5	6.0'	33	4.4	3.6	6.0'	56	3.4	3.0
16.0'	12	7.1	7.1	8.0'	9	9.0	5.9	8.0'	19	5.9	4.8	8.0'	32	4.5	4.0

FC - approximate footcandles at center.

Available at www.GoodMart.com
877-402-6100
Lighting, Electrical, Tools, DataCom, HVAC,
Safety Products, Test & Measurement Devices