




TYPE _____

CATALOG# _____



EUNY

NEW YORK CITY APPROVED EMERGENCY UNIT

INDUSTRIAL SERIES

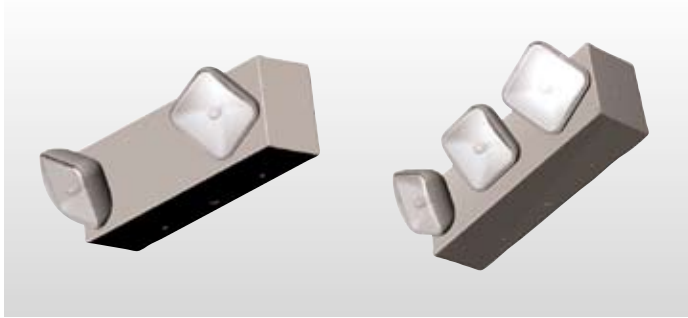

DIMENSIONS

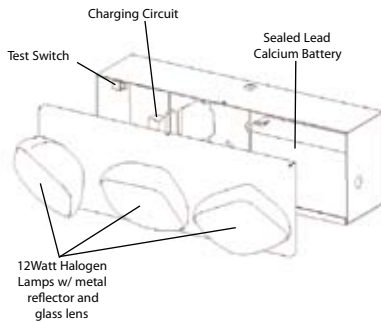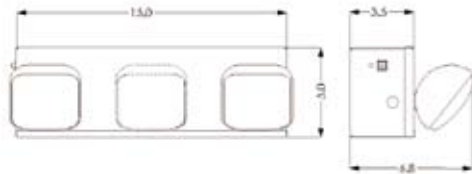

GENERAL DESCRIPTION

Industrial Series EUNY utilizes high quality steel construction without compromising style. This classic design can be used in even the most unique conception . AC indicator LED with test switch is Standard.

HOUSING

20-gauge steel construction provides superb corrosion resistance. Finished in black, white or your custom choice.

MOUNTING

Easy and quick installation facilitated with universal mounting plate and knockouts.

ILLUMINATION

Provided by unique precision formed photometrically-optimized fully-adjustable square heads with 10W bi-pin halogen lamps.

ELECTRONICS

Unit capacity up to 50 Watts.(60 W @ 12VDC) Input is dual volt standard 120/277 60Hz. Features solid state design with low voltage disconnect, AC lockout, brown-out protection, and AC indicator LED with test switch. Provides 90 minutes of illumination upon loss of power. Battery is maintenance-free sealed Lead Calcium.

CODE COMPLIANCE

Tested and Listed to UL 924 , meets or exceeds NFPA, NEC, and OSHA illumination standard. NYC Approved.

WARRANTY

5 years on housing and electronics with a 5 year pro rated warranty on battery.

EUNY

MODEL

TOTAL DC WATTAGE

NO. OF INTEGRAL HEADS

DC VOLTAGE

HOUSING COLOR

FACTORY INSTALLED OPTIONS

30W = 30 WATTS
50W = 50 WATTS

NH = NO HEADS
2 = TWO HEADS
3 = THREE HEADS

6 = 6V DC
12 = 12V DC

W = WHITE
B = BLACK

AM = AMMETER
LC = 3FT LINE CORD
NC = NICD BATTERY
PAR = 2 PAR36 HEADS
SD = SELF DIAGNOSTICS
TD* = TIME DELAY
VM = VOLTMETER

* MUST SPECIFY AC INPUT VOLTAGE AND DELAY TIME

