



# BFL250

type:


## LINEAR T8 FLUORESCENT

low profile linear T8 fluorescent architectural fixture for remote ballast installations


- SPECIFICATIONS**
- Fully assembled housing is formed, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
  - Standard finish is high reflectance white powder coat, applied post production
  - Installed end feed connector accepts 3/8" steel flex conduit (available separately)
  - Wired with 12' leads for instant start ballast operation
  - Easy mounting through provided holes in housing
  - Available for T8 13W, 14W, 15W, 17W, 25W, 32W, or 40W linear fluorescent lamp in single and tandem lamp models
  - UL and ULC listed for dry and damp locations
  - Requires a remote ballast and enclosure (ordered separately)
  - IBEW manufactured and labeled
  - Made in the U.S.A.

**NOTE:** Lamp holders are wired for instant start ballasts. For rapid start wiring, add suffix "/RS" to catalog number.

### PROFILE

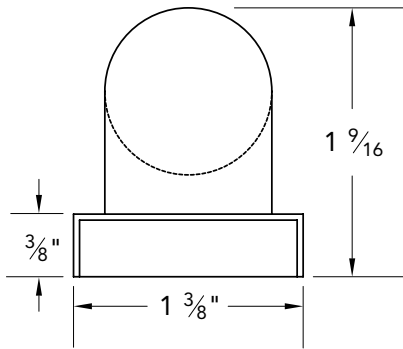


### PLAN

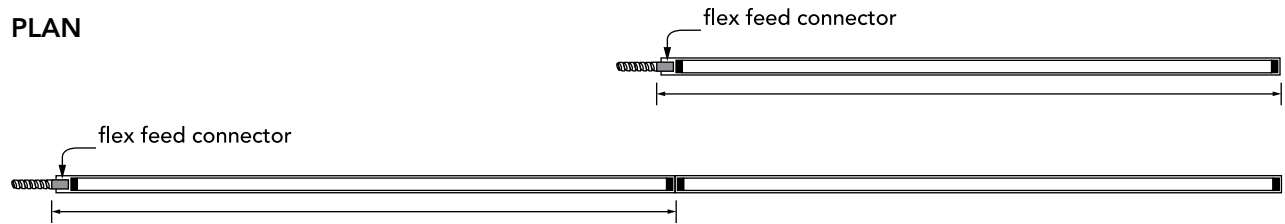

SPECIFICATION / ORDER FORMAT		DIMENSIONAL INFO.	
model no.	options	lamp	overall length
BFL250-13	/RS - rapid start wiring	13w T8	13 1/16"
BFL250-14	/DL - damp location	14w T8	16 9/16"
BFL250-15	/CU - custom finish (consult factory)	15w T8	19 1/16"
BFL250-17		17w T8	25 1/16"
BFL250-25		25w T8	37 1/16"
BFL250-32		32w T8	49 1/16"
BFL250-40		40w T8	61 1/16"
BFL250-59		59w T8	97 1/16"
BFL250-2525		2 x 25w T8	72 15/16"
BFL250-3232		2 x 32w T8	96 15/16"

**LENSES** | Two-piece system comprised of polycarbonate channel and striated snap-on cover




U8LNP	Clear fine prismatic acrylic lens with mounting clips (sold by the foot)	___ft.
U8LNCF	Frosted acrylic lens with mounting clips (sold by the foot)	___ft.

**TUBE GUARD |**


TG	Tube Guard (sold by the foot)	___ft.
----	-------------------------------	--------

**REFLECTORS** | 20 ga. steel construction, white powder coat finish (consult factory for optional reflector materials and finishes)




R1

<b>SYMMETRICAL</b>	<b>for fixture model</b>
250-R1-32	BFL250-32
250-R1-40	BFL250-40




R2

<b>ASYMMETRICAL</b>	
250-R2-32	BFL250-32
250-R2-40	BFL250-40



R3

<b>INSIDE ASYMMETRICAL</b>	
250-R3-32	BFL250-32
250-R3-40	BFL250-40



RE

<b>ELLIPTICAL</b>	
250-RE-32	BFL250-32
250-RE-40	BFL250-40

T8  
architectural LIGHTING

08.2010