

CONNECT-P-1C-GH

Product Code	Color	Part number	EAN Code
CONNECT-P-1C-GH-SM	white	97027	4007529970278



SM

Accessories	Color	Part number	EAN Code
IR-Adapter	black	92726	4007529927265
Wire basket BSK Ø 7.87 x 3.54 in / Ø 200 x 90 mm	white	92199	4007529921997

■ TECHNICAL DETAILS

Power supply:	110 - 277 V AC 50 / 60 Hz
Power consumption:	0.80W
Detection area:	oval 360°
Detection range:	Ø 144 ft / 44 m across Ø 98 ft / 30 m towards
Protection/ Pollution degree:	IP20 / Class II
Operating Temperature:	-13 °F to 122 °F / -25 °C to +50 °C
Housing:	Housing: UV- and shock resistant 5VA material
Remote controllable:	IR-Adapter for Smartphones
Relay:	Channel 1 (control the lighting potential free)
Switching power:	8.3 A @ 277 VAC
Max. rating:	Contact NO, w/tungsten pre-make contact
Time settings:	15 s - 30 min, pulse
Light values:	1 to 186 fc / 10 - 2000 Lux

PRODUCT INFORMATION


- Ideal Sensor for all high-bay applications.
- Combined movement detection and ambient light detection in a single unit.
- Additional, units can be networked to provided extended coverage.
- Easy adjustment of units, after installation with free smartphone app.
- Sensor can be overridden with standard high voltage switch.
- Clip on blinds are provided to prevent false triggers at the end of the aisle.
- Factory settings 10 min and 46 Foot-Candles.

B.E.G.

Controls


CONNECT-P-1C-GH

DIMENSIONS

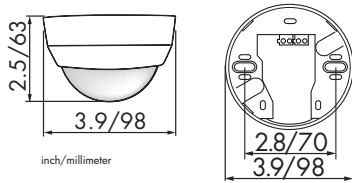


SM

RANGE DIAGRAM

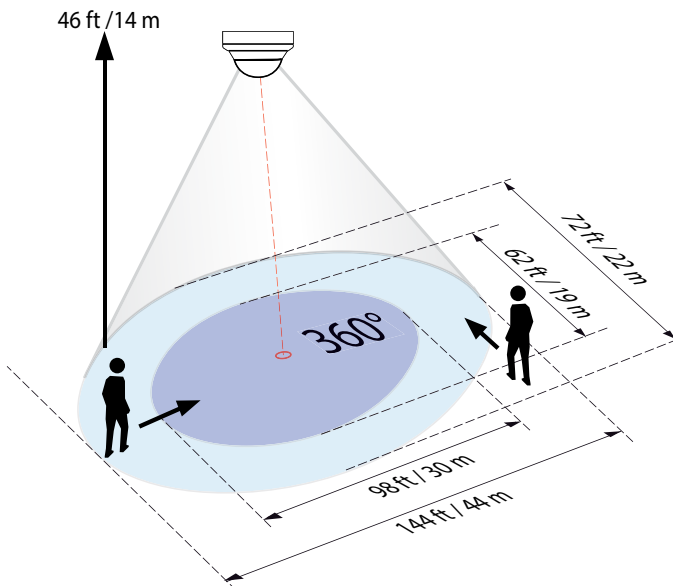

WIRING DIAGRAM

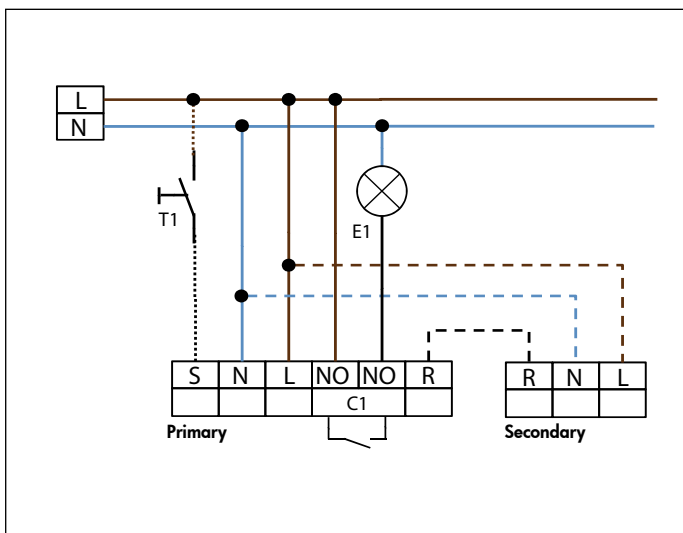

Note: Product specifications are subject to change without notice. Please consult the B.E.G. Controls web site for the most recent product specifications.