


# Sign Star™ Style 'B'

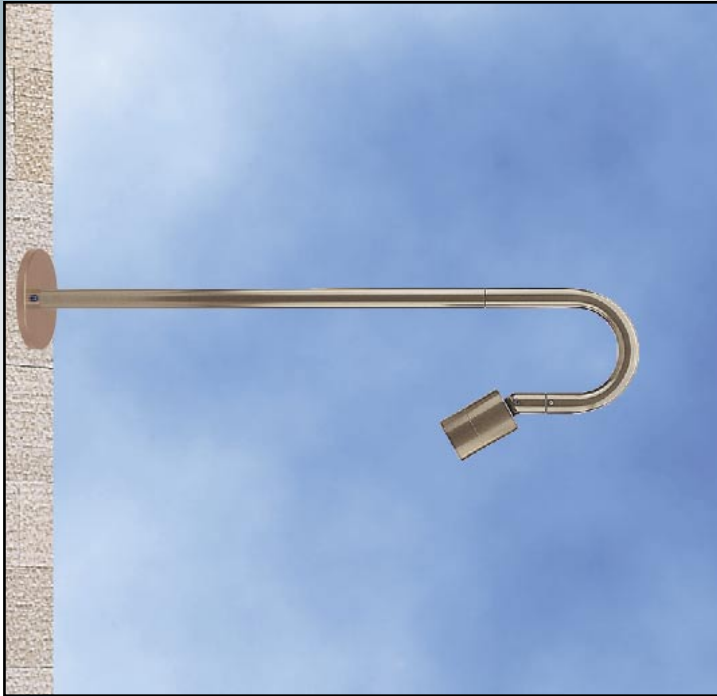


**Sign Star™ Style 'B'** will add its own unique architectural look to any sign lighting application. The contemporary styling can mount unobtrusively to most building facades. By specifying the rectilinear lens, the lighting designer can produce rectangular geometry on most signage. The one inch machined-aluminum stem and Nite Star™ fixture will provide years of trouble free performance. Sign Star can be specified for either remote or integral transformer applications and can be aimed in either an up or down lighting position. It is available in three cutoff styles: A, B, and C.

## Features

- Tamper proof design.
- 1" diameter machined aluminum stem with stainless steel hardware.
- Aluminum canopy. (Box gasket by others.)
- Utilizes machined aluminum Nite Star™.
-  &  Listed with MR16 lamps to 50 watts.
- For remote transformers, see page 97.

Sign Star Design Guide, see pages 124 and 125.

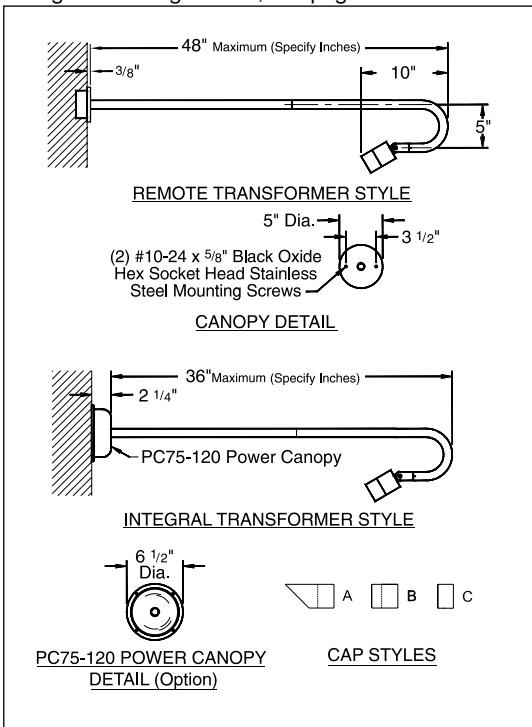

See page 96 for additional Power Canopy details.

## CATALOG NUMBER LOGIC

**Example:** SN - 8 - WHW - 9 - 11 - A - 30" - B - PC75-120

**Series** SN   **Lamp Type** 8   **Finish** WHW   **Shielding** 9   **Cap Style** 11   **Projection From Wall** A   **Style** 30"   **Options** B - PC75-120

- |                            |                             |
|----------------------------|-----------------------------|
| 0 - By others              | 16 - EYS(42W), 25° N. Flood |
| 1 - ESX(20W), 12° Spot     | 17 - EYP(42W), 40° Flood    |
| 2 - BAB(20W), 40° Flood    | 6 - EXT(50W), 13° Spot      |
| 3 - FRB(35W), 12° Spot     | 7 - EXZ(50W), 26° N. Flood  |
| 4 - FRA(35W), 23° N. Flood | 8 - EXN(50W), 40° Flood     |
| 5 - FMW(35W), 40° Flood    | 9 - FNV(50W), 60° W. Flood  |
| 15 - EYR(42W), 12° Spot    |                             |

Powder Coat Color	Satin	Wrinkle
Bronze	BZP	BZW
Black	BLP	BLW
White(Gloss)	WHP	WHW
Aluminum	SAP	---
Verde	---	VER

**Lens Type**  
9 - Clear (Standard), 10 - Spread, 12 - Soft Focus, 13 - Rectilinear

**Shielding**  
11 - Honeycomb Baffle

**Cap Style**  
A - 45°, B - 90°, C - Flush (Standard)

**Projection From Wall** (Specify Inches)  
18", 24", 30", 36" or \*48" \*(Not available with PC75-120 option)

**Style**  
B - 180° Radius

**Options**  
PC75-120 - Power Canopy™ with 75VA Transformer  
(For use with maximum 36" length.)

