

# 2060 LED

## STANDARD SPECIFICATIONS

### TRIM

Cold rolled 20 GA, formed with spinning and die punch tooling. The assembly also features threaded studs and is assembled with hardware.

### DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a decorative recess. Available in multiple hand painted finishes.

### PAN

Cold rolled 20 GA steel, formed with die punch tooling.

### LED PERFORMANCE

120-277V - 3500K, 82 CRI - L70 rating - 54,000 hours  
Source lumens noted. Amperage rated @ 110V input  
Max ambient temperature - 40°C / 104°F

B6LED - (1) B Series board - 6W nominal, .05 A input - 643 lm - 105 lm/W

B12LED - (2) B Series boards - 12W nominal, .10 A input - 1303 lm - 108 lm/W

C24LED - (2) C Series boards - 24W nominal, .20 A input - 2438 lm - 100 lm/W

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

### ORDERING INFORMATION

**2060** - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
Model                      2.                      3.                      4.                      5. (if required)

#### 2. FINISH

**STANDARD**  
**BN**    Brushed Nickel

**OPTIONAL**  
**AG**    Antique Gold  
**BL**    Black  
**BR**    Brick  
**BZ**    Bronze  
**CN**    Chestnut  
**DS**    Desert Stone  
**GD**    Gold Dust  
**GM**    Gun Metal  
**MB**    Metallic Bronze  
**NT**    Nickel Tone  
**OL**    Oak Leaf  
**PL**    Platinum  
**RB**    Rustic Bronze  
**RC**    Rustic Copper  
**WH**    White

**CUSTOM**  
Provide color sample or RAL code to match

#### 3. WATTAGE

**B6LED**    1-B Series board  
**B12LED**    2-B Series boards  
**C24LED**    2-C Series boards

#### 4. DIFFUSER

**STANDARD**  
**WA**    White Acrylic


**OPTIONAL**  
**FTA**    Faux Tortoiseshell Acrylic  
**IFA**    Ivy Flake Acrylic  
**PFA**    Platinum Flake Acrylic  
**RMA**    Rose Mist Acrylic  
**SFA**    Snow Flake Acrylic

#### 5. AVAILABLE OPTIONS

**30K**    3000K color temperature  
B6LED - 592 lm - 96 lm/W  
B12LED - 1174 lm - 98 lm/W  
C24LED - 2351 lm - 96 lm/W  
**40K**    4000K color temperature  
B6LED - 635 lm - 103 lm/W  
B12LED - 1275 lm - 106 lm/W  
C24LED - 2482 lm - 101 lm/W  
**BAC**    Buy American Compliant  
**DIM**    Dimming driver (120-277V) (B12LED & C24LED only)  
(0-10V dimming control required)  
**ES**    ENERGY STAR® (B12LED & C24LED only)  
**OCC**    Occupancy Sensor\*

\*Occupancy sensor operates with microwaves and is not recommended for use in waiting areas with elevators.

|                      |
|----------------------|
| <b>PROJECT:</b>      |
| <b>MODEL #:</b>      |
| <b>FIXTURE TYPE:</b> |

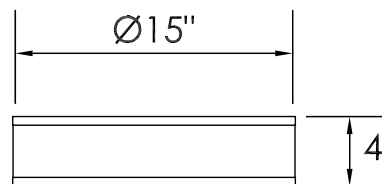

**DAMP**



Specifications and dimensions subject to change without notice.  
Consult your Brownlee Lighting representative for availability and ordering information.