


CTL5038
DRAMA
series
PAR38
Line Voltage Track Fixture

Catalog No. _____

Type _____

Project _____

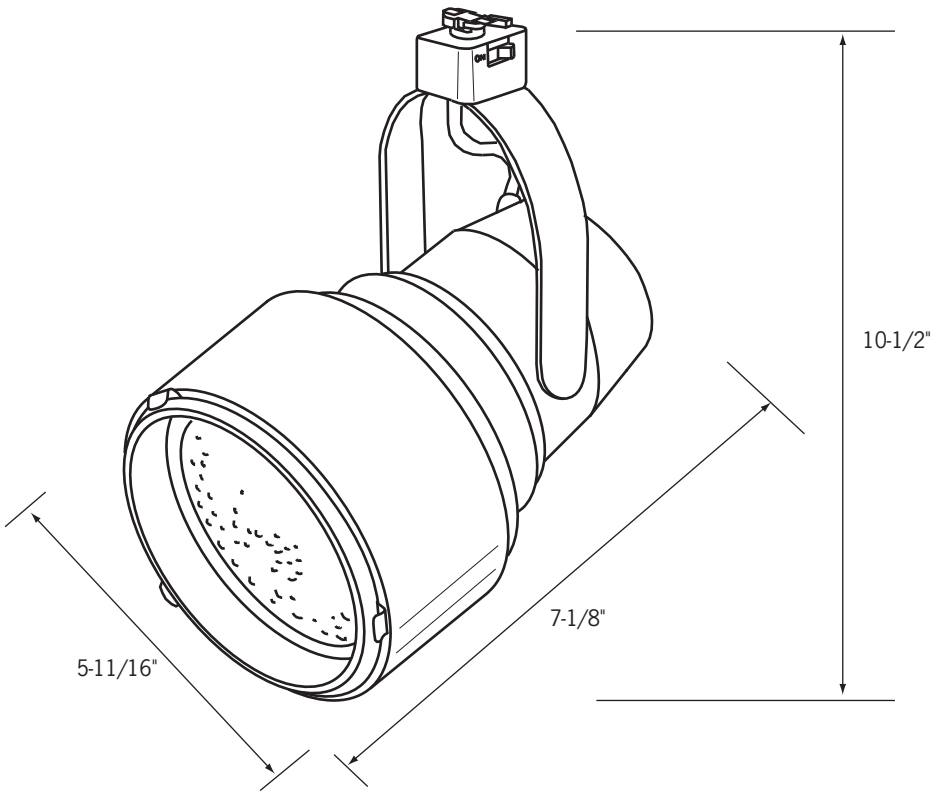

Specifications/Features

Fixture

Stepped back design creates a minimal size impression. Fixture design conceals lamp (if PAR30LN is used, the lamp face will be even with aperture). Integral ON/OFF switch and track polarity indicator are standard. Will accept (2) LF38 lenses within the aperture sleeve. (1) LF40 lens, Egg Crate Louver (LA-39) or Barn Doors (BD40) can sit within the FA-40 accessory holder.

Lamp

(1) 250W PAR38 lamp (max); 120V, E26 medium skirted base.

Warranty

This fixture is covered by Con-Tech's full one (1) year replacement guarantee after date of purchase.

Listing

cULus listed. Suitable for dry locations.

Ordering Information

Example Order: —

Fixture

CTL5038

Finish

B - Black
P - White
S - Silver

Accessory Holder

FA-40-(B, P, S)

Accessories

For Use Within Aperture Sleeve:
LF38 - A, B, CL, G, LB, R, RO, Y, 73, LS, SL, UV
 4-7/8" Dia. tempered glass lenses

For Use With Accessory Holder:
LF40 - A, B, CL, G, LB, R, RO, Y, 73, LS, SL, UV
 5-7/16" Dia. tempered glass lenses

LA-39 - Egg-Crate Louver
BD40 - Black Barn Doors

Color/Pattern Legend
-A (Amber), **-B** (Blue), **-CL** (Clear), **-G** (Green),
-LB (Light Blue), **-R** (Red), **-RO** (Rose), **-Y** (Yellow),
-73 (Spread Lens), **-LS** (Linear Spread Lens),
-SL (Soft Light), **-UV** (Optivex UV Filter)

