


SPECIFICATION SHEET

4" 2000 SERIES

IT2000E IT2000E

REMODEL HOUSING WITH
ELECTRONIC CONVERTER

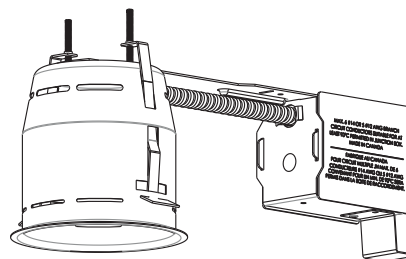

YES

Damp Location



MR16

MR16 50W MAX



Voltage

120 VOLTS (CAN & USA.)
277 VOLTS (USA ONLY)



Electronic converter 120V / 12V
Electronic converter 277V / 12V



Thermal
Protector

T°C 120°C No 031



OD Cut

4 1/4" (108mm)



UL
LISTED

E174023



Dimensions

Overall Dimensions :
Length : 13 1/16" (332mm)
Width : 5 1/4" (133mm)
Height : 3 3/16" (133mm)



COMPATIBLE TRIMS

50W MR16

R2000	S2000
R2000V (R2010V, R2030V)	S2051
R2020	S2100
R2051	T2000
R2100	T2000V (T2010V)
R2100VT	T2000VL (T2010VL)
R2100V(R2110V, R2130V)	T2000VS (T2010VS)
R2450VT	T2000VLS T2010VLS)

TECHNICAL SPECIFICATIONS

0,051" (1,3mm) thickness Galvanized Steel.
Below-ceiling accessible.
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
Takes up to 7/8" thick ceiling.
Perfect fit into ceiling.
No light leak.
Each part of the case should be at 3 "(76mm) MINIMUM from insulation (if applicable).

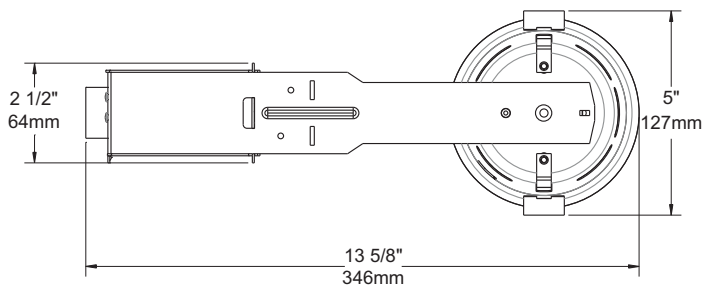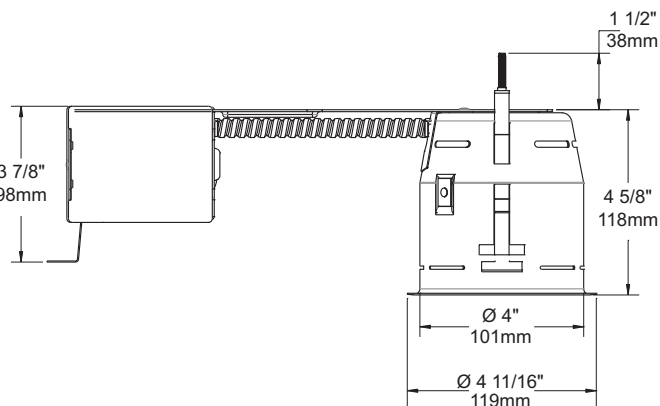

**MADE IN
CANADA**

**UL
LISTED**
Certified UL Standards

Your representative : _____

Your project : _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN, G6Z1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

FEBRUARY 2010