

SPECIFICATION SHEET

4" 2000 SERIES

T2000

ADJUSTABLE TRIM



YES

Damp Location



MR16

35-75W



GU/GZ-10

50W*





Insulated ceiling housing
ISMR2000E35, ISMR2000M, ISMR2000M35
ISMR2000E37, ISMR2000M37, ISMR2000T*



New construction housing
NW2000E, NW2000CE, NW2000CM,
NW2000LM, NW2000T*




Remodel housing
IT2000M, IT2000CM, IT2000E,
IT2000CE, IT2000T*

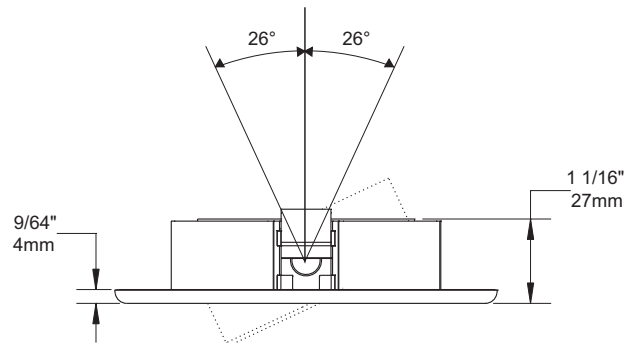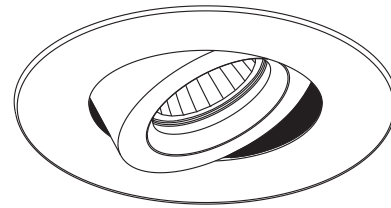

COMPATIBLE HOUSINGS

50W GU-GZ/10	75W MR16	50W MR16
ISMR2000T IT2000T NW2000T	NW2000LM	ISMR2000M IT2000E IT2000M NW2000CM NW2000E
42W MR16	37W MR16	35W MR16
IT2000CE IT2000CM NW2000CE	ISMR2000E37 ISMR2000M37	ISMR2000E35 ISMR2000M35

Ø 4 7/8"
124mm

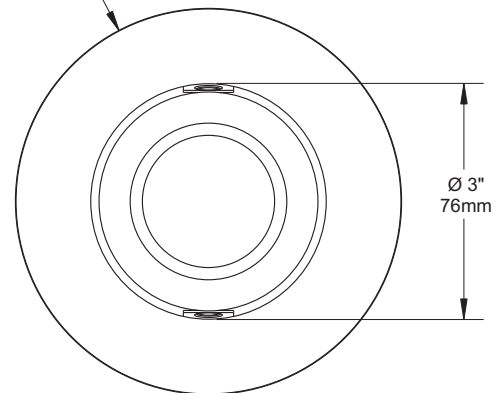

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

MADE IN CANADA

UL
LISTED
Certified UL Standards

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JULY 2010