

DATE

JOB NAME

TYPE

## Features

- Clean appearance
- Wall bracket mounted
- Steel housing and ends caps with textured finish
- Uses T8, T5 or T5HO lamps

## Applications

- Office Areas
- Retail Stores
- Class Rooms
- Libraries
- Restaurants

Series	Size	Lamps	Watts	Voltage	Mounting	Options
1050WM	4FT 8FT XFT (CONTINUOUS ROW MOUNTING)	1 2	32WT8 28WT5 54T5HO	120 277 UNV	WB—Wall Bracket	EM-EM Pack 1-Lamp EM2—EM Pack 2-Lamp (T8 ONLY) DB-Dimming Ballast SC-Separate Circuit CC-Custom Color

Ordering Example: 1050WM-4FT-2-54WT5HO-UNV-WB-EM

## Details

**Application Features:** Specification grade, suspended, high performance architectural luminaire. For use in indoor applications where a T5 or T5HO direct/indirect luminaire with maximum uplight as well as glare-free downlight is required. Available as individual fixtures or with end and intermediate units for mounting in continuous rows. Fixtures designed to mount on 4 foot and 8 foot centers.

**Construction:** Durable cold rolled 20 ga. steel body. Sufficient knock-outs provided for connections and through wiring.

**Finish:** Pre-treated phosphate bonded (rust inhibitor), white powder coated finish.

**Electrical:** Electronic ballasts are class P, thermally protected.

**Approvals:** UL Listed for damp location.

**Optics:** 95% enhanced anodized aluminum reflector and housing with slots with plastic overlay.


**Options:** Emergency Battery Backup, Dimming Ballast, Separate Circuit, Custom Colors, Spade End Caps.

**Light Distribution:**  
Indirect—95% Direct—5%

FRONT VIEW




8' MODEL

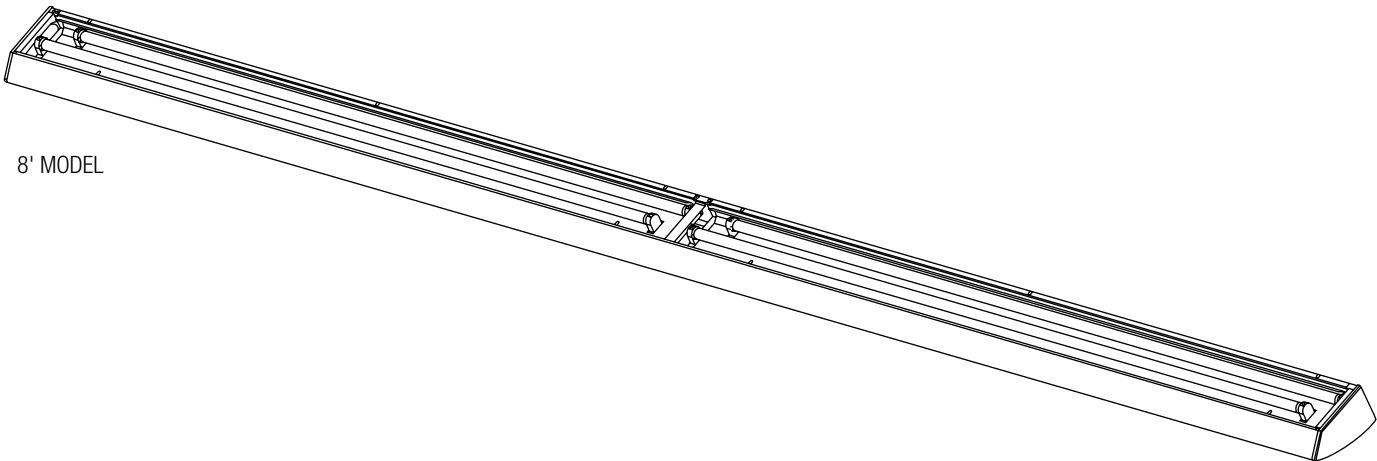

4' MODEL

TOP VIEW



8' MODEL

TOP VIEW

