


TYPE NO. _____

CATALOG NO. _____




R-1

Premium Grid 2 x 4 Troffer (GP)

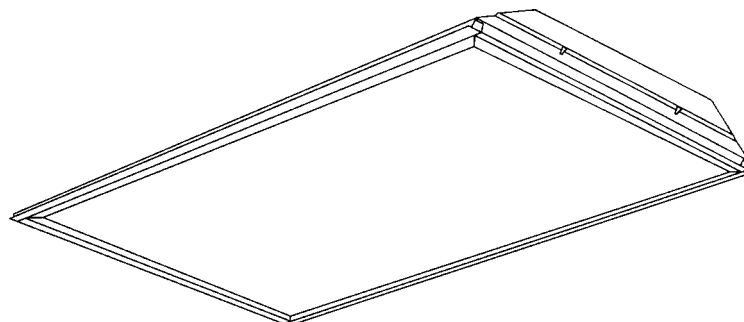

ORDERING INFORMATION

Catalog Number: Example: 24GP432FSA11K4Y

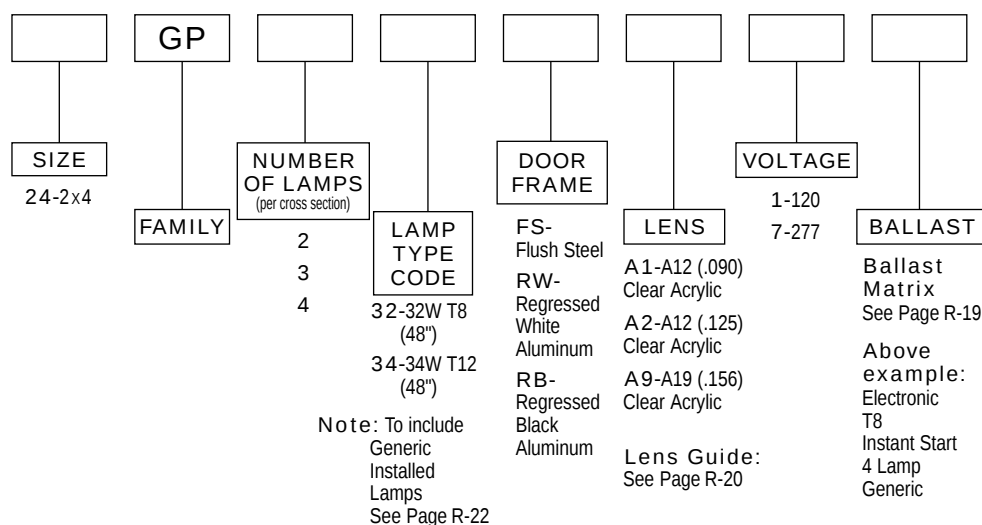

PRODUCT FEATURES


- Mitered door frame includes unique light-blocking construction which eliminates any need for gasketing or baffles.
- One-piece unitized housing with interlocking corners maintains structural integrity.
- Positive action cam latches firmly secure frame on either side.
- Easy lamping. No special slots or holes necessary for insertion of lamp pins.
- All lamps can be individually installed or removed in any order.
- All sides are turned in and hemmed for safe handling and installation.
- Built-in seismic tabs. No need to purchase separate clips.
- UL-listed twin knockout access plates.
- Captive-bolt ballast mounting.
- Four corner tie points for safety wire support when required.

OPTIONS

Options List See Page R-21
Suffix catalog number with Option Code

PRODUCT AVAILABILITY

Nominal Size	Family	Number of Lamps (per cross section)	Lamp Type Code	Height
2 x 4	GP	2	32, 34	3 5/8"
		3	32, 34	
		4	32, 34	




Safe Hemmed Edges



R-2 Premium Grid 2 x 4 Troffer (GP)

Three-Lamp 2 x 4 Photometric Data




Coefficients of Utilization

Floor Cavity Reflectance 0.20

Room Cavity Ratio	RC RW	80%			50%			10%		
		50	30	10	50	30	10	50	30	10
1		78	75	73	73	71	69	68	66	65
2		69	65	62	73	71	69	61	59	57
3		62	57	53	59	55	52	56	53	50
4		56	51	46	53	49	45	50	47	44
5		50	44	40	48	43	39	45	42	39
6		46	40	35	44	39	35	41	37	34
7		41	35	31	39	34	31	38	33	30
8		37	31	27	36	30	27	34	30	26
9		33	27	23	32	27	23	30	26	23
10		30	25	21	29	24	21	28	24	20

Four-Lamp 2 x 4 Photometric Data




Coefficients of Utilization

Floor Cavity Reflectance 0.20

Room Cavity Ratio	RC RW	80%			50%			10%		
		50	30	10	50	30	10	50	30	10
1		78	75	73	73	71	69	68	67	66
2		70	66	62	66	63	60	62	59	57
3		63	58	54	60	56	52	56	53	51
4		57	51	47	54	49	46	51	47	45
5		51	45	41	49	44	40	46	42	39
6		46	40	36	44	39	35	42	38	35
7		42	36	31	40	35	31	38	35	31
8		37	32	27	36	31	27	34	30	27
9		34	28	24	32	27	24	31	27	23
10		31	25	21	29	24	21	28	24	21

Two-Lamp 2 x 4 Photometric Data



Coefficients of Utilization

Floor Cavity Reflectance 0.20

Room Cavity Ratio	RC RW	80%			50%			10%		
		50	30	10	50	30	10	50	30	10
1		81	78	76	76	74	72	71	69	68
2		73	68	65	69	65	63	64	62	60
3		65	60	56	62	58	55	58	55	53
4		59	53	49	56	51	48	53	49	47
5		53	47	42	50	45	42	48	44	41
6		48	42	37	46	41	37	43	39	36
7		43	37	33	41	36	32	39	35	32
8		39	33	28	37	32	28	35	31	28
9		35	29	25	33	28	24	32	27	24
10		32	26	22	30	25	22	29	25	21

SPECIFICATIONS

Embossed housing/end combination is die-formed of cold rolled steel and includes interlocking corners to maintain structural integrity.

Baked white enamel finish provides a minimum reflectance factor of 85%.

Lens is prismatic pattern 12 virgin acrylic.


Mitered door frame which hinges from either side is held in place with positive action cam latches. Sides are hemmed for additional strength and safety in installation and handling. All units

are equipped with high power factor Class "P" ETL-CBM ballasts (120 volt 60 Hz is standard).

Fixtures are UL-listed and bear union and UL labels.

DIMENSIONS

All KOs are 7/8" dia.
unless otherwise specified.

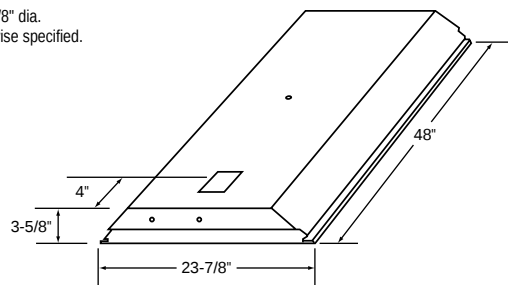

Dimensions and specifications subject to change without notice.



Available from www.goodmart.com