

CATALOG NO. _____



TYPE NO. _____

JOB NAME _____

11-10

Survi'VR Vandal-Resistant Luminaire (4' Linear Fluorescent)




ORDERING INFORMATION

Catalog Number: Example: SAO2541S2YBF

S	A							
SERIES	STYLE	LENS	LAMPS	WATTAGE	VOLTAGE	BALLAST SOURCE	COLOR	OPTIONS
S Survi'VR Series Vandal Resistant	A-Aluminum	O-Opal Poly C-Clear Poly	2	28-28W T5 32-32W T8 54-54W T5HO	1-120V 7-277V B-120-277V	N2Y-T5 K2Y-T8 S2Y-T5HO	B-Black W-White P-Bronze	2C-2 Circuit 3C-3 Circuit F-Fused RB-Row Beginning RM-Row Middle RE-Row End PC-Photo Control Battery Back-Up Consult Factory

PHOTOMETRIC DATA

Mounting Height = 8 ft.
Gridscale = 8 ft. per increment

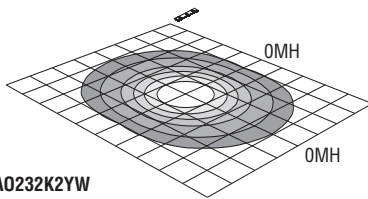

SA0232K2YW
4' Linear - Ceiling Mount
2-32w T8 fluorescent


Horizontal Footcandles
Lumen/Lamp = 2,850
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

PRODUCT SPECIFICATIONS

- Marine grade extruded aluminum side rails and back rails
- Precision die-cast, marine-grade aluminum
- Extruded, UV-stabilized polycarbonate available in prismatic opal or prismatic clear styles
- Electronic high-frequency with voltage sensing capability in T5, T5HO and T8 lamping
- Precision snap-tyte, spring-loaded sockets
- High-reflectance white pan reflector system
- Duraplex II polyester powder finish
- "LifeLyte" limited lifetime warranty
- UL listed for wet locations

TECHNICAL INFORMATION

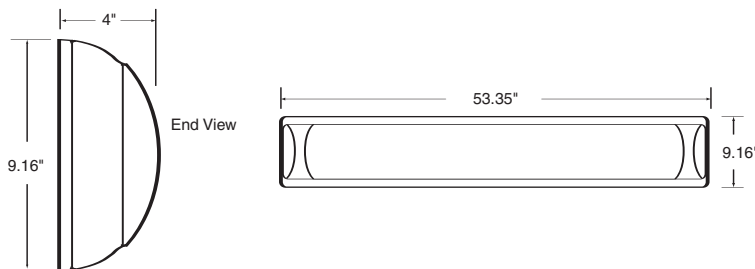

Purchase from
www.GoodMart.com

877-402-6100



UL Damp Location Listed.
UL File Number: E86021

