

EL-2SQ Series

Thermoplastic Unit with Adjustable Lighting Heads



Standard Features

- Two (2) fully adjustable glare-free 6V 5.4 watt DC T5 wedge base lamps for emergency mode egress light.
- Injection-molded UV stabilized thermoplastic housing and back plate. UL 94, 5VA flame rated.
- Sealed, maintenance-free Lead-Calcium batteries. Designed to power 11 watts remote load or extended unit run time.
- 120/277 VAC dual voltage operation. LED indicator light and push button test switch. Remote capacity may power additional remote heads (up to 6V-11W). Low voltage battery disconnect.
- Innovative, snap-together design allows for fast installation. Wall or ceiling mounting. Universal knock-out pattern on the back plate allows for junction box mounting.
- UL Listed. Complies with NEC, Life Safety Code and OSHA. Damp location listing is standard in all models.
- 3-year full warranty, excluding lamps and fuses

Suggested Specifications

The contractor will install the **EMERGI-LITE®** _____ battery unit. The emergency lighting system shall consist of fully automatic equipment with 2 MR16 glare free halogen heads. Each unit shall contain a fully automatic, solid state charger with test switch and AC on pilot light. The unit shall contain a solid state transfer circuit and low voltage disconnect circuit. The battery shall be 6 volts with a design life of 8 years with a capacity of 12 watts for 90 minutes. The unit shall be UL924 listed.

Note: This unit does not have remote capabilities. For units with remote capacity please refer to the DLM-2 series.

Unit Warranty*

Entire unit (excluding lamps) carries a 3-year Full Warranty.


Battery Warranty*

Sealed Lead-Calcium: 8-year life expectancy. 3-year Full Warranty, plus 3-year pro rata warranty.

*Subject to proper installation and maintenance.

Outline and Dimensions

Dimensions are approximate and subject to change.

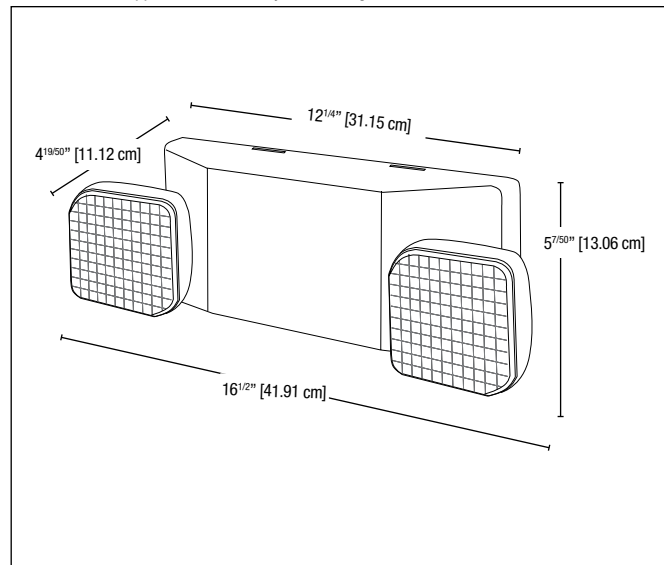

Accessories (order as a separate item)

Description	Add Suffix
Replacement battery	860.0018-E
Replacement lamp (standard)	570.0012-E
Vandal shield	VRS.BB
Vandal shield (NEMA 4X)	VRSBB.4X
Wire Guard (heads in any position)	WG10-E

How to Order

Series	Light Heads	Capacity Indicator
EL= Self-powered	-2SQ= Standard lamp 6V-5.4W Incandescent	Blank= No remote capacity R= 11 watts remote capacity* *Do not exceed rated unit capacity

EXAMPLE: EL-2SQR