

# 204 series

## Standard Applications

- Delamp 2' x 4' fixtures
- Enhance light levels and quality
- Substantial energy savings with excellent payback
- Light level flexibility to maximize savings
  - Material choice determines fixture efficiency
  - Ballast factor and lamp combinations
  - Lamp lumen output

## Features


- No replacement necessary for up to 25 years
- Standard sizes to fit most 2' x 4' troffers
- 25 bend design for maximum efficiency
- UL Classified as a ballast cover
- Allows tandem wiring in some applications
- Two, three and four lamp designs

## Installation

- Clip in reflector for easy installation
- Rounded edge brackets for installer safety
- Tek screw slots for easy lamp centering
- Standard brackets designed to fit most fixtures

## Maintenance

- Tool less ballast access
- Easily cleaned
- Fewer lamps and ballasts

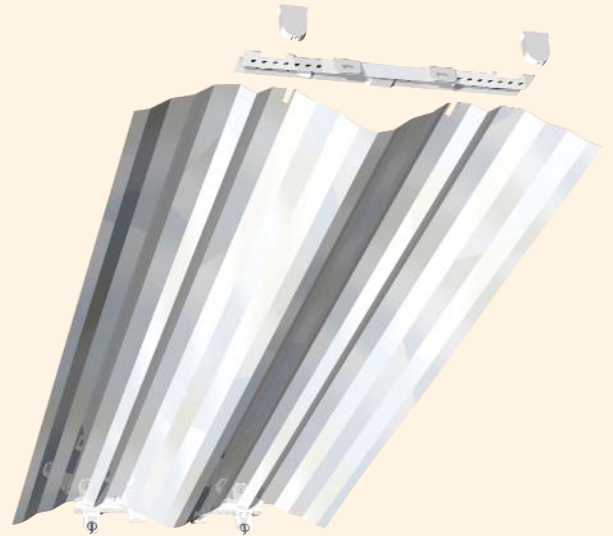

### Standard 204 Kit includes:

- (1) 2042 reflector made from specified material
- (2) 2000 series brackets
- (4) Twist lock shunted bi pin lampholders
- (5) Tek screws

**Lamps and electronic ballasts are also available.**



# 204 specifications

## Standard Dimensions

Reflector length:	45.5"
Reflector width:	20.5"
Reflector depth:	2.00"
Lamp spread:	9.75"

Cost-A-Mized or Custom Kits also available.

Shipping weight per kit: 2.10 lbs.

## Material Choices



- 91% White Paint
- 87% Anodized Aluminum
- 95% Enhanced Aluminum
- 93% Micro Matte

## Fixture Efficiency = 88%

Spacing Criteria:  $0^\circ = 1.2$   $90^\circ = 1.1$

Please call for a complete photometric report.

(2042/E/T8/TL7 used for test)

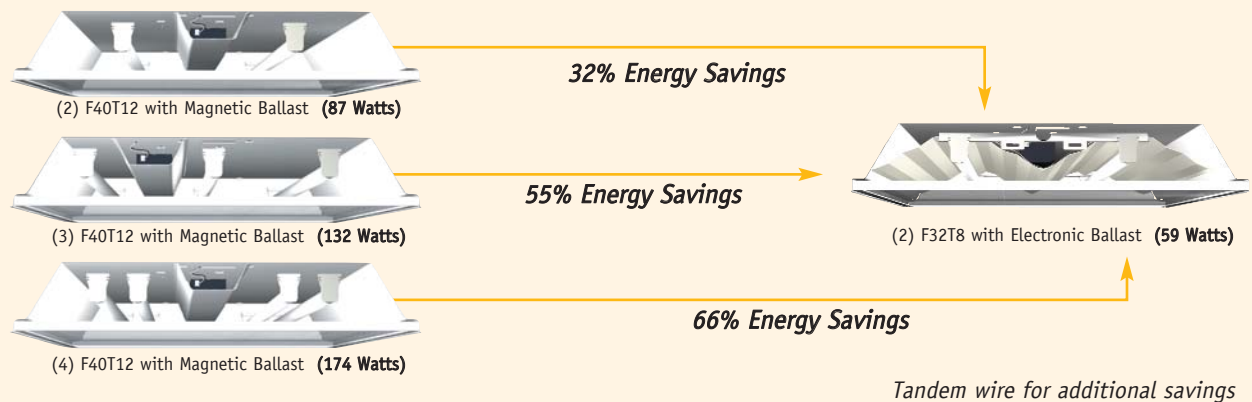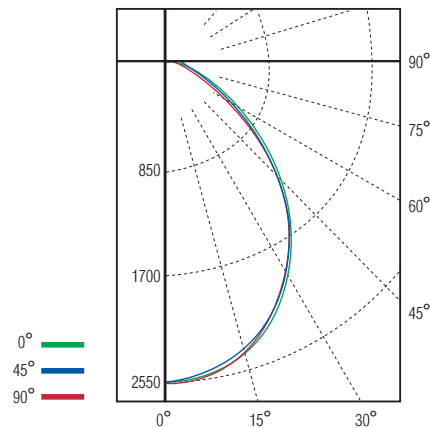

## Ordering Information

Sample number: 2042-E-T8-TL7

