

TRI 4213-UKI

PROJECT PROJÉT

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT


LIGHT SOURCE	INC LED	CFL	CFL DIM
MOUNTING	2401E	2402G	2402J
CABLE	70.50"	71.25"	47.75"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2401E Ø4.5" x 1" Ø114 x 25mm	2402G Ø5.25" x 1.75" Ø133 x 44mm	2402J Ø5.25" x 2.25" Ø133 x 57mm

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	--

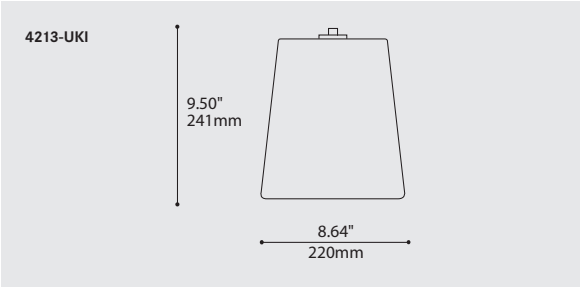



ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE			4213-UKI	
4213-UKI			TRI	
LIGHT SOURCE SOURCE LUMINEUSE				
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)				
CF.D.13		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE		
CF.T.32		26/32W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE		
CF.SP.26		26W, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)		
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)		
LED.8.30		8W, LED 3000K (WARM) (120V ONLY)		
LED.8.40		8W, LED 4000K (NEUTRAL) (120V ONLY)		
VOLTAGE VOLTAGE				
120V	120 VOLT			
277V	277 VOLT			
347V*	347 VOLT			
*ONLY AVAILABLE WITH CF.D.13 AND CF.T.32 (NON-DIMMING BALLAST)				
DIMMING OPTION OPTION DE GRADATION				
AVAILABLE WITH CF.T.32 ONLY				
MAXIMUM 36" AIRCRAFT CABLE LENGTH				
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)*			
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)*			
*SEE REFERENCE SECTION FOR OPTIONS PAGE 524				
CABLE CABLE			AC	
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE			
CABLE LENGTH LONGUEUR DE CABLE				
60	60" AIRCRAFT CABLE (STD LENGTH)			
**	CUSTOM AIRCRAFT CABLE LENGTH (MAX 180" FOR INC & LED, 168" FOR CFL) (PLEASE SPECIFY)			
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE			RC	
RC	ROUND CANOPY / PAVILLON ROND			
		FOR INC & LED: 1" CANOPY (2401E)		
		FOR CFL: 1.75" CANOPY (2402G)		
		FOR DIMMING CFL: 2.25" CANOPY (2402J)		
STRUCTURE FINISH FINI STRUCTURE			CHR	
CHR	CHROME			
DIFFUSER FINISH FINI DIFFUSEUR			ECR	
ECR	ECRU			

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

Design:	The soft pyramidal shape can be specified individually or grouped together in combinations
Suspension:	Easy to install and adjust aircraft cable mounting
Light Source:	8W LED in 3000K (Warm white) or 4000K (Neutral white); other light sources also available
Structure:	Die-formed steel canopy with machined fittings. Available in chrome finish
Shade:	Ceramic shade with glossy ecru glazing
Certified:	c-CSA-us
Conception:	Forme pyramidale douce s'installant individuellement ou en grappe
Suspension:	Facile à installer et ajuster sur câble d'acier
Source lumineuse:	DEL 8W disponible en 3000K (blanc chaud) ou 4000K (blanc neutre); autres sources disponibles
Structure:	Pavillon d'acier embouti et quincaillerie usinée. Disponible en fini chromé
Abat-jour:	Céramique avec vernissage lustré écru
Certifié:	c-CSA-us



SUSPENSION 4213

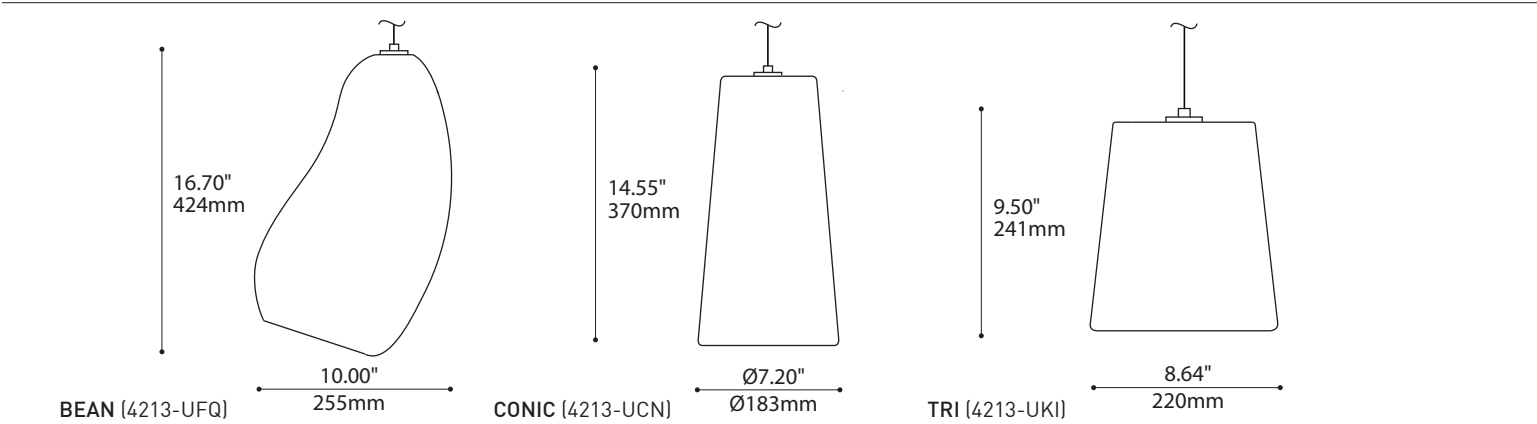
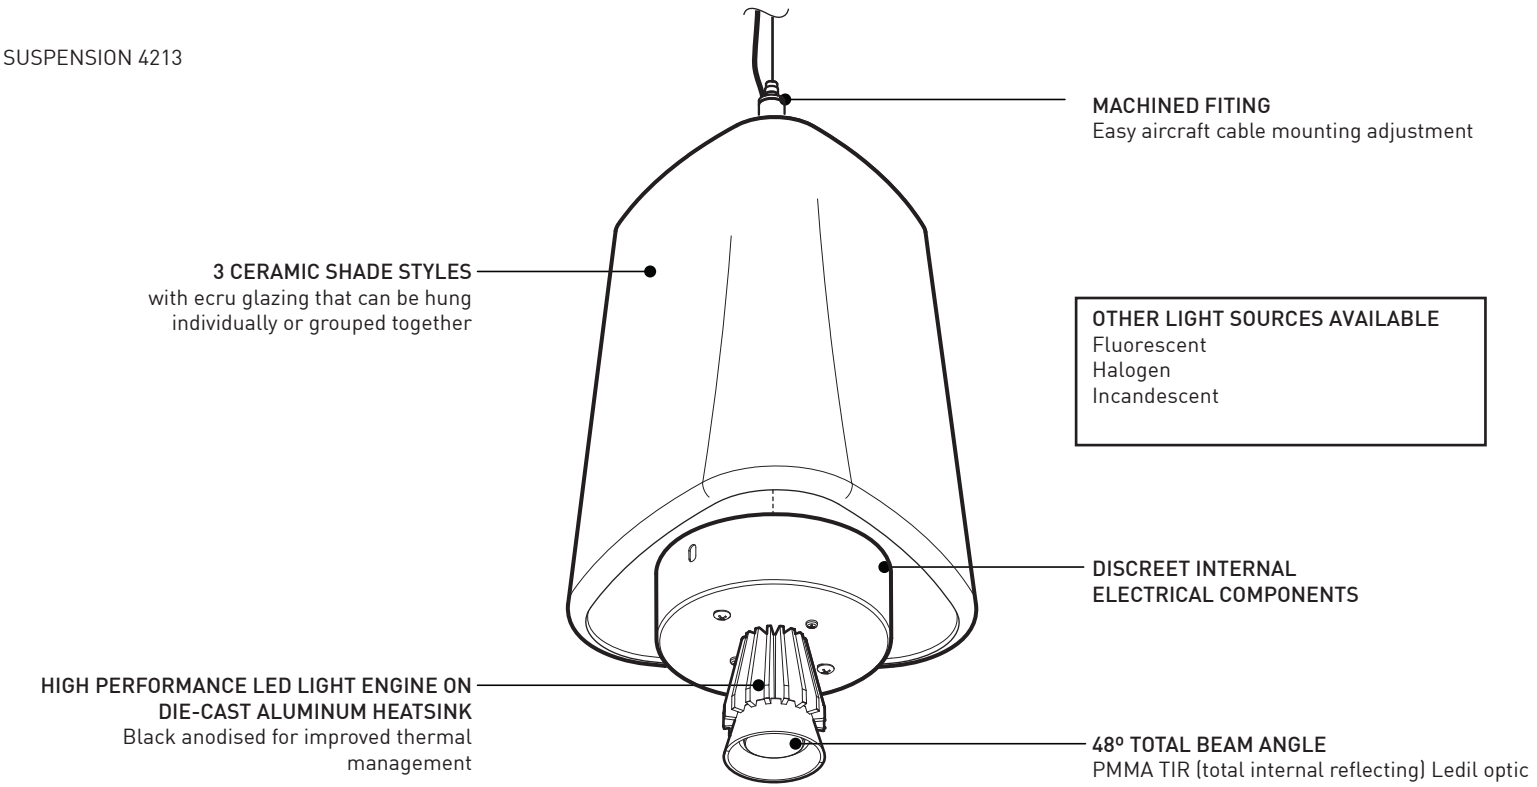


SPECIFICATIONS

LIGHT SOURCE
MODULE
LUMENS (ESTIMATED)
CRI
ROHS
OPTICS
VOLTAGE
DRIVER
LM-79
WARRANTY
CERTIFICATION

LED	Fluorescent	Incandescent
4 x Luxeon Rebel ES on MCPCB - total ±8 w	CFL 13/26/32 w	A19/T10 100 w
UL recognized - made in USA	N/A	N/A
560 lm (3000K) - 720 lm (4000K) initial	900 à 1800 lm	N/A
95 CRI (3000K) - 85 CRI (4000K)	N/A	N/A
Compliant		
LEDIL TIR - 48° total beam angle	N/A	N/A
120V - 240V	120V - 277V - 347V (non-dimming)	120V -277V
Hatch 700 mA	Smartmate Advance or equivalent	N/A
In process		
5 years (on electronic components)	3-5 years (on ballast, depending of the ballast)	
CSA recognized		

SUSPENSION 4213

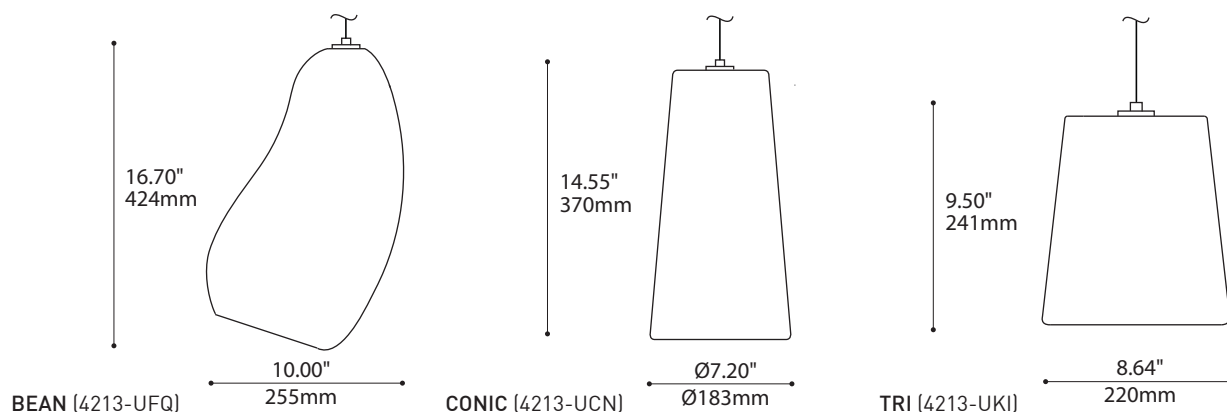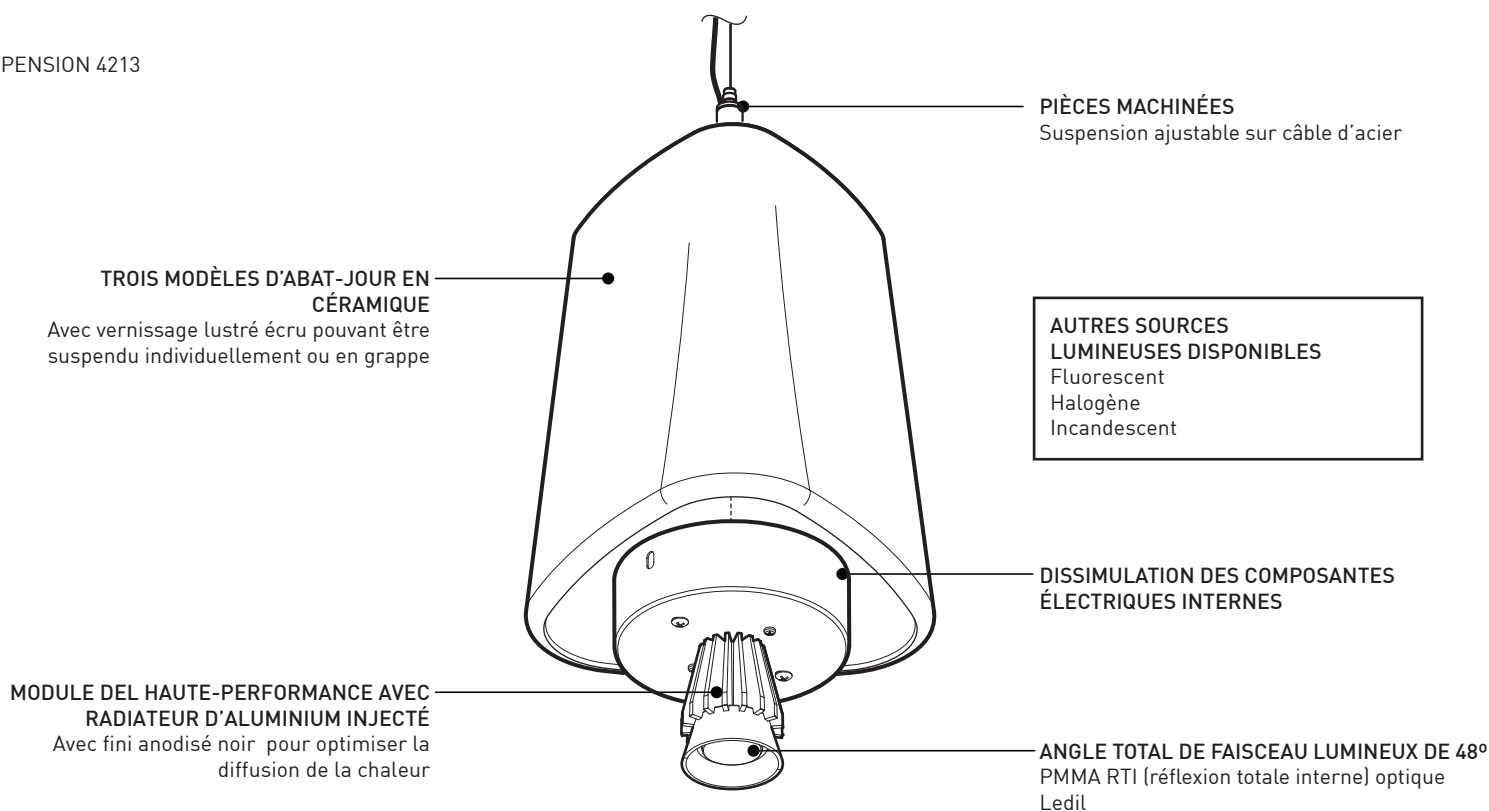

SPÉCIFICATIONS

SOURCE LUMINEUSE
MODULE
LUMENS (ESTIMÉ)
IRC
ROHS
OPTIQUE
VOLTAGE
PILOTE
LM-79
GARANTIE
CERTIFICATION

DEL

4 x Luxeon Rebel ES sur MCPCB - total ± 8 w
Reconnu par UL - Fabriqué aux États-Unis
560 lm (3000K) - 720 lm (4000K) initial
95 IRC (3000K) - 85 IRC (4000K)
Conforme
LEDIL RTI - angle total de faisceau lumineux de 48°
120V - 240V
Hatch 700 mA
En cours
5 ans (sur les composants électroniques)
Reconnu par CSA

Fluorescent

CFL 13/26/32 w
N/A
900 à 1800 lm
N/A
N/A
120V - 277V - 347V (sans gradation)
Smartmate Advance ou équivalent

Incandescent

A19/T10 100 w
N/A
N/A
N/A
N/A
120V - 277V
N/A