

KOLOKOL 4452

PROJECT PROJET

SPEC TYPE

NOTES



BIM

DIM

IES

OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK 1 CIRCUIT	INC TRACK 2 CIRCUIT	INC	CFL	CFL DIM CMH ELEC	CMH ELEC 150W
MOUNTING	2734B	2764B	2401E	2402G	2402J	2403K
CABLE	-	-	77.15"	77.90"	54.40"	78.65"
STEM	53.35"	53.95"	53.00"	53.75"	54.25"	54.50"

* FOR CMH ELEC, ADD 24.00"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2764B	2401E	2402G	2402J	2403K
1.46" x 1.36" 37 x 35mm	3.29" x 1.96" 84 x 48mm	Ø4.5" x 1" Ø114 x 25mm	Ø5.25" x 1.75" Ø133 x 44mm	Ø5.25" x 2.25" Ø133 x 57mm	Ø7.63" x 2.5" Ø194 x 64mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	AC CABLE STD 60" 1523mm
--------------------------	-------------------------------

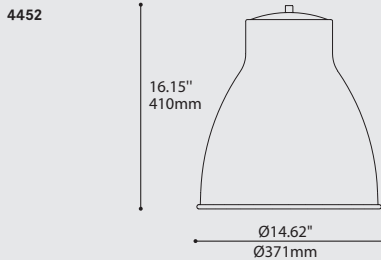

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4452

4452 KOLOKOL

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

CFT.57*		57W, CFL, TRIPLE TWIN TUBE, G24Q5 BASE
CFT.42*		26/32/42W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24QU BASE
INC.200		200W, INC, A21 / HAL T10, MEDIUM BASE (120V ONLY)
MH.PR.E.70*(19)		70W, MH, BD17, E17, ED17 MEDIUM BASE (ANSI M98 / M139), PROTECTED, ELECT. BALLAST
MH.PR.E.100*(19)		100W, MH, BD17 / E17 / ED17, MEDIUM BASE (ANSI M90 / M140), PROTECTED, ELECT. BALLAST

*NOT AVAILABLE WITH A TRACK ADAPTOR
 (19)USE LAMP FOR OPEN LUMINAIRE

VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT
347V**	347 VOLT

*NOT AVAILABLE WITH A TRACK ADAPTOR

**ONLY AVAILABLE WITH CFT.42 ONLY, CFT.57 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH CFT.42 ONLY, MAXIMUM 36" STEM / AIRCRAFT CABLE LENGTH

DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)*
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)*

*SEE REFERENCE SECTION FOR OPTIONS PAGE 524

STEM OR CABLE TIGE OU CABLE

S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE
AC*	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

*NOT AVAILABLE WITH A TRACK ADAPTOR

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

36	36" STEM (STD LENGTH)
60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM STEM LENGTH (MAX 96") (PLEASE SPECIFY)
**	CUSTOM AIRCRAFT CABLE LENGTH (MAX 180" FOR INC, 168" FOR CFL, 60" FOR MH ELEC) (PLEASE SPECIFY)

FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC		ROUND CANOPY / PAVILLON ROND FOR INC: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL & ELECTRONIC MH 70-100W: 2.25" CANOPY (2402J) FOR ELECTRONIC MH 150W: 2.5" CANOPY (2403K) TRACK ADAPTOR / ADAPTEUR DE RAIL*
TA1		1 CIRCUIT INC 120V ADAPTOR (2734B)
TA2		2 CIRCUITS INC 120V ADAPTOR (2764B)

*SEE TRACKS & ACCESSORIES PAGE 505

MOUNTING OPTION OPTION DE MONTAGE

SCA*	SLOPE CEILING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)
------	---

*ONLY AVAILABLE WITH A STEM

TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL(14)

WH	WHITE
BLK	BLACK
M G	METALLIC GRAY (1 CIRCUIT ONLY)

(14) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE (15)

SC	SATIN CHROME
BLK*	BLACK
WH*	WHITE

(15) INCLUDING CANOPY FINISH IF A CANOPY IS SELECTED

*LONGER LEAD TIME

SHADE FINISH FINI ABAT-JOUR

SA	SATIN ALUMINIUM
----	-----------------