

# Refit Solutions from GE



Application illustration only, subject lamps not used in photo.

## Integrated LED Tubes - 2, 3 and 4 foot

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by an internal GE Lightech™ driver. GE integrated LED tubes run on electronic T8 instant-start or programmed start ballasts.

### FEATURES

- 2', 3' & 4' tubes
- 950 – 2,800 lumens
- >100 total system lumens per watt (LPW)
- Available in 3000K, 3500K, 4000K, and 5000K color temperatures
- 50,000-hour rated life
- Dimmable - on PRS ballast
- DLC listed (2ft. and 4ft.)
- UL and cUL listed
  - in compliance with UL 1598 certification
- Open or Enclosed Fixtures
- 5 year limited warranty

### BENEFITS

- Fast and Easy LED upgrade
- Low energy LFL replacement
- 66% longer life than LFL (50,000 vs. 30,000 hours)
- Better quality of light
  - no UV
  - instant on
- Shatter resistant
  - prevents breakage and downtime
- Easy disposal, non-hazardous waste

To learn more about saving money and energy, go to: [gelighting.com/ThinkLED](http://gelighting.com/ThinkLED)

When you Think LED lighting, Think GE.

ecomagination<sup>SM</sup>



imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

# Product Specifications

## Integrated Refit LED Tubes


GE Product Code	Description	Bulb Shape	Base	Low BF Watts	Normal BF Watts	High BF Watts	Case Qty	Length (in)	Low BF Initial Lumens	Normal BF Initial Lumens	High BF Initial Lumens	Color Temp (°K)	CRI	Rated Life (L70)	DLC Listed
<b>2ft LED Tube</b>															
31557	LED9ET8/2/830	T8	Med Bi-Pin(G13)	8	9	13	25	24"	950	1100	1600	3000	80	50,000	Yes
26635	LED9ET8/2/835	T8	Med Bi-Pin(G13)	8	9	13	25	24"	950	1100	1600	3500	80	50,000	Yes
26648	LED9ET8/2/840	T8	Med Bi-Pin (G13)	8	9	13	25	24"	950	1100	1600	4000	80	50,000	Yes
26676	LED9ET8/2/850	T8	Med Bi-Pin(G13)	8	9	13	25	24"	950	1100	1600	5000	80	50,000	Yes
<b>3ft LED Tube</b>															
31554	LED12ET8/3/830	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1200	1400	1900	3000	80	50,000	-
26544	LED12ET8/3/835	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1200	1400	1900	3500	80	50,000	-
26625	LED12ET8/3/840	T8	Med Bi-Pin (G13)	10	12	16	25	36"	1200	1400	1900	4000	80	50,000	-
26627	LED12ET8/3/850	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1200	1400	1900	5000	80	50,000	-
<b>4ft LED Tube</b>															
31550	LED18ET8/4/830	T8	Med Bi-Pin(G13)	15	18	23	25	48"	1800	2200	2800	3000	80	50,000	Yes
93133	LED18ET8/4/835	T8	Med Bi-Pin(G13)	15	18	23	25	48"	1800	2200	2800	3500	80	50,000	Yes
93135	LED18ET8/4/840	T8	Med Bi-Pin (G13)	15	18	23	25	48"	1800	2200	2800	4000	80	50,000	Yes
93140	LED18ET8/4/850	T8	Med Bi-Pin(G13)	15	18	23	25	48"	1800	2200	2800	5000	80	50,000	Yes

### Savings Breakdown

Save 66% compared to standard T8 (4-lamp) light fixtures over a five-year period.

Provides 4400 lumens at 36W vs. 6600 lumens at 148W in a 4 lamp T12 system.

### Cumulative Energy Costs

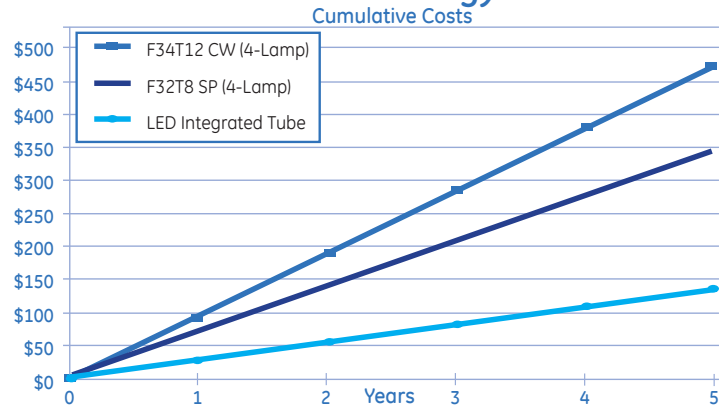

Savings calculations are based on energy costs using \$0.11 per kWh and 16 hours of daily operation.



Product is compliant with material restriction requirements of RoHS



[www.gelighting.com](http://www.gelighting.com)

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

LEDL029 (Rev 9/22/15)