



The bright white radiance of GE's LED retail PAR38 lamps are not just something you see, it's something you feel.

LED retail PAR38 lamps

PERFORMANCE DATA

Directional Lamps (PAR)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Equivalent	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information	
PAR38 - Low Glare - Visual Comfort Lens™																		
PAR38	MED	12	63228	LED12DP38W830/15	120	6	5.3	1000	13500	3000	80	90W	25,000	Yes	★	Dry	Spot, 15° beam, White	
			63233	LED12DP38W830/25	120	6	5.3	1000	4800	3000	80	90W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			63323	LED12DP38W827/25	120	6	5.3	960	4600	2700	80	90W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			63329	LED12DP38W827/40	120	6	5.3	960	1800	2700	80	90W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			63330	LED12DP38W930/15	120	6	5.3	860	11400	3000	91	90W	25,000	Yes	★	Dry	Spot, 15° beam, White	
			63332	LED12DP38W930/40	120	6	5.3	860	1600	3000	91	90W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			63334	LED12DP38W927/25	120	6	5.3	820	3900	2700	91	90W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			63343	LED12DP38W927/40	120	6	5.3	820	1550	2700	91	90W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			92969	LED12D38W3827/25	120	6	5.31	1050	5500	2700	81	100W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			92971	LED12D38W3827/40	120	6	5.31	1050	2300	2700	81	100W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			92972	LED12D38W3830/25	120	6	5.31	1050	5500	3000	81	100W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			92973	LED12D38WO383040	120	6	5.31	1050	2300	3000	80	100W	25,000	Yes	★	Wet	Flood, 40° beam, White	
PAR38	18	18	94909	LED18D38W830/15	120	6	5.3	1400	8700	3000	80	85W	25,000	Yes	★	Dry	Spot, 15° beam, White	
			94549	LED18D38W830/25	120	6	5.3	1400	5100	3000	80	100W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			94910	LED18D38W830/40	120	6	5.3	1400	2800	3000	80	120W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			94903	LED18D38W930/15	120	6	5.3	1200	7500	3000	91	75W	25,000	Yes	★	Dry	Spot, 15° beam, White	
			94904	LED18D38W930/25	120	6	5.3	1200	4400	3000	91	100W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			94905	LED18D38W930/40	120	6	5.3	1200	2400	3000	91	120W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			94901	LED18D38W927/15	120	6	5.3	1100	7100	2700	91	75W	25,000	Yes	★	Dry	Spot, 15° beam, White	
			94198	LED18D38W927/25	120	6	5.3	1100	4100	2700	91	95W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			94902	LED18D38W927/40	120	6	5.3	1100	2300	2700	91	120W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			92923	LED18D38W3927/25	120	6	5.31	1250	4900	2700	92	100W	25,000	Yes	★	Dry	Narrow Flood, 25° beam, White	
			92933	LED18D38W3930/25	120	6	5.31	1350	5200	3000	92	100W	25,000	-	★	Dry	Narrow Flood, 25° beam, White	
			92934	LED18D38W3930/40	120	6	5.12	1350	3200	3000	92	120W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			92950	LED18D38OW382725	120	6	5.12	1550	5800	2700	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			92958	LED18D38OW382740	120	6	5.12	1550	3800	2700	81	120W	25,000	Yes	★	Wet	Flood, 40° beam, White	
			92963	LED18D38OW383025	120	6	5.12	1550	6000	3000	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			92967	LED18D38OW383040	120	6	5.12	1550	4000	3000	81	150W	25,000	Yes	★	Wet	Flood, 40° beam, White	
			92926	LED18D38W3927/40	120	6	5.12	1250	2900	2700	92	120W	25,000	Yes	★	Dry	Flood, 40° beam, White	
			85085	LED18D38OW383525	120	6	5.31	1700	6500	3500	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
87917	LED18D38OW383540	120	6	5.31	1700	4400	3500	81	150W	25,000	Yes	★	Wet	Flood, 40° beam, White				
93171	LED18D38OW384025	120	6	5.31	1700	6500	4000	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White				
83811	LED18D38OW384025	120	6	5.31	1700	6500	4000	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, Silver				
93172	LED18D38OW384040	120	6	5.31	1700	4400	4000	81	150W	25,000	Yes	★	Wet	Flood, 40° beam, White				
65730	LED18D38OW385025	120	6	5.31	1700	6500	5000	81	120W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White				
65731	LED18D38OW385040	120	6	5.31	1700	4400	5000	81	150W	25,000	Yes	★	Wet	Flood, 40° beam, White				

For additional product and application information, please consult GE's website: gelighting.com/ThinkLED



Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

★ ENERGY STAR® status: Certified as meeting ENERGY STAR® guidelines.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry - Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.


Location, wet - Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

^ Incandescent or Halogen wattage equivalencies based on ENERGY STAR® guidelines using lumens or CBCP according to lamp type




imagination at work

CHROMATICITY DIAGRAM

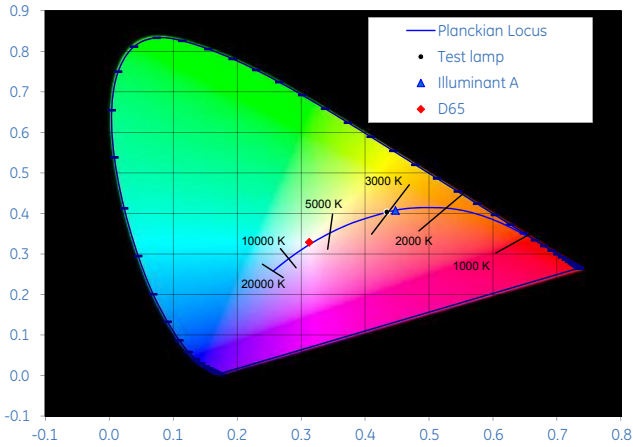


SPECTRAL POWER DISTRIBUTION

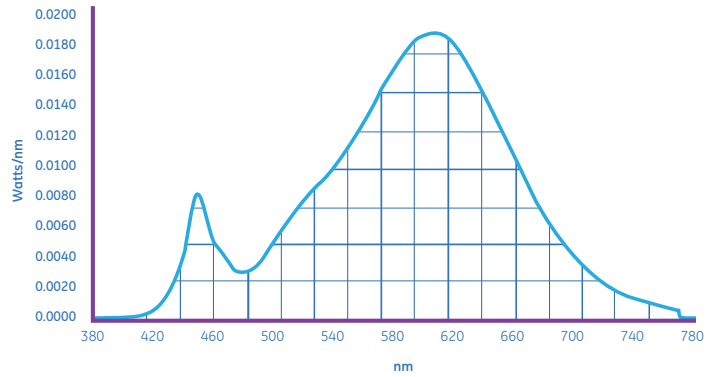


15° BEAM

POLAR PLOT - 15° BEAM

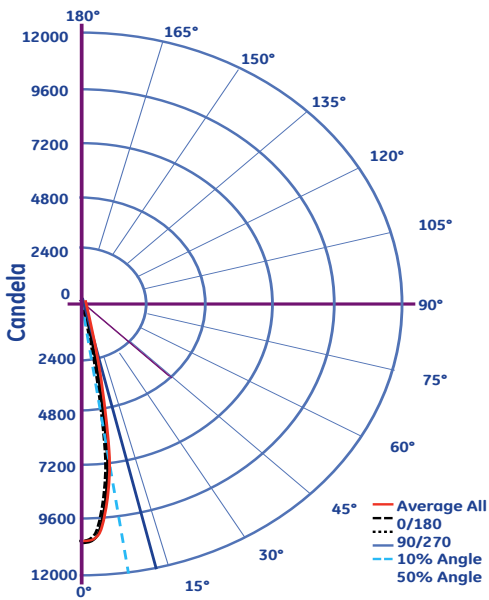

CONE DIAGRAM

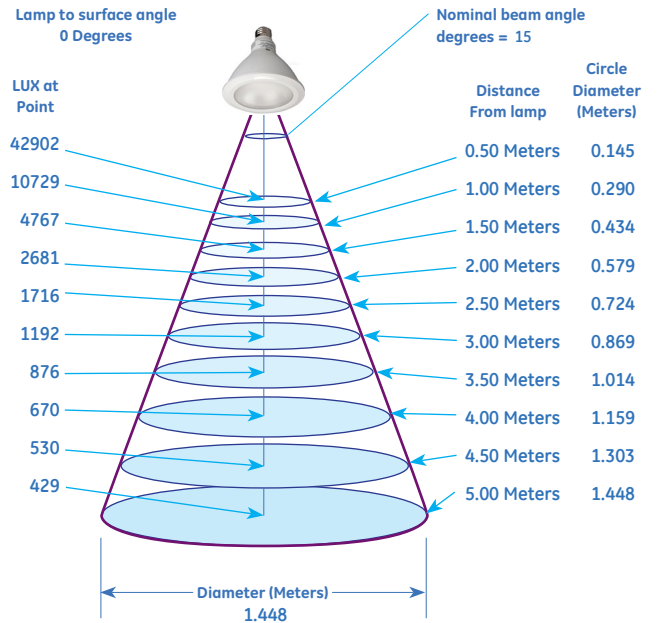


For additional product and application information, visit www.gelighting.com/ThinkLED


Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

25° BEAM

POLAR PLOT – 25° BEAM

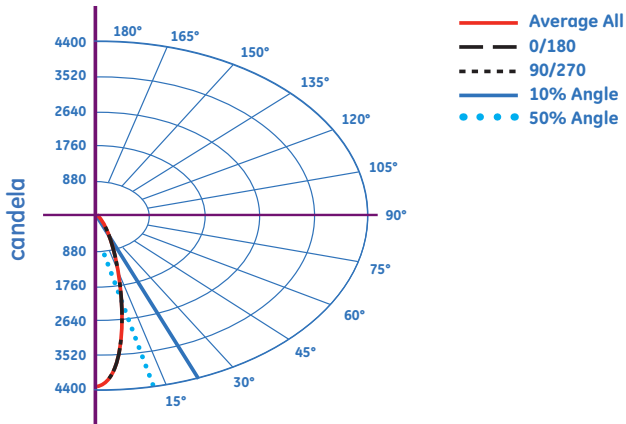


CONE DIAGRAM

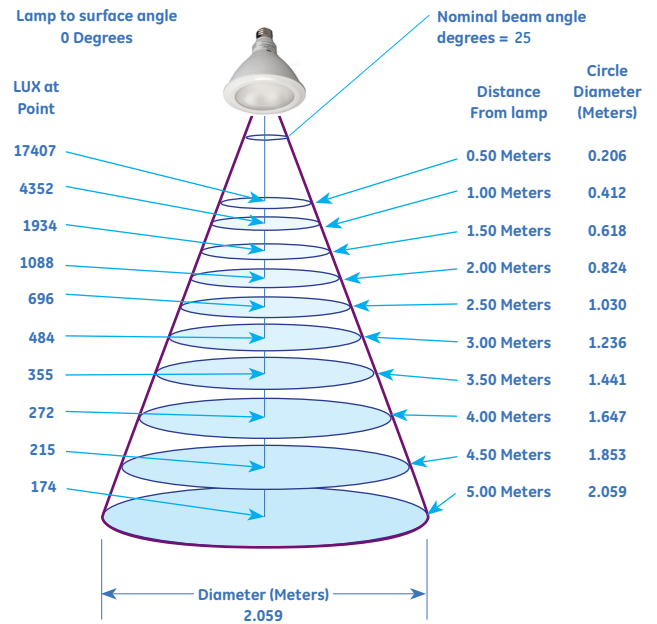


40° BEAM

POLAR PLOT – 40° BEAM

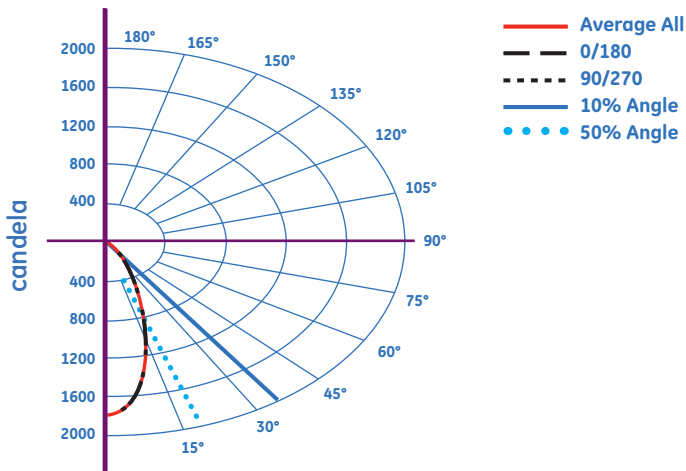

CONE DIAGRAM

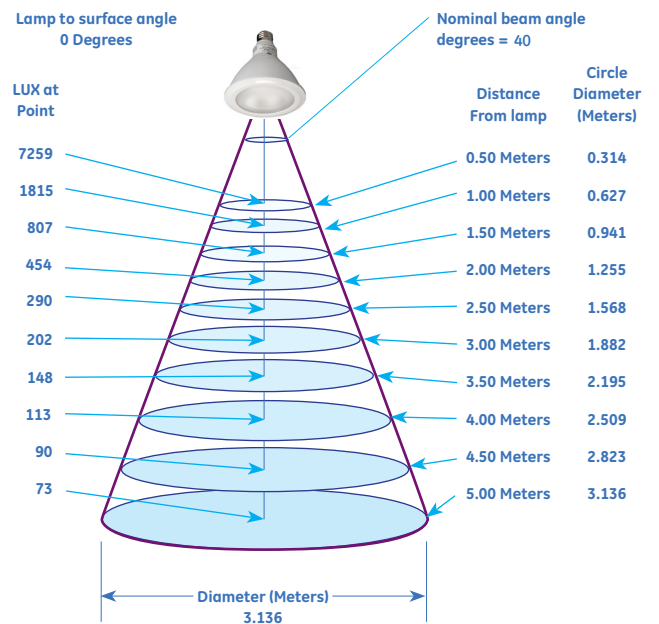

For additional product and application information, visit www.gelighting.com/ThinkLED

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.



ecomaginationSM

Product is compliant with material restriction requirements of RoHS
ENERGY STAR[®] and the ENERGY STAR[®] logo are registered U.S. marks



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

69195 (Rev 6/10/15)