


## GO LED Flat Panel

Dimmable / Networkable LED General Lighting Fixture

Model Name	GFS03
Size	598mm x 598mm x 63mm (2' x 2' x 2.5" nominal)
Power Consumption	40W to 60W Power factor +.9
Available CCT	3000K to 6500K
Illumination Data	Up to 3800lm@4000K+85 CRI (65 lm / W)
Material	Aluminium Frame, polycarbonate lens
Voltage	VAC/VDC 90~290, 50~60Hz, UL Class 2 O/P
Control Method	0-10V standard, networkable
Control System	GO Intelligent Control (GICS) optional
Installation Kit	T-bar drop-in
Warranty	3 years Limited
L70	+60,000 Calculated hours
Safety	UL Certified

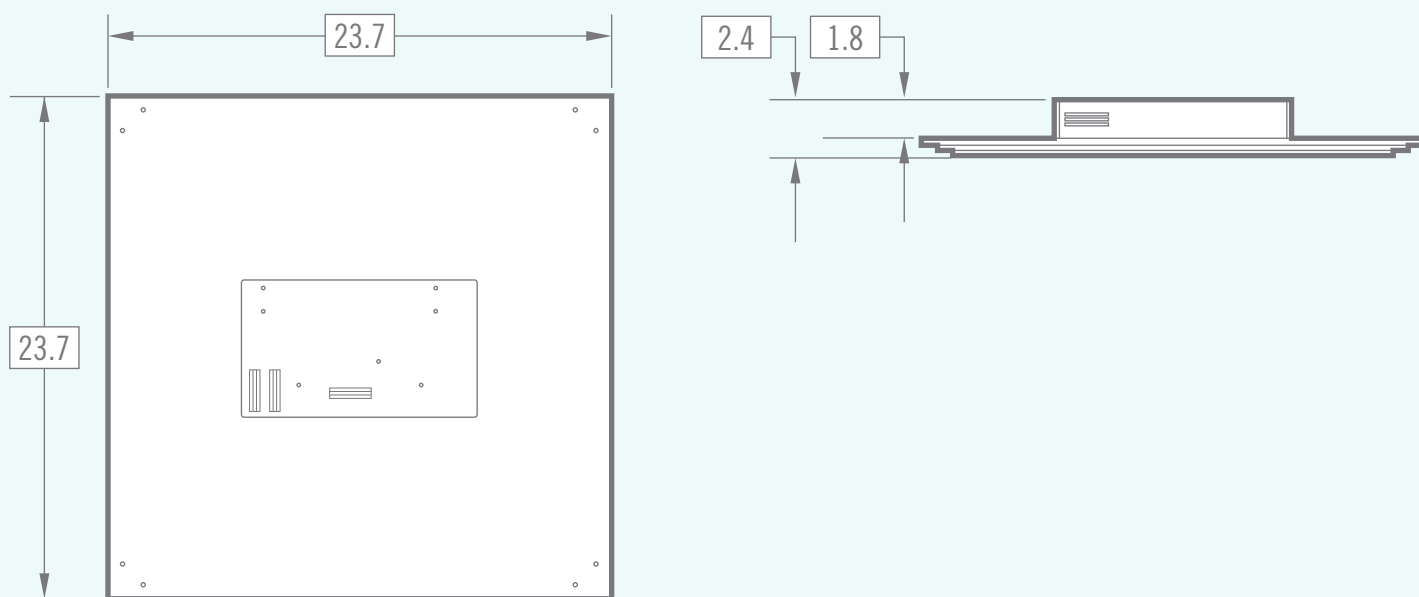

Certified to UL 1598  
CSA2323919

### GO Lighting Technologies Inc.

5050 Dufferin Street, Unit 115 / Toronto ON M3H 5T5 / Canada

Phone: 416-679-0259 / Phone (Toll-free): 866-571-7036 / Fax: 416-679-9452

E-mail: [info@goenergyeffective.com](mailto:info@goenergyeffective.com) / [www.goenergyeffective.com](http://www.goenergyeffective.com)



## GO LED Flat Panel

Dimmable / Networkable LED General Lighting Fixture

### Features

#### Quality

Compare GO's quality to any other manufacturer - from design and engineering to North American manufacturing and dedicated customer service, GO will stand out. And in side by side comparisons, GO products always deliver a noticeably better quality of light.

#### Natural Light

No flickering, no ballast noise, no EMI, UV or glare. Reduces eye strain, headaches and other workplace complaints associated with fluorescent lighting.

#### Dimmable

Can be dimmed to 5% brightness with standard 0-10V, IR remote control or automated sensor control. Components replaceable/upgradeable. Designed for field replaceable PCBs, power and control systems as technology becomes even more efficient. Retain the fixture, upgrade the technology.

#### Low Heat Generation

Low heat generation, extra saving through reduction of HVAC load.

#### Environment Friendly

No mercury, RoHS compliant, no disposal concern, highly robust – no glass to break and shatter.

#### Long Life

Reduces relamping cycle 2 to 5 times fewer than fluorescent systems – ROI <3 years typical.

#### Solid Construction

Robust 22 gauge, powder coated metal construction with polycarbonate lens, sealed to resist infiltration by dust or insects and specifically designed for extra-long life.

#### High Uniformity

+85% consistency of luminance across planar surface.

#### Intelligent Lighting

Compatible with building automation systems, 4 sensor inputs for autonomous intelligence, control up to 100 units with a single wall control.

#### Low Profile

Can be installed in shallow plenum space, mounts flush with ceiling.



All finished products  
will be shipped  
under **NAFTA**  
Certificate of Origin



Certified to UL 1598  
CSA2323919

#### GO Lighting Technologies Inc.

5050 Dufferin Street, Unit 115 / Toronto ON M3H 5T5 / Canada

Phone: 416-679-0259 / Phone (Toll-free): 866-571-7036 / Fax: 416-679-9452

E-mail: [info@goenergyeffective.com](mailto:info@goenergyeffective.com) / [www.goenergyeffective.com](http://www.goenergyeffective.com)