

GF S 06 T

Model name GFS06T (High illumination) (formerly R06T)
Size (mm) 600 x 600 x 19 (24" x 24" x 3/4")
Power Consumption 58W (44 lm/W)
Available CCT 6300K, 5000K, 4000K, 2700K +70CRI
Illumination values 2561 lm @ 6300K (custom CCT/CRI available)
Material Aluminum anodized, polycarbonate, RoHS
Voltage VAC 95~240, 50~60 Hz
Control method IR Remote controller
Installation Kit. IK-01, IK-02, IK-03, IK-05A, IK-06




Ver. 08.11


SP Certified to U_L 1598

www.goenergyeffective.com 416.679.0259
 © 2008 GO Lighting Technologies Inc.
 Custom light panel sizes and CCT available

Polar diagram

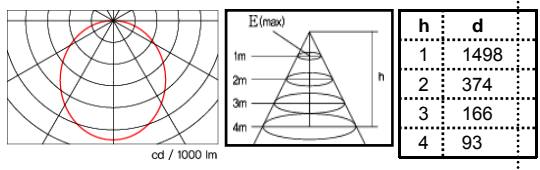

Dimensions

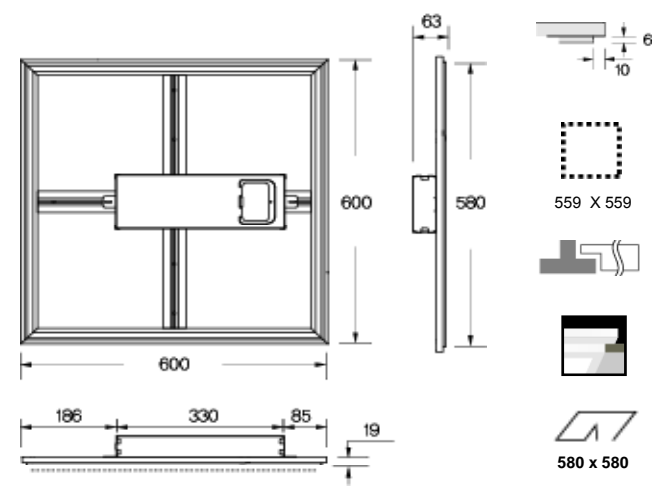

Description

