



ProLume™

ProFormance™ Electronic Fluorescent Ballast Specifications


EP332IS/120/SL

Ballast Type: Electronic Fluorescent
Starting Method: Instant Start
Lamp Connection: Parallel
Input Voltage: 120V
Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F32T8	3	120	32	0/-18	0.77	90	0.88	<10	0.99	0.98	3-1
F32T8	2	120	32	0/-18	0.54	65	1.00	<10	0.99	1.54	2-4
F28T8	3	120	28	0/-18	0.64	76	0.95	<10	0.99	1.25	3-1
F28T8	2	120	28	0/-18	0.51	58	1.10	<10	0.99	1.90	2-4
F25T8	3	120	25	0/-18	0.59	70	0.88	<10	0.99	1.26	3-1
F25T8	2	120	25	0/-18	0.40	48	1.00	<10	0.99	2.08	2-4
F17T8	3	120	17	0/-18	0.44	51	0.88	<10	0.99	1.73	3-1
F17T8	2	120	17	0/-18	0.30	36	1.00	<10	0.99	2.78	2-4
F40T8	2	120	40	0/-18	0.65	77	0.88	<10	0.99	1.14	2-4
PLL40/2G11	2	120	40	0/-18	0.59	70	0.88	<10	0.99	1.26	2-15


Also operates equivalent U-shaped lamps

WIRING DIAGRAMS

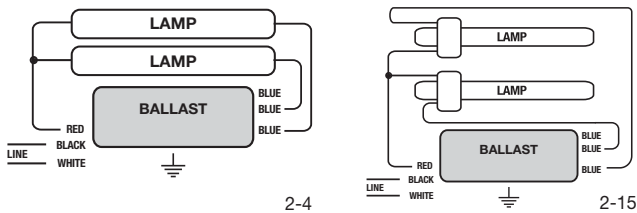


STANDARD LEAD LENGTHS

	in.	cm.
Black	25	63.50
White	25	63.50
Blue	31	78.74
Red	48	121.92



OCV: 600V

CASE DIAGRAM

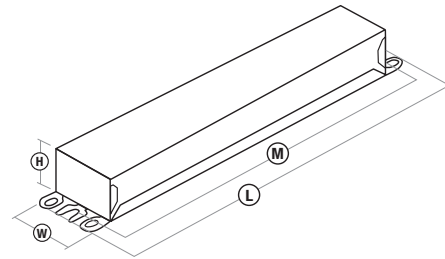

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
9.49"	1.70"	1.15"	8.82"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50120

