



ProLume™



ProFormance™ Electronic Fluorescent Ballast Specifications

EP259IS/MV

Ballast Type: Electronic Fluorescent
Starting Method: Instant Start
Lamp Connection: Parallel
Input Voltage: 120-277V
Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F96T8	2	120	59	0/-18	0.97	114	0.88	<10	0.99	0.77	2-4
		277			0.42				0.98		
F96T8	1	120	59	0/-18	0.58	70	0.88	<10	0.98	1.26	1-12
		277			0.26						


WIRING DIAGRAMS



STANDARD LEAD LENGTHS

	in.	cm.
Black	24	60.96
White	24	60.96
Blue	48	121.92
Red	72	182.88

CASE DIAGRAM

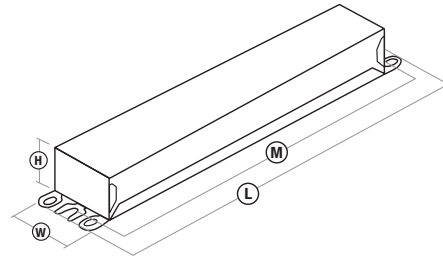

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
9.49"	1.80"	1.30"	8.82"

OCV: 900V

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50136

