


HALO®





H27T

6" Aperture  
Non-IC Housing  
Shallow Ceiling  
120V Line Voltage

#### RECESSED DOWNLIGHTING

- For use in shallow ceilings with 2 x 6 joist construction
- Thermally Protected Non-IC Housing
- For use with 120V Incandescent lamps

#### DIMENSIONS

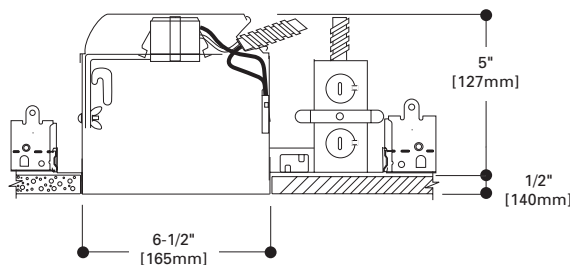

#### DESCRIPTION

The H27T housing is designed for use in shallow ceilings where 2" x 6" joist construction is used. The wide variety of trims available allows a number of different lighting effects to be created with one basic housing. The H27T is designed for non-insulated shallow ceilings. If ceiling insulation is present, it must be kept 3" from the fixtures on all sides.

##### Housing

Formed 20 gauge CRS with white powder coat finish.

##### Socket Plate

Rigid socket plate adjusts and locks without tools for various lamp sizes. Socket plate and bracket may be removed when using socket supporting trims.

##### Plaster Frame

Housing adjusts in plaster frame 1 3/8" to accommodate different ceiling thicknesses. Includes locking screws for hanger bars and cutouts for crimping hanger bars in position

##### Slide-N-Side™ Junction Box

- UL Listed for through branch circuit wiring (maximum 8 No. 12 ga., 90°C conductors).

- Seven 1/2" trade size conduit knockouts.
- Slide-N-Side™ wire traps allow non-metallic sheathed cable to be installed without tools and without removing knockouts. Accepts a wide range of non-metallic sheathed cable.
- Allows wiring connections to be made outside the junction box
- Simply insert the cable directly into the trap after connections are made.
- Accommodates the following standard non-metallic sheathed cable sizes:  
(US) #14/2, #14/3, #12/2, #12/3  
(Canada) #14/2, #14/3, #12/2

##### GOT NAIL! Pass-N-Thru™ Bar Hangers.

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams.
- Score lines allow "toolless" shortening for 12" joists.
- Bar hangers can be repositioned 90° on plaster frame
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold

the housing in place with one hand while driving nails.

- Housing can be positioned at any point within 24" joist span
- Pass-N-Thru™ feature allows bar hangers to be shortened without removing from plaster frame.
- Integral T-bar clip snaps onto T-bars - no additional clips required.

##### F...Socket

Porcelain socket with nickel plated brass screw shell. Shipping insert protects socket from overspray.

##### G...Thermal Protector

Integral Thermal Protector deactivates fixture if an incorrect lamp is used or if ceiling insulation material is not applied correctly.

##### Labels


- UL/cUL. listed for Damp Location
- UL/cUL. listed for Feed Through

426  
Reflector Cone

- Accepts a wide variety of lamps
- \* Coil spring retention
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- Lamps:

H27T	75W PAR30, 75W PAR30L, 85W BR30, 100W R30
H27RT	65W BR30, 75W R30, 75W PAR30, 75W PAR30L

Height:  
2-5/8" [67mm]  
OD:  
7-1/4" [184mm]



426CG  
White Trim Ring with Champagne Gold Reflector Cone

426RG  
White Trim Ring with Residential Gold Reflector Cone


426  
White Trim Ring with Clear Specular Reflector Cone



426SN  
Satin Nickel Trim Ring with Satin Nickel Reflector Cone

426H  
White Trim Ring with Haze Reflector Cone

426MB  
White Trim Ring with Specular Black Reflector Cone

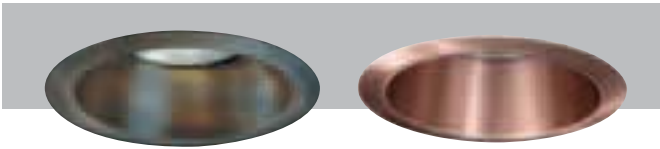

426TBZ  
Tuscan Bronze Trim with Tuscan Bronze Reflector Cone


426AC  
Antique Copper Trim with Antique Copper Reflector Cone

4261  
Self Flanged White Reflector Cone

- Features:
- Accepts R and PAR lamps
  - Coil Spring retention
  - Lamps:

H27T	100W R30, 75W PAR30, 75W PAR30L, 85W BR30
H27RT	75W R30, 75W PAR30, 75W PAR30L, 65W BR30

Height:  
2-5/8" [67mm]  
OD:  
7-1/4" [184mm]




4261P  
White Self Flanged Reflector Cone

310  
Coilex™ Baffle

- Black or White Phenolic Baffle with Separate Trim Ring
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- \* Coil Spring retention
- Lamps:

H27T H27RT	65W BR30, 75W R30, 75W PAR30, 75W PAR30L
---------------	--

Height:  
5" [127mm]  
OD:  
7-1/4" [184mm]



310SN  
Satin Nickel Trim with Black Baffle

310W  
White Trim with White Baffle

310P  
White Trim with Black Baffle



310TBZ  
Tuscan Bronze with Black Baffle

310AC  
Antique Copper with Black Baffle

**H27T**
**H27RT**
**312**
**Coilex™ Baffle**


- 312 baffle features smaller lamp opening to conceal interior view of housing when used with PAR lamps
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring

\* Coil Spring retention

- Lamps

<b>H27T</b>	85W BR30, 75W PAR30
<b>H27RT</b>	75W PAR30, 75W PAR30L, 85W BR30

Height:  
5" [127mm]  
OD:  
7-1/4" [184mm]



**312W**  
White Trim with White Baffle


**312P**  
White Trim with Black Baffle

**353**
**Metal Baffle**

- Metallic Finish Trim Rings and Baffles
- Coil Spring retention
- Lamps:

<b>H27T</b>	65W BR30, 75W R30,
<b>H27RT</b>	75W PAR30, 75W PAR30L

Height:  
5" [127mm]  
OD:  
7-1/4" [184mm]



**353TBZ**  
Tuscan Bronze Trim with  
Tuscan Bronze Baffle

**353AC**  
Antique Copper Trim with  
Antique Copper Baffle


**353SN**  
Satin Nickel Trim with Satin  
Nickel Baffle

**74 - Eyeball - 30° Tilt**

- Provides optimum position for PAR30 lamps
- Torsion Spring retention
- Lamps:

<b>H27T</b>	75W PAR30
<b>H27RT</b>	

Aperture:  
3-7/8" [98mm]  
OD:  
8" [203mm]




**74P**  
White Trim and Eyeball

**77**
**Adjustable Eyeball - 30° Tilt**

- For use with R20 and PAR20 lamps
- Torsion spring retention
- Lamps:

<b>H27T</b>	50W R20, 50W PAR20
<b>H27RT</b>	

Aperture:  
2-3/4" [70mm]  
OD:  
8" [203mm]



**77P**  
White Trim with White Eyeball

H27T

H27RT

78  
Eyeball - 30° Tilt

- Wide Choice of finishes for any decor
- 30° Tilt, 360° rotation
- Lamps:

H27T H27RT	65W BR30, 75W R30, 75W PAR30, 75W PAR30L
---------------	--

Aperture:  
3-15/16" [100mm]  
OD:  
8" [203mm]

\* When using an Air-Tite trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATTRIM-6PK



78B  
Satin Brass Trim with Satin Brass Eyeball

78PAT\*  
White Trim with White Eyeball - AIR-TITE trim


78P  
White Trim with White Eyeball



78SN  
Satin Nickel Trim with Satin Nickel Eyeball

78SL  
Silver Trim with Silver Eyeball

78PB  
Polished Brass Trim with Polished Brass Eyeball

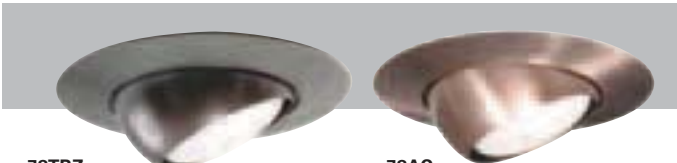

78TBZ  
Tuscan Bronze Trim with Tuscan Bronze Eyeball

78AC  
Antique Copper Trim with Antique Copper Eyeball

90  
Double Bubble Adjustable - 60° Tilt

- Provides up to 60° of tilt
- Lamps:

H27T	250W PAR38
------	------------

OD:  
8" [203mm]



90P  
White Trim and Eyeball

376  
Adjustable

- Regressed Gimbal with Baffle
- Torsion spring retention
- Lamps:

H27T H27RT	75W PAR30
---------------	-----------

OD:  
7-1/4" [184mm]



376P  
White Trim Ring, Black Baffle

378 - Adjustable with Splay

- Regressed Gimbal with Splay Trim
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- Friction clip on trim
- Lamps:

H27T H27RT	75W PAR30
---------------	-----------

OD:  
8" [203mm]



378P  
White Trim Ring with White Splay Trim


378  
White Trim Ring with Clear Specular Splay Trim

**H27T****H27RT****419****Regressed Eyeball with Splay**


- 25° Tilt, 358° rotation
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- Lamps:

**H27T**  
**H27RT**

75W PAR30

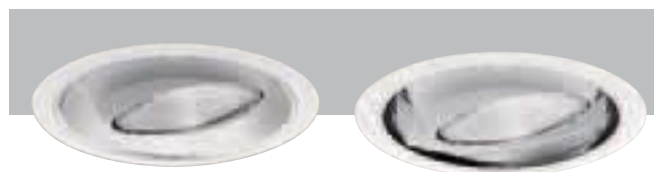OD:  
8" [203mm]**419P**White Trim and Eyeball with  
White Splay**419**White Trim and Eyeball with  
Clear Splay**420****Regressed Eyeball - 30° Tilt:**


- Regressed eyeball with baffle splay
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- Torsion spring retention
- Lamps:

**H27T**  
**H27RT**75W BR30, 75W  
PAR30L, 75W PAR30**420PB**Polished Brass Trim with  
Polished Brass Eyeball and Black  
Baffle**420W**White Trim with White Eyeball  
and White Baffle**420P**White Trim with White Eyeball  
and Black BaffleAperture:  
3-7/8" [98mm]  
OD:  
7-1/4" [176mm]**70- Albalite Lens**

- White Trim, Frosted Glass Albalite Lens
- PS version is wet location listed and AIR-TITE for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:

**H27T**


60W A19

OD:  
8" [203mm]**70PS**Wet Location and AIR-TITE listed  
White Trim with Frosted Albalite  
Lens\***70P**White Trim with Frosted  
Albalite Lens**170- Albalite Lens with Reflector**

- White Trim with Frosted Glass Albalite Lens
- PS version is wet location listed for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:

**H27RT**

60W A19


Height:  
4" [101mm]  
OD:  
8" [203mm]**170PS**Wet Location and AIR-TITE listed  
White Trim with Frosted Albalite  
Lens\***170P**White Trim with Frosted  
Albalite Lens

\* When using an Air-Tite trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK

71 - Drop Opal Lens

- White Trim, Drop Opal Lens
- PS version is wet location listed and AIR-TITE for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:


H27T	60W A19
------	---------



171- Drop Opal Lens with Reflector

- White Trim with Drop opal Lens
- PS version is wet location listed and AIR-TITE for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:


H27RT	60W A19
-------	---------



73- Fresnel Lens

- White Trim with Fresnel Lens
- PS version is wet location listed and AIR-TITE for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:


H27T	40W A19
------	---------



173 - Fresnel Lens with Reflector

- White Trim with Fresnel Lens
- PS version is wet location listed and AIR-TITE for use in showers with non conductive, non corrosive polymer trim
- Torsion spring retention
- Lamps:


H27RT	60W A19
-------	---------



75 Diffuser

- All glass diffuser
- Provides some illumination on the ceiling plane
- Lamps:

H27T	60W A19
------	---------



## H27T

## H27RT


### 172

#### Dome Shower Light

- Frosted Glass Dome
- Wet location listed for use in showers
- Non-conductive, non-corrosive Gasketed Polymer Trim
- Lamps:

<b>H27T</b>	75W PAR30, 100W A19
<b>H27RT</b>	

Height:  
2" [50mm]  
OD:  
7-3/4" [197mm]



**172ACS**  
Wet Location Listed Antique Copper Trim with frosted Glass Dome

**172SNS**  
Wet Location Listed Satin Nickel Trim with frosted Glass Dome

**172PS**  
Wet Location Listed White Trim with frosted Glass Dome



**172TBZS**  
Wet Location Listed Tuscan Bronze Trim with frosted Glass Dome

### 301


#### Open Trim with Socket Support

##### Features:

- Open trim for BR and PAR Lamps
- Lamps:

<b>H27T</b>	65W BR30, 75W R30, 75W PAR30, 75W PAR30L
<b>H27RT</b>	

Aperture:  
3-7/8" [98mm]  
OD:  
7-1/4" [184mm]



**300AC**  
Antique Copper Trim

**300SN**  
Satin Nickel Trim

**300P**  
White Trim



**301PB**  
Polished Brass Trim

**300TBZ**  
Tuscan Bronze Trim


### 328 - White Splay trim

#### Features: Open splay trim with some lamp regression

- Lamps:

<b>H27T</b>	75W PAR30, 75W PAR30L, 85W BR30, 100W R30
<b>H27RT</b>	

Height:  
4-1/2" [114mm]  
OD:  
7-3/4" [197mm]



**328P**  
White Splay Trim

### 79


#### Pinhole Trim

##### Features:

- 1-7/8" open pinhole
- Lamps:

<b>H27T</b>	75W PAR30
<b>H27RT</b>	50W PAR30

OD:  
8" [203mm]



**79P**  
White Trim