




**HI-LITE MFG.  
CO., INC.**

13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Toll Free: (800) 465-0211  
Fax: (909) 465-0907  
www.hilitemfg.com

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_

**Fixture may be  
Wall, Flush or  
Column mounted.**

**Vapor Jar Collection**

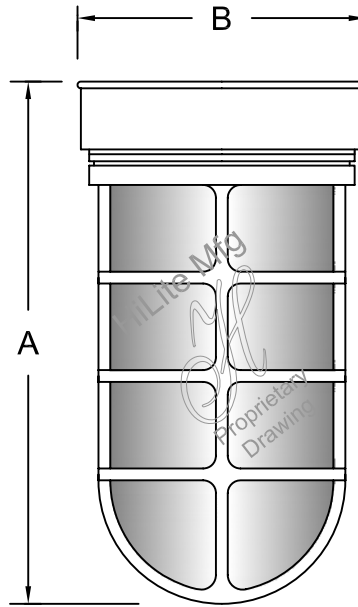

Item Number	Height/Projection (A)	Width (B)
H-MNCGU-FB	9"	4 1/2"
H-CGU-FB	10"	4 1/2"
H-LCGU-FB	11"	6"

Fixture No.	Fixture Color	Glass Color	Guard	Guard Color	Wattage/Lamp options	Ballast	Voltage
H-MNCGU-FB <sup>(1)</sup> H-CGU-FB <sup>(1)</sup> H-LCGU-FB <sup>(1)</sup>	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20.  Upgraded Finishes. <sup>(2)</sup> 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.  For finish specs see pages 344-348.	CLR (Clear)  RIB (Clear Ribbed) (Not available with MNCGU)  FR (Frost)  RD (Red)  BL (Blue)  GRN (Green)  AM (Amber)  AMC (Amber Crackle)	GD-1 GD-2 GD-3 GD-4 GD-5 GD-6 GD-7 GD-8 GD-9 GD-10	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)  For all finishes see pages 344-348.	Incandescent <sup>(1) (5)</sup> (Fixture is standard 100W or 200W. Do not specify.)  CFL <sup>(5)</sup> (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL  DMB (Dimmable Ballast for CFL. Add to Part No.)  HID (High Intensity Discharge)  MH <sup>(5)</sup> (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH  HPS <sup>(5)</sup> (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC.  RB <sup>(3)</sup> (Remote)  BCM (Canopy Mount)  OBB <sup>(4)</sup> (Onboard)  OBB <sup>(4)</sup> (Fluorescent Options 13W-32W) Specify 120V or 277V  For specs see pages 341-343.	(Fixture is standard 120V. Do not specify.)  CFL M (Multi 120/277V)  HID RB and BCM M (Multi 120/208/240/277V)

H-CGU-FB	91	CLR	GD-1	91	13/CFL	BCM	M
----------	----	-----	------	----	--------	-----	---

**ORDER EXAMPLE**

(USE THIS FORMAT TO PLACE ORDER)


**Notes:**

- (1) H-MNCGU-FB available for 100W Max INC, 26W Max CFL and 100W Max HID.  
H-CGU-FB available for 100W Max INC, 32W Max CFL and 100W Max HID.  
H-LCGU-FB available for 200W Max INC, 42W Max CFL and 175W Max HID.
- (2) Casting will be painted to match for copper and brass finishes.
- (3) (RB) Remote ballast not available for Fluorescent Lamping.
- (4) (OBB) Onboard Ballast will add 2" to the projection.
- (5) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Suitable for wet location.

**GD-1**

For use with Wall, Flush or Column Mount.



(No Shield)

**GD-2**

For use with Wall, Flush or Column Mount.



(No Shield)

**GD-3**


For use with Wall, Flush or Column Mount.



(Bottom Quarter Shield)

**GD-4**


For use with Wall, Flush or Column Mount.



(Bottom Quarter Shield)

**GD-5**


For use with Wall Mount only.



(180° Half Shield)

**GD-6**


For use with Wall Mount only.



(180° Half Shield)

**GD-7**


For use with Wall, Flush or Column Mount.



(Top Three Quarter Shield)  
360° Perforated Shield)

**GD-8**


For use with Wall, Flush or Column Mount.



(Top Three Quarter Shield)  
360° Perforated Shield)

**GD-9**


For use with Wall Mount only.



(Bottom Quarter and 180° Half Shield)

**GD-10**

For use with Wall Mount only.



(Bottom Quarter and 180° Half Shield)