

# TH135-01

Hydronic floor heating  
Central heating

This easy-to-use electronic thermostat saves three temperature settings and features pump protection



NON-PROGRAMMABLE

## MODEL & RATINGS

TH135-01      2 A (inductive) @ 24 V      R, W  
Millivolt compatible

## SPECIFICATIONS

### TEMPERATURE CONTROL

#### Proportional adaptive

Cycles: selectable 15 or 20 minutes

#### Conventional with anticipation

Accuracy:  $\pm 0.5^{\circ}\text{C}$  /  $0.9^{\circ}\text{F}$

### TEMPERATURE SETTING

Manual

$^{\circ}\text{C}$  or  $^{\circ}\text{F}$  selectable

Heating setting range:  $5^{\circ}\text{C}$  to  $30^{\circ}\text{C}$  ( $40^{\circ}\text{F}$  to  $85^{\circ}\text{F}$ )

### POWER SUPPLY

2 AA batteries

### DIMENSIONS (H•W•D)

79 x 79 x 22 mm / 3.1 x 3.1 x 0.8 inches

## FEATURES

**Selectable temperature control** – gives thermostat flexibility to control a range of heating applications

**Comfort, economy and vacation presets** enable temperature changes at the touch of a button

**Pump protection** activates pump for one minute every 24 hours to prevent seizure

**Compact design** – one of the smallest thermostats on the market

**Precise LCD** shows room temperature in increments of  $0.1^{\circ}\text{C}$  or  $0.1^{\circ}\text{F}$

**Low battery indicator** – gives 60-day warning to replace batteries

**Remote input** enables change of temperature modes by phone (telephone controller required)

**Compatible with electric heat applications using a relay** (see accessories)

## ACCESSORIES


Aube AC130-12 wall plate

Aube CT240 telephone controller

Aube RC840 electromechanical relay

Aube RC840T Series electromechanical relay

## INSTALLATION

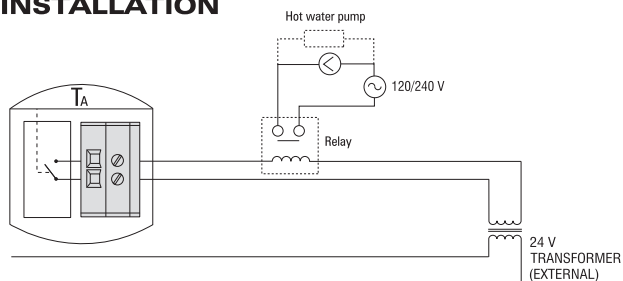

3 year warranty