

VAPORTITE® NV2 SERIES ENCLOSED/GASKETED

Cat. #		Approvals
Job	Type	



APPLICATIONS

- Typical applications include manufacturing plants, chemical and petrochemical processing facilities, sewage treatment plants, off-shore and dockside installations, agricultural, commercial, industrial, mining, and marine facilities.


SPECIFICATIONS

- NV2 Series non-metallic light fixtures combine an outstanding balance of strength, stiffness, toughness and electrical properties.
- Energy and labor saving fluorescent or incandescent models.
- Accessories include polycarbonate dome reflectors and wall extension.
- Molded from 30% glass-filled thermoset polyester for high strength.
- Resists corrosive effects of most chemicals, hydrocarbons and solvents.
- Designed for indoor and outdoor applications.

LISTINGS

- UL1598 Standard for luminaires.
- UL 1598 Marine type luminaires.
- UL 844 Standard for lighting fixtures for hazardous locations.
- CSA C22.2 no. 137-M1981 electric luminaires for use in hazardous locations.
- Enclosed and gasketed.
- NEMA 3, 4X IP66.

Class I, Div. 2, Groups A, B, C, D
Class I, Zone 2, Groups IIC, IIB, IIA
Class II, Div. 2, Groups F, G, C, D
Class III • NEMA 4X, IP66, Marine Rated

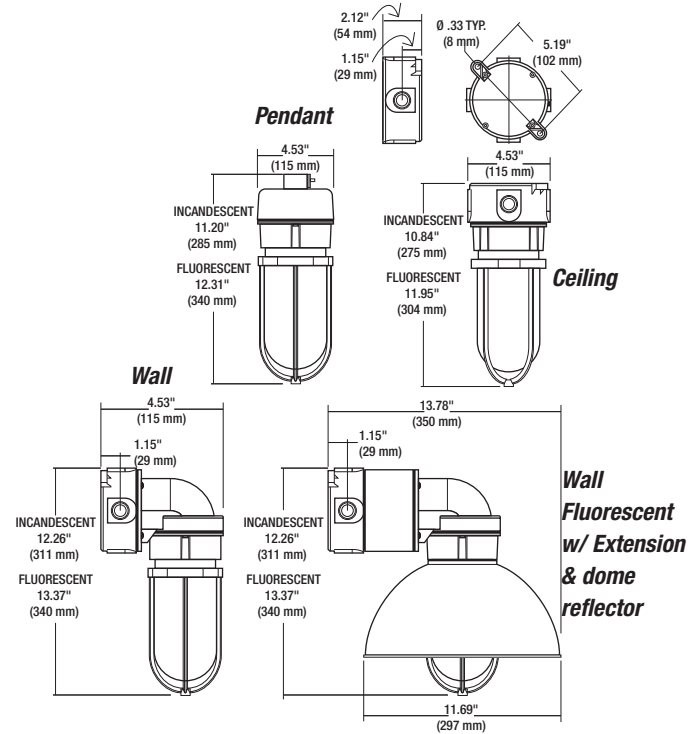

ORDERING INFORMATION

Catalog Number		Type
Standard Globe	Tempered Globe	
PENDANT 3/4" FIXTURE WITH CLEAR GLOBE & GUARD		
NV2IG15ASG	NV2IG15AHG	150W Incandescent
NV2FG13ASG	NV2FG13AHG	13W Fluorescent
NV2FG18ASG	NV2FG18AHG	18W Fluorescent
NV2FG26ASG	NV2FG26AHG	26W Fluorescent
NV2FG32ASG	NV2FG32AHG	32W Fluorescent
NV2FG42ASG	NV2FG42AHG	42W Fluorescent
CEILING 3/4" FIXTURE WITH CLEAR GLOBE & GUARD		
NV2IG15XSG	NV2IG15XHG	150W Incandescent
NV2FG13XSG	NV2FG13XHG	13W Fluorescent
NV2FG18XSG	NV2FG18XHG	18W Fluorescent
NV2FG26XSG	NV2FG26XHG	26W Fluorescent
NV2FG32XSG	NV2FG32XHG	32W Fluorescent
NV2FG42XSG	NV2FG42XHG	42W Fluorescent
WALL 3/4" FIXTURE WITH CLEAR GLOBE & GUARD		
NV2IG15BSG	NV2IG15BHG	150W Incandescent
NV2FG13BSG	NV2FG13BHG	13W Fluorescent
NV2FG18BSG	NV2FG18BHG	18W Fluorescent
NV2FG26BSG	NV2FG26BHG	26W Fluorescent
NV2FG32BSG	NV2FG32BHG	32W Fluorescent
NV2FG42BSG	NV2FG42BHG	42W Fluorescent

- Notes
- Tempered Globes are required for Wet Location applications.
 - All assemblies are unit packed with required components (not assembled).
 - Fluorescent unit pack models (only) include the lamp.
 - Reflector is sold separately. For wall mounting with reflector, the NVEXTG extension is required and sold separately.
 - Fluorescent models use "world voltage" ballasts for 120VAC through 277VAC 50/60Hz applications.

COMPONENTS¹

Catalog Number	Description
NV2AG	3/4" Pendant Splice Box
NV2XG	3/4" Ceiling Splice Box (M20 entry/NV2MG)
NV2BG	Elbow (used between NV2Xg & fixture body)
NV2GG	Guard
NV2IG15	Incandescent Body with socket
NV2FG13	13W Fluor. Body 120VAC - 277V 50/60Hz
NV2FG18	18W Fluor. Body 120VAC - 277V 50/60Hz
NV2FG26	26W Fluor. Body 120VAC - 277V 50/60Hz
NV2FG32	32W Fluor. Body 120VAC - 277V 50/60Hz
NV2FG42	42W Fluor. Body 120VAC - 277V 50/60Hz
NVPSD12	White Reflector (secured by guard)
NVEXTG	Extension (for wall mount with reflector)
NV2CG	Gray Blank Cover for NV2XG
NV2CC	Clear Cover for NV2XG

¹ Fluorescent "bodies only" do not include lamps.

COLORED GLOBE OPTIONS²

Example: NV2IG15ASG-R for Ruby Standard Globe
or NV2IG15AHG-R for Ruby Tempered Globe

Suffix Standard Globe	Suffix Tempered Globe	Description
A	A	Amber
B	B	Blue
R	R	Ruby
G	N/A	Green
P	N/A	Purple
BG	BG	Blue-Green

² Tempered Globes are required for Wet Location applications.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Industrial Lighting

Hubbell Industrial Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1262

For more information visit our web site: www.hubbell-ltg.com