

VGG/VWGG Series

Wet Location Vaportites

WALL/SURFACE



- Wall/Ceiling/Pendant entry, corridor, tunnel, service area, stairwell, or retro-accent.
- 150 watt/300 watt maximum medium base incandescent.
- Platinum silver protective finish.
- VWGG has cast aluminum wall bracket with cast wiring box. Box has external lugs and four side 1/2" hubs for surface conduit and one rear 1/2" access hub.
- VGG has cast aluminum wiring box with external lugs for ceiling mount and four 1/2" hubs for surface conduit.

Wiring box has top 1/2" hub for pendant mount.

- All units have water/bug tight gasketing.
- All units have medium base porcelain socket.
- All units include clear glass protective globe with thread-on cast aluminum guard. Guard includes vandal-resistant set screw.
- All units are UL listed for use in wet locations.

ORDERING INFORMATION

Catalog Number	Wattage	Mounting	Weight lbs. (kg)
VGG-150	150	Box/Pendant	3 (1.36)
VWGG-150	150	Wall	3.5 (1.59)
VGG-300	300	Box/Pendant	4 (1.81)
VWGG-300	300	Wall	4.5 (2.04)


REPLACEMENT GLOBES

Catalog Number	Description
VG-15	150 watt
VG-30	300 watt




300 Watt

150 Watt
Lugs: 5" center to center

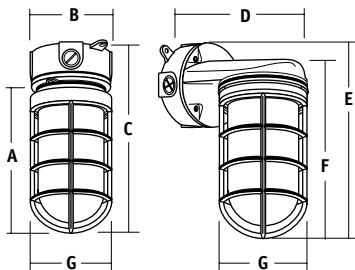

300 Watt
Lugs: 5" center to center

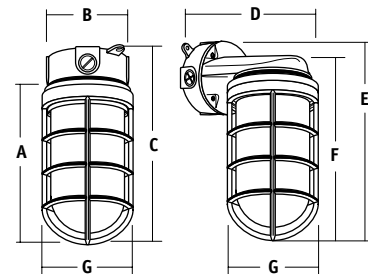

	A	B	C	D	E	F	G
150W	7"	1 1/2"	9"	7 1/4"	9 3/4"	8 1/2"	4"
	178 mm	38 mm	229 mm	184 mm	248 mm	216 mm	102 mm
300W	9"	4 1/2"	11"	8"	11"	9"	5 1/2"
	229 mm	114 mm	279 mm	203 mm	279 mm	229 mm	140 mm



Outdoor Lighting