

IFS90S

Step Light

11" Stainless Steel Die-Cast Step Light

Catalog #:	Type:
Notes:	

Product Specifications

Description:

Compact fluorescent die-cast housing step light with 316 stainless steel louver. For use in concrete or block wall construction. Provides safe illumination in a low profile recessed fixture. Suitable for outdoor applications. Wall mount only. Two 1/2" knockouts provided for power feed. NRTL wet location listed.

Features:

- Thermal protection integral to ballast
- Integral brackets for installation hardware
- Heavy duty, low profile aesthetic louver trim included

Lamp:

(1) 13\18\26W DTT 4 PIN lamp

Louver Trim:

Trim constructed from heavy duty stainless steel. Choice of five louvers: Vertical Grill, Albalite Face, Opal Face, Horizontal Grill, and Long Vertical Grill.

Housing:

Aluminum die-casting containing less than .3% copper to prevent corrosion applications. Two 1/2" knockouts provided for power feed. Captive black oxide stainless steel fasteners, single piece molded silicone gasket, and an socket for appropriate lamps. NRTL wet location listed



Mounting:

For wall recessed mounting only. Front bracket plates allow for fixture to be secured to joists. Integral brackets provided for optional installation hardware. Insulation must be kept at least 3" away from all surfaces of lighting fixture.

Listing:

- NRTL wet location listed


Dimensions

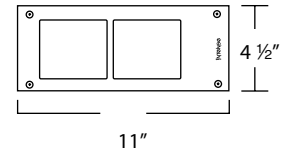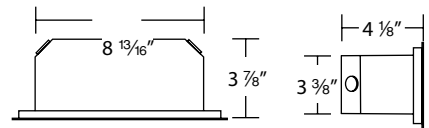


-G: Vertical Grill




-OP: Opal Face



-LG: Long Vertical Grill



-HG: Horizontal Grill



-AB: Albalite Face

Ordering Matrix

IFS90S

Series	Lamp	Ballast	Voltage	Face Plate
	13 13W DTT 4 pin 18 18W DTT 4 pin 26 26W DTT 4 pin	E electronic	Blank 120V -27 277V	-G vertical grill -LG long vertical grill -HG horizontal grill -OP opal face -AB albalite face

*Note: Specifications and dimensions subject to change without notice.

