



SLEEK PLUS

Mini-Fluorescent
Lighting Solutions

JESCO
LIGHTING GROUP



Sleek Plus Offers

- The thinnest profile available today.
- Superb engineering using extruded aluminum housings to assure proper heat control and lamp life, efficiency, and maintenance of color output.
- Patent pending aiming feature available that maintains the sleek design.
- Carefully designed diffusion lens for coves and shelving.
- Carefully designed lamp shielding for corner lighting unit that also acts as a reflector for increased efficiency.
- Standard color lamps and special order UV lamps available.
- Plug-in connectors simplifying installation, reducing costs.
- Single T4 or T5 and twin T5 fixtures in a wide variety of wattages, lengths, lumen outputs, and color temperatures.
- T4 and T5 lamp CRI > 82 for higher color rendition compared to T8 and T12 CRI > 70.





COVE LIGHTING

Sleek Plus is an ideal solution for soft and even cove lighting, creating a beautiful glow of light, highlighting the architectural quality of a space. With a variety of design features, Sleek Plus is a simpler and less expensive install, and sized to more easily fit into the most restricted spaces without a problem.

DISPLAY LIGHTING

Sleek Plus offers the interior and display designer a variety of lighting solutions, including a new adjustable shelf lighting unit that provides the so often needed ability to adjust aiming and shielding angles - assuring key items have the highest light levels as located on a shelf.



CABINET LIGHTING

Cabinets and under-cabinets are a beautiful display setting in the store, the restaurant, the office, or in the home. They are also among the most difficult lighting applications for the designer due to constraints of installation space - constraints Sleek Plus reduces to the greatest degree possible.



Table of Contents

SLEEK PLUS

T4-2-Wire Non-Grounded	6
T5-2-Wire Non-Grounded	7
Adjustable T4-3-Wire Grounded	8
T4-3-Wire Grounded	9
Adjustable T5-3-Wire Grounded	10
T5-3-Wire Grounded	11
Adjustable High Output T5-3-Wire Grounded	12
High Output T5-3-Wire Grounded	13
Adjustable 24V Low Voltage T5-3-Wire Grounded	14
24V Low Voltage T5-3-Wire Grounded	15
Corner Light T5-3-Wire Grounded	16
Twin Adjustable T5-3-Wire Grounded	17
Twin Adjustable High Output T5-3-Wire Grounded	18

ACCESSORIES & COMPONENTS	19
Replacement T4 Fluorescent Lamps	20
Replacement T5 Fluorescent Lamps	21
Replacement T5 High Output Fluorescent Lamps	22

INDEX	24
-------	----



Lighting solutions for **residential** spaces providing comfort and a sophisticated quality of feeling.



Lighting solutions for **retail** stores needing products accented effectively with lighting.



Lighting solutions for **hospitality**, providing soft, atmospheric lighting for customer comfort and enjoyment.

Sleek Plus is an award winning, patented group of linear fluorescent fixtures that have been specially designed for installation in coves, cabinets, and shelving. The significant features of the Sleek Plus product line basically amount to four:

- Better optics and patented adjustability – **increasing lighting performance.**
- Simpler installation including special straight and angled plug-in wiring inter-connectors – **lowering installation costs.**
- Better operating features including electronic ballasting and heat reducing material construction to maintain lamp and ballast life – **lowering maintenance costs.**
- More features and more quality offered than other product types on the market using advanced manufacturing technology – selling everyday at affordable pricing – **saving owners on the purchasing costs.**

LINES OF LIGHT

Sleek Plus/Grounded The Perfected T4/T5 Linkable Fluorescent System

Compare these features with any similar product available on the market today:

Commercial Specification Grade Design

To achieve optimum performance there are several essential qualifiers that need to be considered: The need for the reduction of radiated emission noise, the control of heat to assure full lamp life and proper color output, coverage of safety issues that protect the sockets and wiring, and making easy the plug-in interconnection of fixtures. With these key design elements there is also a need to provide a variety of fixture lengths, lamp wattages, and color temperatures.

The Unique Fixture Design Controls Heat and Provides Clean and Even Light Output

Sleek Plus/Grounded fixtures are manufactured using heavy gauge extruded aluminum, creating great looks and outstanding heat control. These are the thinnest linkable fixtures on the market today. While all linkable fixtures provide some dark areas between interconnected fixtures, the Sleek Plus/Grounded tight-fit joiner and slim end-cap (only 1/2") create the best overlap of lamp output available, assuring only the least noticeable area of darkness produced by any similar fixture type. The special end-cap is built with a positive lamp lock for safety. Protecting the lamp is a carefully designed ribbed acrylic lens that distributes light

output with the highest efficiency and quality of beam control on the market today.

Reliable Ballasts

To achieve the best possible performance of ballasts is a challenge that is not easily achieved. One reason is that high quality electronic ballasts are critical for optimal performance, but are especially difficult to design in a 3/4"x3/4" housing. A simple matter of heat is the problem – requiring a complex set of design solutions. To guarantee the best in fixture performance, Jesco has fifty fixtures installed in a testing facility, operating 24 hours a day, 7 days a week, for over 7 years – *without* a single failure. Sleek Plus/Grounded fixtures use ballasts exceeding the UL standard and the FCC Part 18 Subpart C limits for radiation and conduction emissions. Jesco's soft-start function design maximizes lamp life and allows Jesco to offer as standard a 3-year warranty.

Sleek Plus Features UL Listed Connectors and Cables

The simple fact is that the UL testing for cables and connectors are expensive. Most manufacturers just use unlisted components. Jesco has done the necessary testing others don't to be sure of the installation safety of Sleek Plus/Grounded products. Jesco offers all of this as well as being the only manufacturer to offer as a standard product, a UL listed metal outlet box suitable for commercial hardwire applications.

Feature Comparison: Sleek Plus vs. Other Products

T4/T5 Linkable Fluorescent Lighting	Sleek Plus	Other Products	Sleek Plus Offers the Users
Branch Circuit	All code approved lighting circuits including 15A and 20A	15A and 20A	Wiring according to lighting circuit load ratings. Not limited to any size circuit.
Grounding	3 wire Hot, Neutral & Ground	2 wire Hot and Neutral	Grounded fixtures required for commercial applications.
Direct Connect Dark Area	Fixtures butt together reducing dark area to $\leq 1"$	About 1.5"	Reduced shadowing when fixtures are connected directly together
Fixture Lengths	(8) T4 and (6) T5 Sizes	(3) T4 and (4) T5 Sizes	More choices for more applications
Shortest Fixture	9-3/8" T4 or T5	10" T4	Fitting into smaller spaces
Longest Fixture	5' T5	5' T5	Use of commercial T5 5' Lamp
T4-Lamp Color Temperature	3000K, 4100K, 6400K, Red, Blue, Green and Black	3450K & 4100K	Use for any type of lighting application
T5-Lamp Color Temperature	3000K, 3500K, 4100K, 5000K, 6400K	3000K & 4100K	More lamp types available for use on any type of lighting application
Lamp CRI	> 82	Varies	Use of Tri-Phosphor
Lamp Life (hrs)	T4 –16,000; T5–20,000	10,000	Longer lamp life
Fixture Size	T4 – 3/4"W x 1-1/4" H T5 – 3/4"W x 1-1/2" H	T4–11/16"W x 1-3/8"H T5–29/32"W x 1-7/16"H	A smaller footprint, that fits into more applications
Switch Option	Optional rocker switch on side of fixture	Rocker switch plugs on end adds ~2"	Rocker switch that does not increase size of installed fixture
Power and Connector Cables	Separate UL listing	N/A	All components having separate UL listings
Right Angle Connectors	Yes	Flexible type	Minimized space required to fit angled space
Mounting Clips	Stainless steel spring clip	Plastic	Clips that will not break when the fixture needs to be taken down
Lamps Supplied	Yes	Sold separately	Fixtures shipped lamped, making less work on installation
Lens Cover	Standard acrylic ribbed lens	Optional clear lens	An acrylic lens that will not yellow and diffuses lamp image
Construction	T4–Aluminum T5–Aluminum	T4–Plastic T5–Aluminum	Aluminum that provides better heat dissipation, longer fixture & lamp life
Metal Hardwire Box	UL Listed Commercial 1 circuit outlet box	Not available	A metal wiring box for commercial applications
Hardwire Box with Switch	Plastic Hardwire Box with Switch	Plastic Hardwire Box with Switch	Needed for use in residential applications
Ballast Type	Electronic	Varies by manufacturer	Electronic filtered, quiet & flicker free
Ballast Warranty	3 years	1 year	Commercial grade fluorescent ballast
FCC Part 18	Yes	Unknown	Tested for inline and radiated interference
New York City Approval	Yes	Varies by manufacturer	NYC requirement

SLEEK PLUS ■ T4 – 2-WIRE NON-GROUNDED

Features:

- Sleek Plus T4 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 16,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 2-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

**The 6W fixture is not available with a Rocker Switch. A cord and plug with switch (SP-PCSW) may be ordered separately. See page 19

Lamp Options

30	3000K	BK	Black
41	4100K	BU	Blue
64	6400K	GN	Green
		RD	Red



Model	Dimensions	Max Watt	Lumens*	Finish
SP4-6**	9-3/8"L x 3/4"W x 1-1/4"H	6W	480	W-White
SP4-8	13-1/2"L x 3/4"W x 1-1/4"H	8W	600	W-White
SP4-12	17-1/2"L x 3/4"W x 1-1/4"H	12W	800	W-White
SP4-16	19-1/2"L x 3/4"W x 1-1/4"H	16W	1000	W-White
SP4-20	21"L x 3/4"W x 1-1/4"H	20W	1350	W-White
SP4-24	34-1/2"L x 3/4"W x 1-1/4"H	24W	2150	W-White
SP4-28	46-1/4"L x 3/4"W x 1-1/4"H	28W	2900	W-White

Ordering Instructions

Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: SP4-8SW/30-W

(with Rocker Switch)

SP4-8/30-W

(without Rocker Switch)

Features:

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 2-wire components on page 19.



Model	Dimensions	Max Watt	Lumens*	Finish
SP5-14	22-3/4"L x 3/4"W x 1-1/2"H	14W	1350	W-White
SP5-21	34-1/2"L x 3/4"W x 1-1/2"H	21W	2150	W-White
SP5-28	46-1/4"L x 3/4"W x 1-1/2"H	28W	2900	W-White

* The information on LUMENS is based on cool white lamps.

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

Ordering Instructions

Model	Lamp Option	–	Finish
-------	-------------	---	--------

Example: SP5-14/30-W

SLEEK PLUS ■ ADJUSTABLE T4 – 3-WIRE GROUNDED


Features:

- Sleek Plus Adjustable T4 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, anodized silver or white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 16,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

** The 6W fixture is not available with a Rocker Switch.

***SG4-22 only offered with 4100K lamp.

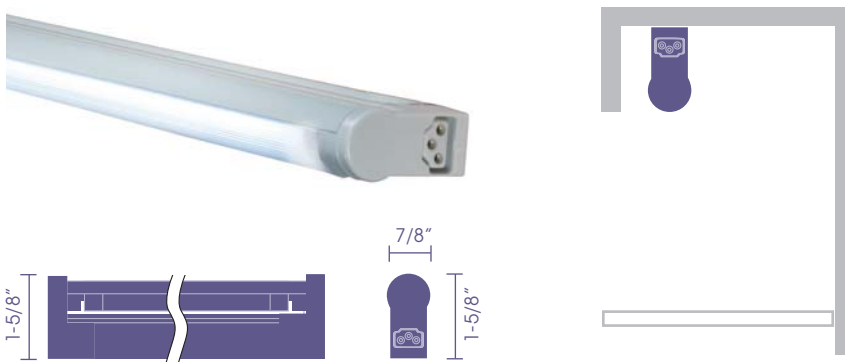

Model	Dimensions	Max Watt	Lumens*	Finish
SG4A-6**	9-1/2"L x 7/8"W x 1-5/8"H	6W	480	S-Silver, W-White
SG4A-8	13-3/4"L x 7/8"W x 1-5/8"H	8W	600	S-Silver, W-White
SG4A-12	17-3/4"L x 7/8"W x 1-5/8"H	12W	800	S-Silver, W-White
SG4A-16	19-1/2"L x 7/8"W x 1-5/8"H	16W	1000	S-Silver, W-White
SG4A-20	21-1/4"L x 7/8"W x 1-5/8"H	20W	1350	S-Silver, W-White
SG4A-22***	29-1/4"L x 7/8"W x 1-5/8"H	22W	1850	S-Silver, W-White
SG4A-24	34-5/8"L x 7/8"W x 1-5/8"H	24W	2150	S-Silver, W-White
SG4A-28	46-1/2"L x 7/8"W x 1-5/8"H	28W	2900	S-Silver, W-White

Lamp Options

30	3000K	BK	Black
41	4100K	BU	Blue
64	6400K	GN	Green
		RD	Red

Ordering Instructions

Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: SG4A-8SW/30-W

(with Rocker Switch)

SG4A-8/30-W

(without Rocker Switch)

Features:

- Sleek Plus T4 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 16,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

** The 6W fixture is not available with a Rocker Switch.

***SG4-22 only offered with 4100K lamp.



Model	Dimensions	Max Watt	Lumens*	Finish
SG4-6**	9-3/8"L x 3/4"W x 1-1/4"H	6W	480	W-White
SG4-8	13-1/2"L x 3/4"W x 1-1/4"H	8W	600	W-White
SG4-12	17-1/2"L x 3/4"W x 1-1/4"H	12W	800	W-White
SG4-16	19-1/2"L x 3/4"W x 1-1/4"H	16W	1000	W-White
SG4-20	21"L x 3/4"W x 1-1/4"H	20W	1350	W-White
SG4-22***	29"L x 3/4"W x 1-1/4"H	22W	1850	W-White
SG4-24	34-1/2"L x 3/4"W x 1-1/4"H	24W	2150	W-White
SG4-28	46-1/4"L x 3/4"W x 1-1/4"H	28W	2900	W-White

Lamp Options

30	3000K	BK	Black
41	4100K	BU	Blue
64	6400K	GN	Green
		RD	Red

Ordering Instructions

Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: SG4-8SW/30-W (with Rocker Switch)
SG4-8/30-W (without Rocker Switch)


SLEEK PLUS ■ ADJUSTABLE T5 – 3-WIRE GROUNDED

Features:

- Sleek Plus Adjustable T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, anodized silver or white enamel painted finish.
- Includes a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

**The 6W and 8W fixtures are not available with a Rocker Switch.

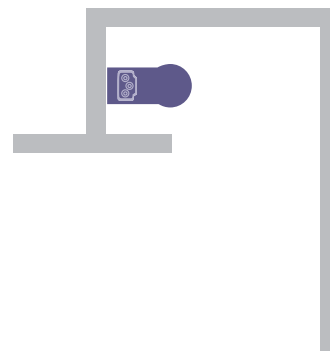

Model	Dimensions	Max Watt	Lumens*	Finish
SG5A-6**	9-1/2"L x 7/8"W x 1-5/8"H	6W	480	S-Silver, W-White
SG5A-8**	12-1/2"L x 7/8"W x 1-5/8"H	8W	600	S-Silver, W-White
SG5A-14	22-7/8"L x 7/8"W x 1-5/8"H	14W	1350	S-Silver, W-White
SG5A-21	34-5/8"L x 7/8"W x 1-5/8"H	21W	2150	S-Silver, W-White
SG5A-28	46-1/2"L x 7/8"W x 1-5/8"H	28W	2900	S-Silver, W-White
SG5A-35	58-1/4"L x 7/8"W x 1-5/8"H	35W	3650	S-Silver, W-White

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

Ordering Instructions

Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5A-14SW/30-W** (with Rocker Switch)
SG5A-14/30-W (without Rocker Switch)

Features:

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.



Model	Dimensions	Max Watt	Lumens*	Finish
SG5-6**	9-3/8"L x 3/4"W x 1-1/2"H	6W	480	W-White
SG5-8**	12-3/8"L x 3/4"W x 1-1/2"H	8W	600	W-White
SG5-14	22-3/4"L x 3/4"W x 1-1/2"H	14W	1350	W-White
SG5-21	34-1/2"L x 3/4"W x 1-1/2"H	21W	2150	W-White
SG5-28	46-1/4"L x 3/4"W x 1-1/2"H	28W	2900	W-White
SG5-35	58 "L x 3/4"W x 1-1/2"H	35W	3650	W-White

* The information on LUMENS is based on cool white lamps.

**The 6W and 8W fixtures are not available with a Rocker Switch.

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

Ordering Instructions


Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5-14SW/30-W** (with Rocker Switch)
SG5-14/30-W (without Rocker Switch)

SLEEK PLUS ■ ADJUSTABLE HIGH OUTPUT T5 – 3-WIRE GROUNDED

Features:

- Sleek Plus Adjustable T5 HO fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replace-able lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, anodized silver or white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The High Output T5 lamps (included with fixtures) offer increased light output—up to 70% more lumens than standard T5 lamps.
- High Output T5 lamps are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus is linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

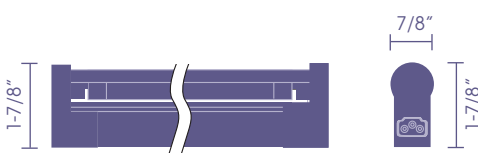

Model	Dimensions	Max Watt	Lumens*	Finish
SG5AHO-24	22-7/8" L x 7/8" W x 1-7/8" H	24W	2200	S-Silver, W-White
SG5AHO-39	34-5/8" L x 7/8" W x 1-7/8" H	39W	3500	S-Silver, W-White
SG5AHO-54	46-1/2" L x 7/8" W x 1-7/8" H	54W	5000	S-Silver, W-White

* The information on LUMENS is based on cool white lamps.

Lamp Options

30	3000K	BU	Blue
35	3500K	GN	Green
41	4100K	RD	Red
50	5000K		
64	6400K		

Ordering Instructions


Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5AHO-24SW/30-W** (with Rocker Switch)

SG5AHO-24/30-W (without Rocker Switch)

Features:

- Sleek Plus T5 HO fluorescent fixtures are furnished with replace-able lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The High Output T5 lamps (included with fixtures) offer increased light output—up to 70% more lumens than standard T5 lamps.
- High Output T5 lamps are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus is linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

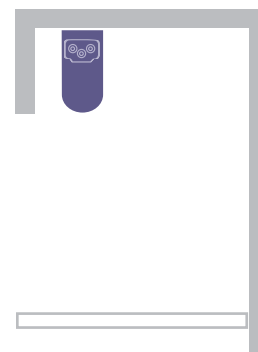

Model	Dimensions	Max Watt	Lumens*	Finish
SG5HO-24	22-5/8"L x 7/8"W x 1-3/4"H	24W	2200	W-White
SG5HO-39	34-3/8"L x 7/8"W x 1-3/4"H	39W	3500	W-White
SG5HO-54	46-1/4"L x 7/8"W x 1-3/4"H	54W	5000	W-White

* The information on LUMENS is based on cool white lamps.

Lamp Options

30	3000K	BU	Blue
35	3500K	GN	Green
41	4100K	RD	Red
50	5000K		
64	6400K		

Ordering Instructions



Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5HO-24SW/30-W** (with Rocker Switch)
SG5HO-24/30-W (without Rocker Switch)

SLEEK PLUS ■ ADJUSTABLE 24V LOW VOLTAGE T5 – 3-WIRE GROUNDED

Features:

- Sleek Plus Adjustable T5 LV fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Suitable for Low Voltage applications.
- Patent pending fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 24V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus is linkable up to 10 units, 350 watts (max).
- Compatible with 3-wire components on page 19.

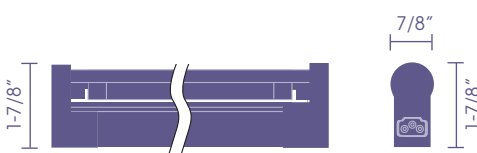

Model	Dimensions	Max Watt	Lumens*	Finish
SG5ALV-14	22-7/8" L x 7/8" W x 1-7/8" H	14W	1350	W-White
SG5ALV-21	34-5/8" L x 7/8" W x 1-7/8" H	21W	2150	W-White
SG5ALV-28	46-1/4" L x 7/8" W x 1-7/8" H	28W	2900	W-White

* The information on LUMENS is based on cool white lamps.

Integrated 24V ballast operates a standard T5 fluorescent with 24V input. For remote 120V/24V transformer, please consult factory.

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		


Ordering Instructions

Model / Lamp Option – Finish

Example: SG5ALV-14/30-W

Features:

- Sleek Plus T5 LV fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed acrylic lamp covers.
- Suitable for Low Voltage applications.
- The housing is made of extruded aluminum with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC 24V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus is linkable up to 10 units, 350 watts (max).
- Compatible with 3-wire components on page 19.



Model	Dimensions	Max Watt	Lumens*	Finish
SG5LV-14	22-5/8"L x 7/8"W x 1-3/4"H	14W	1350	W-White
SG5LV-21	34-3/8"L x 7/8"W x 1-3/4"H	21W	2150	W-White
SG5LV-28	46-1/4"L x 7/8"W x 1-3/4"H	28W	2900	W-White

* The information on LUMENS is based on cool white lamps.

Integrated 24V ballast operates a standard T5 fluorescent with 24V input. For remote 120V/24V transformer, please consult factory.

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

Ordering Instructions


Model / Lamp Option – Finish

Example: SG5LV-14/30-W

Features:

- Sleek Plus T5 Corner Light fluorescent fixtures are furnished with replaceable lamps, tight-fit direct connectors, stainless steel mounting clips, and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The fixture includes a removable specular aluminum reflector strip for precise directed lighting.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

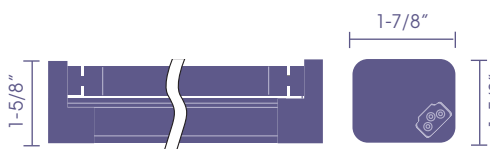

Model	Dimensions	Max Watt	Lumens*	Finish
SG5CL-6SW	10-3/4"L x 1-7/8"W x 1-5/8"H	6W	480	W-White
SG5CL-8SW	13-3/4"L x 1-7/8"W x 1-5/8"H	8W	600	W-White
SG5CL-14SW	24"L x 1-7/8"W x 1-5/8"H	14W	1350	W-White
SG5CL-21SW	35-3/4"L x 1-7/8"W x 1-5/8"H	21W	2150	W-White
SG5CL-28SW	47-5/8"L x 1-7/8"W x 1-5/8"H	28W	2900	W-White
SG5CL-35SW	59-3/8"L x 1-7/8"W x 1-5/8"H	35W	3650	W-White

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		



Ordering Instructions

Model / Lamp Option – Finish

Example: SG5CL-8SW/30-W (Standard with Rocker Switch)

Features:

- Sleek Plus Twin Adjustable T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed lamp covers.
- The housing is made of extruded aluminum with anodized silver or white enamel paint finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

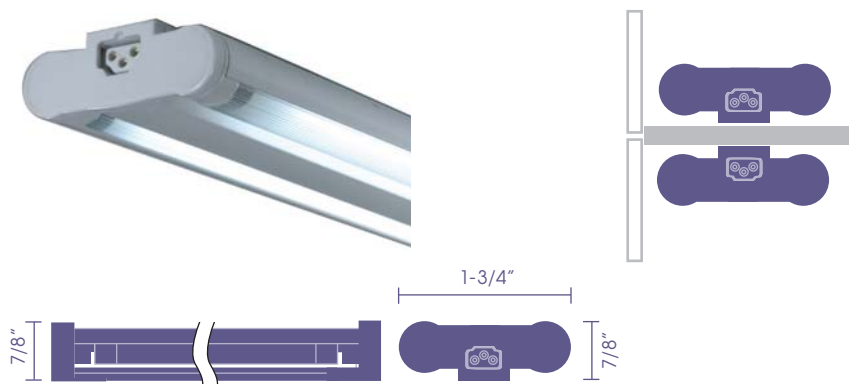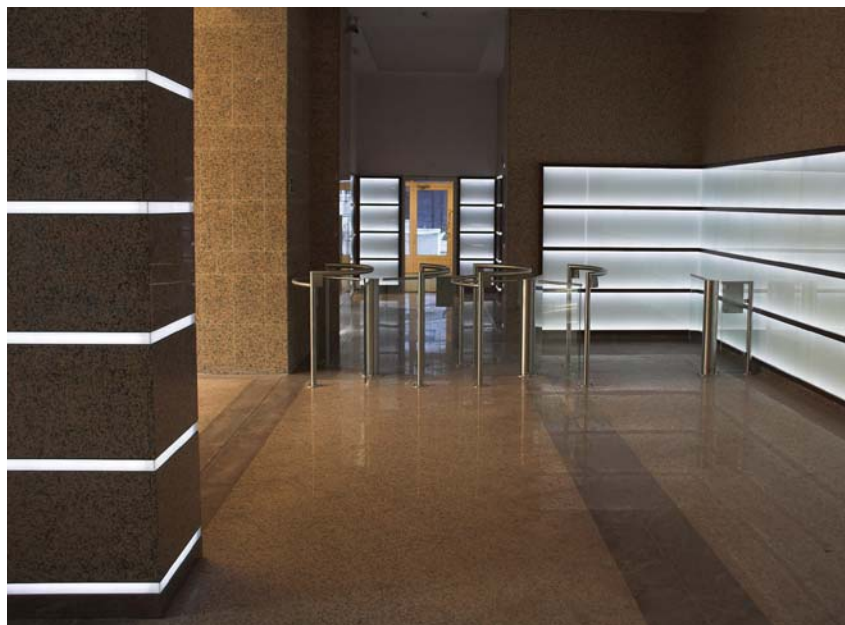

Model	Dimensions	Max Watt	Lumens*	Finish
SG5AT-14	22-7/8"L x 1-3/4"W x 7/8"H	14W	1350	S-Silver, W-White
SG5AT-21	34-5/8"L x 1-3/4"W x 7/8"H	21W	2150	S-Silver, W-White
SG5AT-28	46-1/2"L x 1-3/4"W x 7/8"H	28W	2900	S-Silver, W-White
SG5AT-35	58-1/4"L x 1-3/4"W x 7/8"H	35W	3650	S-Silver, W-White

* The information on LUMENS is based on cool white lamps.

Lamp Options

30	3000K	BK	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

Ordering Instructions


Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5AT-14SW/30-W** (with Rocker Switch)
SG5AT-14/30-W (without Rocker Switch)

Features:

- Sleek Plus Twin Adjustable T5 HO fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips; and ribbed lamp covers.
- The housing is made of extruded aluminum with anodized silver or white enamel paint finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The High Output T5 lamps (included with fixtures) offer up to 70% more lumens than standard T5 lamps and are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-wire components on page 19.

* The information on LUMENS is based on cool white lamps.

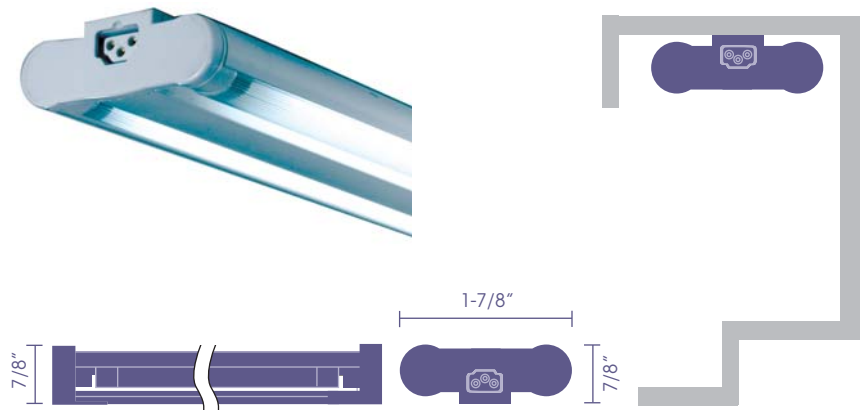

Model	Dimensions	Max Watt	Lumens*	Finish
SG5ATHO-24	22-7/8"L x 1-7/8"W x 7/8"H	24W	2200	S-Silver, W-White
SG5ATHO-39	34-5/8"L x 1-7/8"W x 7/8"H	39W	3500	S-Silver, W-White
SG5ATHO-54	46-1/2"L x 1-7/8"W x 7/8"H	54W	5000	S-Silver, W-White

Lamp Options

30	3000K	BU	Blue
35	3500K	GN	Green
41	4100K	RD	Red
50	5000K		
64	6400K		

Ordering Instructions

Model	Optional Switch – Add "SW"	/	Lamp Option	–	Finish
-------	----------------------------	---	-------------	---	--------

Examples: **SG5ATHO-24SW/24-W** (with Rocker Switch)

SG5ATHO-24/24-W (without Rocker Switch)

	Description	2-Wire Accessories Model	3-Wire Accessories Model
	Direct Connector	SP-DC	SG-DC
	Connecting Cable		
	6"	SP-CC6	SG-CC6
	12"	SP-CC12	SG-CC12
	24"	SP-CC24	SG-CC24
	36"	SP-CC36	SG-CC36
	Right Angle Connecting Cable		
	6"	SP-CC6L	SG-CC6L
	12"	SP-CC12L	SG-CC12L
	24"	SP-CC24L	SG-CC24L
	36"	SP-CC36L	SG-CC36L
	Power Cord & Plug	2 Prong Plug	3 Prong Plug
	2' Black		SG-PC24-B
	6' White	SP-PC72-W	SG-PC72-W
	6' Gray		SG-PC72-G
	8' White		SG-PC96-W
	12' White		SG-PC144-W
	6' Power Cord & Plug with Switch	2 Prong Plug SP-PCSW	N/A
	6' Right Angle Power Cord & Plug	2 Prong Plug SP-PCLR	3 Prong Plug SG-PCLR
	6' Left Angle Power Cord & Plug	2 Prong Plug SP-PCLL	3 Prong Plug SG-PCLL
	6' Grounded Power Cord & 3-Prong Plug	2 Prong Plug SP-PC3	N/A
	Stainless Steel Mounting Clip For Vertical & Horizontal Mount	SG-MC-VH	SG-MC-VH
	Stainless Steel Mounting Clip For Vertical Mount	SG-MC-V	SG-MC-V
	Plastic Hardwire Box with Control Switch (3-5/8"L x 2-1/4"W x 1-3/8"H)	SP-B	SG-B
	Commercial Grade Metal Hardwire Box <i>Enables Fixtures to be Controlled by Wall Switch</i> (2-3/4"L x 1-3/4"W x 1-3/4"H)	SP-BM	SG-BM
	Sleek Plus Power Strip with 6 Outlets <i>Includes (1) Direct Connector (SP-DC)</i> (36"L x 7/8"W x 7/8"H)	SP-PS3	SG-PS3
	Sleek Plus Power Strip with 12 Outlets <i>Includes (1) Direct Connector (SP-DC)</i> (72"L x 7/8"W x 7/8"H)	SP-PS6	SG-PS6

SLEEK PLUS ■ REPLACEMENT T4 FLUORESCENT LAMPS

Sleek Plus fixtures are shipped with lamps installed. For replacements, or for special colors, orders can be placed at JESCO using the following model numbers.

	Model	Volt	Watt	Color Temp	Lumens	CRI	MOL
	SL4-L6/30	120v	6w	3000K	480	82+	1/2"Ø x 9"
	SL4-L6/41	120v	6w	4100K	480	82+	1/2"Ø x 9"
	SL4-L6/64	120v	6w	6400K	480	82+	1/2"Ø x 9"
	SL4-L6/RD	120v	6w	Red	480	82+	1/2"Ø x 9"
	SL4-L6/BU	120v	6w	Blue	480	82+	1/2"Ø x 9"
	SL4-L6/GN	120v	6w	Green	480	82+	1/2"Ø x 9"
	SL4-L6/BK	120v	6w	Black	480	82+	1/2"Ø x 9"
	SL4-L8/30	120v	8w	3000K	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/41	120v	8w	4100K	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/64	120v	8w	6400K	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/RD	120v	8w	Red	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/BU	120v	8w	Blue	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/GN	120v	8w	Green	600	82+	1/2"Ø x 13-1/8"
	SL4-L8/BK	120v	8w	Black	600	82+	1/2"Ø x 13-1/8"
	SL4-L12/30	120v	12w	3000K	800	82+	1/2"Ø x 17"
	SL4-L12/41	120v	12w	4100K	800	82+	1/2"Ø x 17"
	SL4-L12/64	120v	12w	6400K	800	82+	1/2"Ø x 17"
	SL4-L12/RD	120v	12w	Red	800	82+	1/2"Ø x 17"
	SL4-L12/BU	120v	12w	Blue	800	82+	1/2"Ø x 17"
	SL4-L12/GN	120v	12w	Green	800	82+	1/2"Ø x 17"
	SL4-L12/BK	120v	12w	Black	800	82+	1/2"Ø x 17"
	SL4-L16/30	120v	16w	3000K	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/41	120v	16w	4100K	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/64	120v	16w	6400K	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/RD	120v	16w	Red	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/BU	120v	16w	Blue	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/GN	120v	16w	Green	1000	82+	1/2"Ø x 18-3/4"
	SL4-L16/BK	120v	16w	Black	1000	82+	1/2"Ø x 18-3/4"
	SL4-L20/30	120v	20w	3000K	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/41	120v	20w	4100K	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/64	120v	20w	6400K	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/RD	120v	20w	Red	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/BU	120v	20w	Blue	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/GN	120v	20w	Green	1350	82+	1/2"Ø x 20-1/2"
	SL4-L20/BK	120v	20w	Black	1350	82+	1/2"Ø x 20-1/2"
	SL4-L22/41	120v	22w	4100	1850	82+	1/2"Ø x 28"
	SL4-L24/30	120v	24w	3000K	2150	82+	1/2"Ø x 34"
	SL4-L24/41	120v	24w	4100K	2150	82+	1/2"Ø x 34"
	SL4-L24/64	120v	24w	6400K	2150	82+	1/2"Ø x 34"
	SL4-L24/RD	120v	24w	Red	2150	82+	1/2"Ø x 34"
	SL4-L24/BU	120v	24w	Blue	2150	82+	1/2"Ø x 34"
	SL4-L24/GN	120v	24w	Green	2150	82+	1/2"Ø x 34"
	SL4-L24/BK	120v	24w	Black	2150	82+	1/2"Ø x 34"
	SL4-L28/30	120v	28w	3000K	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/41	120v	28w	4100K	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/64	120v	28w	6400K	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/RD	120v	28w	Red	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/BU	120v	28w	Blue	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/GN	120v	28w	Green	2900	82+	1/2"Ø x 45-3/4"
	SL4-L28/BK	120v	28w	Black	2900	82+	1/2"Ø x 45-3/4"

Average Life: 16,000 Hours
Burning Position: Any

UV lamps available – Consult factory.

Color Temperature:
3000K Warm White (Soft White)
4100K Cool White
6400K Daylight

SLEEK PLUS ■ REPLACEMENT T5 FLUORESCENT LAMPS

	Model	Volt	Watt	Color Temp	Lumens	CRI	MOL
	SL5-L6/30	120v	6w	3000K	480	82+	5/8"Ø x 9"
	SL5-L6/35	120v	6w	3500K	480	82+	5/8"Ø x 9"
	SL5-L6/41	120v	6w	4100K	480	82+	5/8"Ø x 9"
	SL5-L6/50	120v	6w	5000K	480	82+	5/8"Ø x 9"
	SL5-L6/64	120v	6w	6400K	480	82+	5/8"Ø x 9"
	SL5-L6/RD	120v	6w	Red	480	82+	5/8"Ø x 9"
	SL5-L6/BU	120v	6w	Blue	480	82+	5/8"Ø x 9"
	SL5-L6/GN	120v	6w	Green	480	82+	5/8"Ø x 9"
	SL5-L8/30	120v	8w	3000K	600	82+	5/8"Ø x 12"
	SL5-L8/35	120v	8w	3500K	600	82+	5/8"Ø x 12"
	SL5-L8/41	120v	8w	4100K	600	82+	5/8"Ø x 12"
	SL5-L8/50	120v	8w	5000K	600	82+	5/8"Ø x 12"
	SL5-L8/64	120v	8w	6400K	600	82+	5/8"Ø x 12"
	SL5-L8/RD	120v	8w	Red	600	82+	5/8"Ø x 12"
	SL5-L8/BU	120v	8w	Blue	600	82+	5/8"Ø x 12"
	SL5-L8/GN	120v	8w	Green	600	82+	5/8"Ø x 12"
	SL5-L14/30	120v	14w	3000K	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/35	120v	14w	3500K	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/41	120v	14w	4100K	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/50	120v	14w	5000K	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/64	120v	14w	6400K	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/RD	120v	14w	Red	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/BU	120v	14w	Blue	1350	82+	5/8"Ø x 22-1/4"
	SL5-L14/GN	120v	14w	Green	1350	82+	5/8"Ø x 22-1/4"
	SL5-L21/30	120v	21w	3000K	2150	82+	5/8"Ø x 36"
	SL5-L21/35	120v	21w	3500K	2150	82+	5/8"Ø x 36"
	SL5-L21/41	120v	21w	4100K	2150	82+	5/8"Ø x 36"
	SL5-L21/50	120v	21w	5000K	2150	82+	5/8"Ø x 36"
	SL5-L21/64	120v	21w	6400K	2150	82+	5/8"Ø x 36"
	SL5-L21/RD	120v	21w	Red	2150	82+	5/8"Ø x 36"
	SL5-L21/BU	120v	21w	Blue	2150	82+	5/8"Ø x 36"
	SL5-L21/GN	120v	21w	Green	2150	82+	5/8"Ø x 36"
	SL5-L28/30	120v	28w	3000K	2900	82+	5/8"Ø x 48"
	SL5-L28/35	120v	28w	3500K	2900	82+	5/8"Ø x 48"
	SL5-L28/41	120v	28w	4100K	2900	82+	5/8"Ø x 48"
	SL5-L28/50	120v	28w	5000K	2900	82+	5/8"Ø x 48"
	SL5-L28/64	120v	28w	6400K	2900	82+	5/8"Ø x 48"
	SL5-L28/RD	120v	28w	Red	2900	82+	5/8"Ø x 48"
	SL5-L28/BU	120v	28w	Blue	2900	82+	5/8"Ø x 48"
	SL5-L28/GN	120v	28w	Green	2900	82+	5/8"Ø x 48"
	SL5-L35/30	120v	35w	3000K	3650	82+	5/8"Ø x 60"
	SL5-L35/35	120v	35w	3500K	3650	82+	5/8"Ø x 60"
	SL5-L35/41	120v	35w	4100K	3650	82+	5/8"Ø x 60"
	SL5-L35/50	120v	35w	5000K	3650	82+	5/8"Ø x 60"
	SL5-L35/64	120v	35w	6400K	3650	82+	5/8"Ø x 60"
	SL5-L35/RD	120v	35w	Red	3650	82+	5/8"Ø x 60"
	SL5-L35/BU	120v	35w	Blue	3650	82+	5/8"Ø x 60"
	SL5-L35/GN	120v	35w	Green	3650	82+	5/8"Ø x 60"
	SL5-L35/BK	120v	35w	Black	3650	82+	5/8"Ø x 60"

Average Life: 20,000 Hours
Burning Position: Any

UV lamps available – Consult factory.

Color Temperature:

3000K Warm White (Soft White)
3500K Natural White
4100K Cool White

5000K Designer White
6400K Daylight

SLEEK PLUS ■ REPLACEMENT T5 HIGH OUTPUT FLUORESCENT LAMPS

	Model	Volt	Watt	Color Temp	Lumens	CRI	MOL
	SL5-L24HO/30	120v	24w	3000K	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/35	120v	24w	3500K	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/41	120v	24w	4100K	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/50	120v	24w	5000K	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/64	120v	24w	6400K	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/RD	120v	24w	Red	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/BU	120v	24w	Blue	2200	82+	5/8"Ø x 22-1/4"
	SL5-L24HO/GN	120v	24w	Green	2200	82+	5/8"Ø x 22-1/4"
	SL5-L39HO/30	120v	39w	3000K	3500	82+	5/8"Ø x 36"
	SL5-L39HO/35	120v	39w	3500K	3500	82+	5/8"Ø x 36"
	SL5-L39HO/41	120v	39w	4100K	3500	82+	5/8"Ø x 36"
	SL5-L39HO/50	120v	39w	5000K	3500	82+	5/8"Ø x 36"
	SL5-L39HO/64	120v	39w	6400K	3500	82+	5/8"Ø x 36"
	SL5-L39HO/RD	120v	39w	Red	3500	82+	5/8"Ø x 36"
	SL5-L39HO/BU	120v	39w	Blue	3500	82+	5/8"Ø x 36"
	SL5-L39HO/GN	120v	39w	Green	3500	82+	5/8"Ø x 36"
	SL5-L54HO/30	120v	54w	3000K	5000	82+	5/8"Ø x 48"
	SL5-L54HO/35	120v	54w	3500K	5000	82+	5/8"Ø x 48"
	SL5-L54HO/41	120v	54w	4100K	5000	82+	5/8"Ø x 48"
	SL5-L54HO/50	120v	54w	5000K	5000	82+	5/8"Ø x 48"
	SL5-L54HO/64	120v	54w	6400K	5000	82+	5/8"Ø x 48"
	SL5-L54HO/RD	120v	54w	Red	5000	82+	5/8"Ø x 48"
	SL5-L54HO/BU	120v	54w	Blue	5000	82+	5/8"Ø x 48"
	SL5-L54HO/GN	120v	54w	Green	5000	82+	5/8"Ø x 48"

Average Life: 20,000 Hours

Burning Position: Any

UV lamps available – Consult factory.

Color Temperature:

3000K Warm White (Soft White)

3500K Natural White

4100K Cool White

5000K

Designer White

6400K

Daylight

Ordering Instructions

Model	Lamp Type	Wattage	Color Temp
SL	4	L	
	4 = T4	6	30 = 3000K
		8	41 = 4100K
		12	64 = 6400K
		16	RD = Red
		20	BU = Blue
		22	GN = Green
		24	BK = Black
		28	

Model	Lamp Type	Wattage	Color Temp
SL	5	L-	
	5 = T5	6	30 = 3000K
		8	35 = 3500K
		14	41 = 4100K
		21	50 = 5000K
		28	64 = 6400K
		35	RD = Red
			BU = Blue
			GN = Green
			BK = Black




Simple to mount

Simple to wire

Simple to aim

Simple to maintain

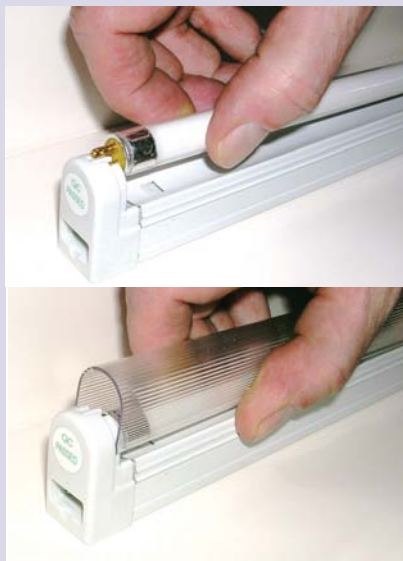

High efficiency shelf, cabinet, and cove lighting solutions for residential and commercial applications.

INDEX

MODEL NUMBER	PAGE	MODEL NUMBER	PAGE	MODEL NUMBER	PAGE
SG4-6.....	9	SG5A-28.....	10	SG-CC36L.....	19
SG4-8.....	9	SG5A-35.....	10	SG-DC.....	19
SG4-12.....	9	SG5AT-14.....	17	SG-MC-V.....	19
SG4-16.....	9	SG5AT-21.....	17	SG-MC-VH.....	19
SG4-20.....	9	SG5AT-28.....	17	SG-PC24-B.....	19
SG4-22.....	9	SG5AT-35.....	17	SG-PC72-G.....	19
SG4-24.....	9	SG5CL-6.....	16	SG-PC72-W.....	19
SG4-28.....	9	SG5CL-8.....	16	SG-PC96-W.....	19
SG4A-6.....	8	SG5CL-14.....	16	SG-PC144-W.....	19
SG4A-8.....	8	SG5CL-21.....	16	SG-PCLR.....	19
SG4A-12.....	8	SG5CL-28.....	16	SG-PCLL.....	19
SG4A-16.....	8	SG5CL-35.....	16	SG-PS3.....	19
SG4A-20.....	8	SG5ALV-14.....	14	SG-PS6.....	19
SG4A-22.....	8	SG5ALV-21.....	14	SL4.....	20
SG4A-24.....	8	SG5ALV-28.....	14	SL5.....	21
SG4A-28.....	8	SG5LV-14.....	15	SL5/ HO.....	22
SP4-6.....	6	SG5LV-21.....	15	SL5/ HO RGB.....	22
SP4-8.....	6	SG5LV-28.....	15	SP-B.....	19
SP4-12.....	6	SG5AHO-24.....	12	SP-BM.....	19
SP4-16.....	6	SG5AHO-39.....	12	SP-CC6.....	19
SP4-20.....	6	SG5AHO-54.....	12	SP-CC6L.....	19
SP4-24.....	6	SG5ATHO-24.....	18	SP-CC12.....	19
SP4-28.....	6	SG5ATHO-39.....	18	SP-CC12L.....	19
SP5-14.....	7	SG5ATHO-54.....	18	SP-CC24.....	19
SP5-21.....	7	SG5HO-24.....	13	SP-CC24L.....	19
SP5-28.....	7	SG5HO-39.....	13	SP-CC36.....	19
SG5-6.....	11	SG5HO-54.....	13	SP-CC36L.....	19
SG5-8.....	11	SG-B.....	19	SP-DC.....	19
SG5-14.....	11	SG-BM.....	19	SP-PC3.....	19
SG5-21.....	11	SG-CC6.....	19	SP-PC72-W.....	19
SG5-28.....	11	SG-CC6L.....	19	SP-PCLR.....	19
SG5-35.....	11	SG-CC12.....	19	SP-PCLL.....	19
SG5A-6.....	10	SG-CC12L.....	19	SP-PCSW.....	19
SG5A-8.....	10	SG-CC24.....	19	SP-PS3.....	19
SG5A-14.....	10	SG-CC24L.....	19	SP-PS6.....	19
SG5A-21.....	10	SG-CC36.....	19		

JESCO LIGHTING GROUP LITERATURE

Track Lighting



Low Voltage Monorail
Quick Adapt System
Wall Sconces

Architectural Track Lighting

Summer 2006

Residential & Commercial Track Lighting

Fall 2006

Line Voltage Monorail

Spring 2007

Recessed Downlights



Miniature Recessed Lighting
3" & 4" Aperture



Recessed Lighting
5" & 6" Aperture


Recessed Multiple Downlights

Summer 2006

Residential & Commercial Downlights

Winter 2006

Decoratives



Mult-Lite

Volume I

Summer 2006

Volume II

Winter 2006

Specialty Lighting



Sleek Plus



Light-Stix

Display & Exhibition Lighting

Summer 2006

Colormotion



Illustrated Product Guide

Commercial & Residential

Fall 2006

Sign Solutions

Fall 2006

Custom LED

Spring 2007

Outdoor



Winter 2006

Others



Mini Catalog



Illustrated Product Guide

www.jescolighting.com



NEW YORK

66-25 Traffic Avenue
Glendale, NY 11385
Tel. 718.366.3211
Tel. 800.527.7796
Fax: 718.366.3646

LOS ANGELES

1100 Hatcher Avenue, Suite A
City of Industry, CA 91748
Tel. 626.854.8168
Fax: 626.854.8172

Email: info@jescolighting.com

www.jescolighting.com

JESCO LIGHTING is a UL and ETL Listed company.
© 2006 JESCO LIGHTING. All rights reserved.