# Z-Bar® Solo Mini

Specifications Model number


Transformer (100–240 V; 50/60 Hz): Included – C-UL-US Certified

Energy Consumption: 7 watts
Number of LEDs: 28 LEDs
LED Rated Lifespan: 50,000 hours
Color Temperature (Typical) – Cool: 4,500 K
Color Temperature (Typical) – Warm: 3,500 K

Color Rendering Index (CRI): 85
Dimmer: Built-in touchstrip

Brightness Adjustability: Continuous
Color Finish: Metallic Black, Silver
Material: Aluminum/Plastic

Cord Color: Black
Cord Length: 9'




#### **Dimensions**

## Mounting options / Accessories (\*optional)

Light source placed at 15" away from worksurface



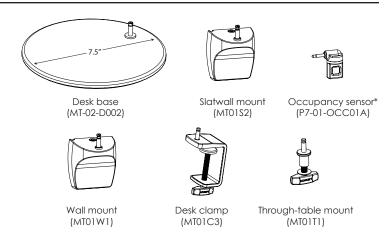

## LEED credit eligibility

## Photometrics

## Energy & Atmosphere (EA)

Credit 1.1: Optimize Energy Performance LED lighting to reduce energy consumption. (Potential points: 3)

## Innovation In Design (ID)

Credit 1.1-1.4: Innovation in Design

Z-Bar® Solo Mini uses a single arm for a more compact design with an LED head able to fold flat against the body. The lamp also features a built-in touchstrip for flicker-free touch sensitive dimming. (Potential points: 4)

### Materials & Resources (MR)

Credit 4.1: Recycled Content - 10%

Lamps contain parts made out of 10% pre-consumer recycled content. (Potential points: 1)

Credit 4.2: Recycled Content - 20%

Lamps contain parts made out of 20% pre-consumer recycled content. (Potential points: 2)

#### 160 140 120 Brightness (fc) 100 80 60 40 20 0 0 3 6 12 15 18 21 Distance from center (in)

#### **Environmental considerations**

Lamp contains 63% preconsumer recycled material by weight\* Aluminum housing is fully recyclable All color finishes use water-based paint All cardboard used in packaging is FSC certified LEDs do not contain mercury

\*in standard configuration (includes transformer and weighted base)