

# SATURN

## LED SERIES

Job Name	
Catalog Number	
Notes	Type



Scan QR code to be directed to this product on the web!



### housing

- One piece die formed steel
- Brushed finish
- Low profile, distinctively designed

### lens

- Symmetrically contoured diffuser retained by distinctive accent rings
- Smooth white acrylic

### electrical

- 16" model - 1500 lumens, 28W
- 18" model - 1700 lumens, 31W
- Luminous Efficacy - 72lm/W
- U.L. Listed, IBEW union made
- Indoor use

### options

**OPTIONS: INSERT APPROPRIATE CODE FOR CUSTOMIZED ORDERING**

#### VOLTAGE

U Universal 120 - 277V

#### COLOR

N Brushed nickel accent rings

#### GENERAL OPTIONS

C Collar - add 1 3/8" to height

SW Smooth white acrylic lens

HF High frequency motion sensor (requires optional collar)

#### COLOR TEMP


41 4100K

30 3000K

Consult factory for additional options not shown or listed

### ordering guide

MODEL#	SIZE	WATTAGE	VOLTAGE	DIFFUSER	COLOR TEMP
SUNL	16	28	U	SW	41, 30
SUNL	18	31	U	SW	41, 30

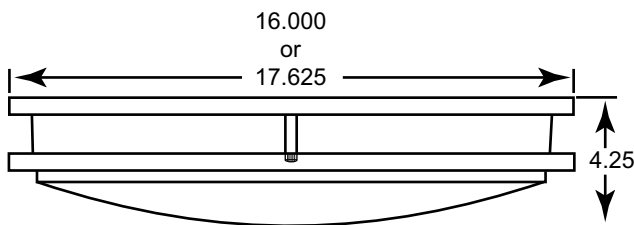

Scan QR code to be directed to our home page!



**LAMAR LIGHTING** 485 Smith Street, Farmingdale, NY 11735 • Tel (631) 777-7700  
 Fax (631) 777-7705 • Outside NY (800) 724-7743 • www.lamarlighting.com

Revised  
11/12

