



WS/WW SERIES PREMIUM WRAPAROUND



application

- Versatile, low profile luminaire with a low brightness diffuser, ideal for schools, offices, showrooms and a broad variety of commercial and institutional applications
- Able to be surface or pendant mounted individually or in rows for a continuous linear look
- Available in 2 or 4 light, multiple lengths and numerous lamp/ballast combinations

diffuser

- One piece extruded 100% clear virgin acrylic prismatic lens
- Wide diffuser design provides lower brightness than narrow wrap fixtures
- Features a prismatic pattern on the bottom and linear refractive sides
- Lift and shift lens for ease of re-lamping and cleaning
- Self-hinging lens hooks onto full length of housing and may hinge from either side
- Joiner band supplied on 6 and 8-ft. units, utilizing two lenses, for a finished appearance

construction

- The WS/WW series is a high quality fluorescent wraparound specifically designed for long-term, heavy-duty installation
- Features durable steel bodies, quality paint finishes and superior electrical components
- Ends are embossed for added strength and fastened securely to the housing by rivets
- Die formed from cold rolled steel for strength and uniformity
- Available in New York City code (20 ga.) and UL code (23 ga.) steel
- Wireway covers easily attach without the use of tools
- Wiring components are secured to the back housing, allowing removal of the cover for easy maintenance, without disturbing any wiring
- Ample knockouts are provided on back and sides for convenient installation
- All fixtures are U.L. listed and IBEW union made

electrical

- All electrical components are U.L. listed
- Ballasts are class P, thermally protected
- 120V normal power factor is standard on all 2 ft. units
- 120V high power factor, energy saving ballasts comply with Federal Energy Efficiency Standards and are standard on all 4 ft. units
- Numerous options are available: slimline or T8 electronic; see ordering information on back

finish

- Prior to painting, all metal parts are treated with a multi-stage phosphate bonding process to ensure adhesion and inhibit rusting
- Painted with a lighting grade baked white enamel, having a reflectance factor exceeding 87% for premium quality and durability

ordering guide

NOTE: SOME ORDERING OPTIONS APPEAR ON PRODUCT LINE. FOR OTHER OPTIONS, SEE LIST AT RIGHT.

SAMPLE ORDER NUMBER



SERIES NO. WATTAGE TANDEM BALLAST TYPE VOLTAGE OPTIONS DIMENSIONS LAMP TYPE
LAMPS 1 2


T-12 ORDERING GUIDE								
WS	2	20		M2, MP	1, 7		11 5/16" x 24"	F20T12
WS	2	40		M2	1, 7		11 5/16" x 48"	F40T12
WS	2	30	T	M2	1, 7		11 5/16" x 72"	F30T12
WS	2	40	T	M2	1, 7		11 5/16" x 96"	F40T12
WS	2	48		M2, MH	1, 7		11 5/16" x 48"	F48T12/F48T12HO
WS	2	72		M2, MH	1, 7		11 5/16" x 72"	F72T12/F72T12HO
WS	2	96		M2, MH, HE	1, 7		11 5/16" x 96"	F96T12/F96T12HO
WW	4	20		M2, MP	1, 7		16" x 24"	F20T12
WW	4	40		M2	1, 7		16" x 48"	F40T12
WW	4	30	T	M2	1, 7		16" x 72"	F30T12
WW	4	40	T	M2	1, 7		16" x 96"	F40T12
WW	4	48		M2, MH	1, 7		16" x 48"	F48T12/F48T12HO
WW	4	72		M2, MH	1, 7		16" x 72"	F72T12/F72T12HO
WW	4	96		M2, MH, HE	1, 7		16" x 96"	F96T12/F96T12HO
T-8 ORDERING GUIDE								
WS	2	17		E8	1, 7		11 5/16" x 24"	F17T8
WS	2	32		E8	1, 7		11 5/16" x 48"	F32T8
WS	2	25	T	E8	1, 7		11 5/16" x 72"	F25T8
WS	2	32	T	E8	1, 7		11 5/16" x 96"	F32T8
WS	2	96		E8, H8	1, 7		11 5/16" x 96"	F96T8/F96T8HO
WW	4	17		E8	1, 7		16" x 24"	F17T8
WW	4	32		E8	1, 7		16" x 48"	F32T8
WW	4	25	T	E8	1, 7		16" x 72"	F25T8
WW	4	32	T	E8	1, 7		16" x 96"	F32T8
WW	4	96		E8, H8	1, 7		16" x 96"	F96T8/F96T8HO

Note: Tandem units contain double the amount of lamps shown


dimensional data

NOTE: SPECIFICATIONS AND DIMENSIONAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

cross sections

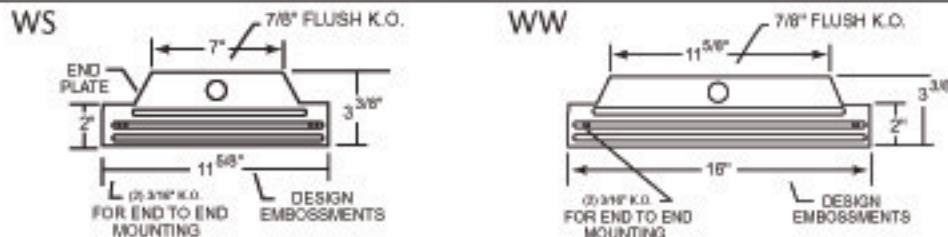

back knockout plans and lengths

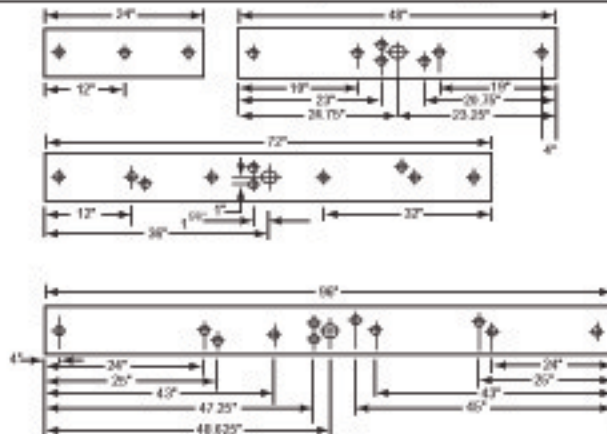

options

OPTIONS: INSERT APPROPRIATE CODE FOR CUSTOMIZED ORDERING

BALLAST

- M2 Magnetic T12
- MP Magnetic HPP
- E8 Electronic T8
- EB Electronic ballast
- MB Magnetic ballast
- MH Magnetic high output
- HE High output E8
- H8 High output T8
- EH Electronic high output
- EDX Electronic dimming Advance MX

VOLTAGE

- 1 120V
- 7 277V
- U Universal 120 - 277V

GENERAL OPTIONS

- EM Emergency pack, 1 lamp
90 min. up to 500 lu.
- 2C 2 Circuit
- NY 20 gauge *

Multiple cord options are available.
*Minimum quantities may apply
Consult factory

accessories

- RFWS Aluminum reflector
- RFWW Aluminum reflector
- TC Tubeguard + Length/Wattage
- Canopy Standard white 5" dia.,
1 1/2" deep with hardware
- Stem Stem + Length needed

LAMP OPTIONS

- 12 T8 741K
- 15 T8 735K
- 10 T8 730K
- 13 T8 841K
- 16 T8 835K
- 11 T8 830K

photometric data

SEE SECTION "P"
FOR PHOTOMETRIC DATA



Revised
2/03

Buy at www.goodmart.com or 877-402-6100