

V
SERIES
VERSATILE
UTILITY
LUMINAIRE

Job Name	
Catalog Number	
Notes	Type



application

- Decorative all-purpose luminaire, wall, ceiling or pendant mounted for residential, institutional or commercial applications
- Ideal for schools, hospitals, universities, commercial buildings, retail and food service areas where durability and aesthetics are important
- Available in 1, 2 or 3 light configurations utilizing T8 or T5 lamps up to 8 ft. long
- Available in standard white or optional custom colors

diffuser

- One piece extruded clear, non-yellowing acrylic radial lens
- Features a linear refractive pattern for even illumination
- Grooved formation on the edges allows for a tight, no light leak attachment to the body
- Optional end gasket

construction

- The V series is an high quality fluorescent luminaire specifically designed for durability in hi-visibility areas
- Features durable steel bodies, quality paint finishes and superior electrical components
- Manufactured from code gauge cold rolled steel for strength and uniformity.
- Ends are die-formed for added strength and a clean smooth look
- Diffuser retained by continuous groove which locks into body as well as overlapping ends to eliminate vibration hazards
- Wireway covers are die-formed for durability and removed for servicing
- Ample knockouts are provided on back for convenient installation
- All fixtures are U.L. listed and IBEW union made

electrical

- All electrical components are U.L. listed
- Electronic Class P, thermally protected ballasts standard
- Electronic ballasts comply with Federal Energy Efficiency Standards and are standard on all units
- Numerous options are available: see ordering information on back

finish

- Prior to painting, all metal parts are treated with a multi-stage phosphate bonding process to ensure adhesion and inhibit rusting
- Painted with a lighting grade baked white enamel, having a reflectance factor exceeding 87% for premium quality and durability
- Optional colors also available utilizing powder coated finishes (painted after fabrication) for premium quality and durability - Consult Factory



V SERIES

**VERSATILE FLUORESCENT
LUMINAIRE**

ordering guide

NOTE: SOME ORDERING OPTIONS APPEAR ON PRODUCT LINE.
FOR OTHER OPTIONS, SEE LIST AT RIGHT.

SAMPLE ORDER NUMBER



SERIES COLOR NO. LAMPS WATTAGE TANDEM BALLAST TYPE VOLTAGE OPTIONS 1 2 DIMENSIONS LAMP TYPE



T-8 ORDERING GUIDE										
V	W	1, 2, 3	17		E8	1, U			8" x 24"	F17T8
V	W	1, 2, 3	25		E8	1, U			8" x 36"	F25T8
V	W	1, 2, 3	32		E8	1, U			8" x 48"	F32T8
V	W	1, 2, 3	25	T	E8	1, U			8" x 72"	F25T8
V	W	1, 2, 3	32	T	E8	1, U			8" x 96"	F32T8
T-5 ORDERING GUIDE										
V	W	1, 2, 3	14, 24		E5, H5	1, U			8" x 24"	F14T5/F24T5HO
V	W	1, 2, 3	21, 39		E5, H5	1, U			8" x 36"	F21T5/F39T5HO
V	W	1, 2, 3	28, 54		E5, H5	1, U			8" x 48"	F28T5/F54T5HO
V	W	1, 2, 3	21, 39	T	E5, H5	1, U			8" x 72"	F21T5/F39T5HO
V	W	1, 2, 3	28, 54	T	E5, H5	1, U			8" x 96"	F28T5/F54T5HO
BIAX ORDERING GUIDE										
V	W	1	40		EB	1, 7, U			8" x 24"	F40TT
V	W	2	40		EB	1, 7, U			8" x 48"	F40TT

Note: Tandem units contain double the amount of lamps shown

dimensional data

NOTE: SPECIFICATIONS AND DIMENSIONAL DATA ARE SUBJECT
TO CHANGE WITHOUT NOTICE.

plans and lengths

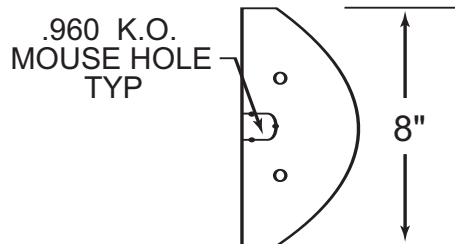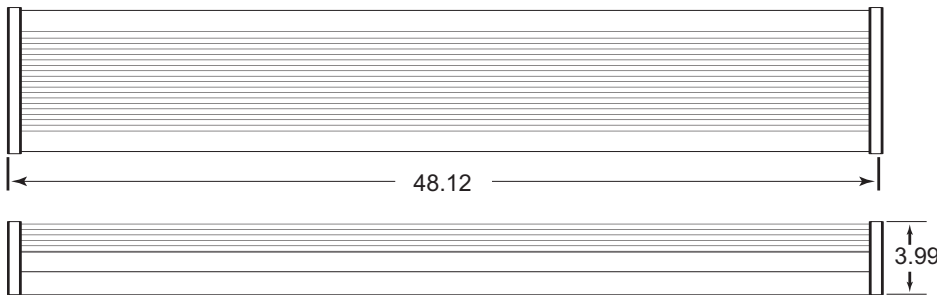

options

OPTIONS: INSERT APPROPRIATE CODE FOR
CUSTOMIZED ORDERING

BALLAST

E8 Electronic T8
EB Electronic Biax
E5 Electronic T5
H5 Electronic T5/HO
ED Electronic Dimming
(Consult Factory)

NOTE: In order to achieve rated lamp life,
fixtures controlled by motion sensors should
be ordered with programmed start ballasts
when available and minimum time delay
should be set to 15 minutes - Consult Factory

VOLTAGE

1 120V
7 277V
U Universal 120 - 277V

COLOR

W White

GENERAL OPTIONS

EM Emergency pack, 1 lamp
90 min. up to 500 lu.
2C 2 Circuit
GSK End gasket
TP Tamper-proof screws

Multiple cord options are available.
Consult Factory

accessories

R95 Aluminum reflector 95% refl.
Canopy Standard white 5" dia.,
1 1/2" deep with hardware
Stem Stem + Length needed
AC Aircraft cable & hardware -
consult factory

LAMP OPTIONS

12 T8 741K
15 T8 735K
10 T8 730K
13 T5/T8 841K
16 T5/T8 835K
11 T5/T8 830K

Revised
5/09

LAMAR LIGHTING 485 Smith Street, Farmingdale, NY 11735 • Tel (631) 777-7700
Fax (631) 777-7705 • Outside NY (800) 724-7743 • www.lamarlighting.com

**Lamar
Lighting**
Company, Inc.