


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

8021 ROUND ADJUSTABLE FLAT ACCENT - The VF100 Series of recessed downlight and housing configurations represent the pinnacle of innovation and design of small aperture products for the architectural industry. These fixtures meet and exceed the needs of today's lighting designers and specifiers for small recessed fixtures that perform.

Measurements in () are metric equivalents.

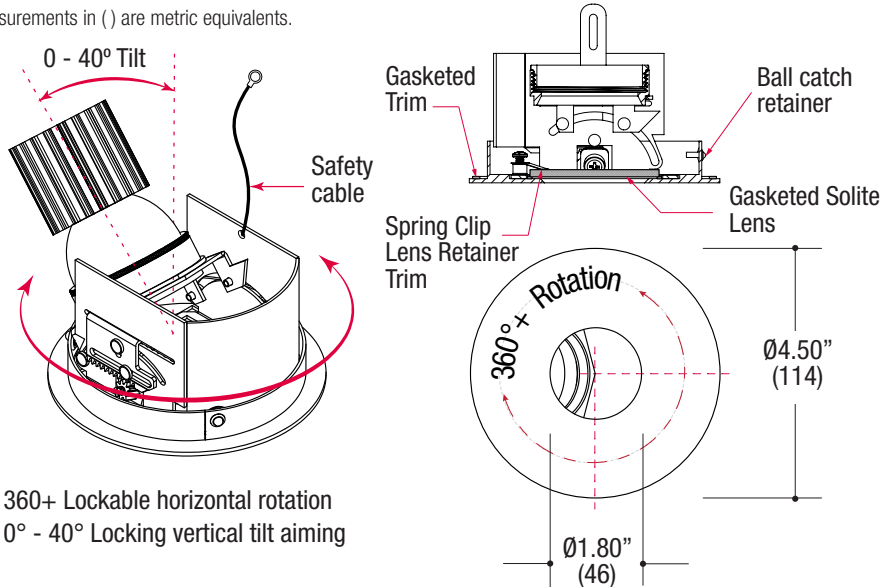

- 360+ Lockable horizontal rotation
- 0° - 40° Locking vertical tilt aiming



Specifications

ROUND DOWNLIGHT

- Recessed adjustable downlight
- 4.50" round flat die-cast aluminum trim
- Small 1.80" round aperture
- Ball catch retainer for easy trim insertion and removal
- Safety cable included
- Powder coat finish

TRIM ORDERING INFO


TRIM SERIES	BRIDGELUX WATTAGE	CRI / COLOR	CREE WATTAGE	CRI / COLOR	BEAM	TRIM FINISH	OPTIONS
8021 New Construction Housing	11L	8027	09C	8027	N Narrow 16° M Medium 28° W Wide 42°	MB Black MW White XX Custom	SHCL Shower rated Clear lay-in lens SHDL Shower rated Diffusion lay-in lens
	16L	8030	14C	8030			
8021RM Remodel Housing	23L	8035	20C	8035			
		8040		8040			
4.50" ROUND Small Aperture Die-Cast Flat Trim Adjustable Downlight		9027		9527			
		9030		9530			
		9727		9535			
		9730		9540			
or							

Example: **8021-14C-8030-N-MB-SHDL**

LED Performance Options


BRIDGELUX

WATTAGE / LUMENS	CRI / COLOR
11L 11W LED / 825lm nom.	8027 80CRI / 2700K
16L 16W LED / 1100lm nom.	8030 80CRI / 3000K
23L 23W LED / 1450lm nom.	8035 80CRI / 3500K
	8040 80CRI / 4000K
	9027 90CRI / 2700K
	9030 90CRI / 3000K
	9727 97CRI / 2700K
	9730 97CRI / 3000K





CREE

CREE	CRI / COLOR
09C 09W LED / 900lm nom.	8027 80CRI / 2700K
14C 14W LED / 1200lm nom.	8030 80CRI / 3000K
20C 20W LED / 1600lm nom.	8035 80CRI / 3500K
	8040 80CRI / 4000K
	9527 95CRI / 2700K
	9530 95CRI / 3000K
	9535 95CRI / 3500K
	9540 95CRI / 4000K




5 YEAR WARRANTY
Limited

Measurements in () are metric equivalents.

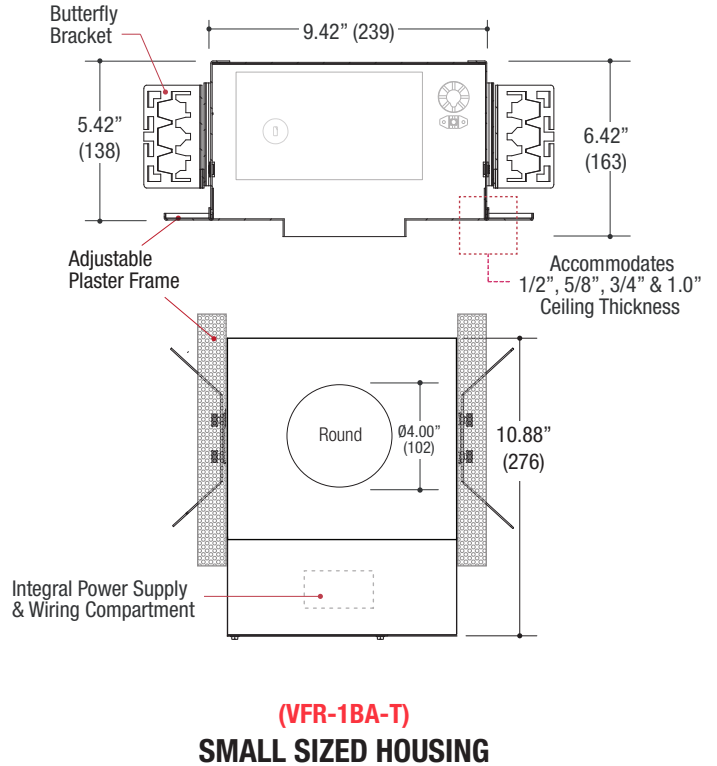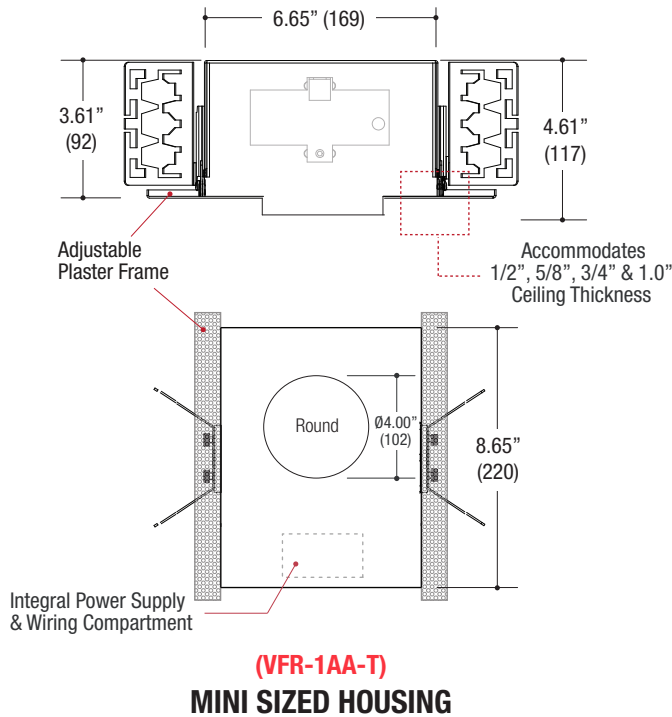

Specifications

ROUND TRIMMED HOUSING

- Housing of all steel construction
- Adjustable plaster frame
- Black powder coat finish
- **Ceiling Cut-out - Ø4.13"**

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Includes hanger bar attachments for residential installation

LABELS

- Suitable for damp location, except when ordered with shower trim - Suitable for wet location
- **IC rated / Air-Tight / Title 24 Compliant**

HOUSING ORDERING INFO



SERIES	BRIDGELUX	CREE	DRIVER	VOLTAGE	OPTIONS
VFR-1AA-T Mini Round Trimmed New Construction Housing	11L 11W LED	09C 09W LED	LD LED Driver	1 120V U 120-277V	IC Insulated Ceiling EM Remotely Mounted Emergency LED Inverter
	16L 16W LED	14C 14W LED	D1 Phase Dimming (120V only)		
	23L 23W LED*	20C 20W LED*	D2 0-10V Dimming		
VFR-1BA-T Small Round Trimmed New Construction Housing	* VFR-1BA-T small housing only	* VFR-1BA-T small housing only	D3 Lutron Hi-lume™* Forward Phase 2 wire 1% (120V only)		
			D4 Lutron Hi-lume™* EcoSystem™ & 3 wire (1%)		
			DE Lutron Hi-lume™ EcoSystem™* 1% w/Soft-On, Fade-to-Black™		
			* VFR-1BA-T small housing only		
or					

Ordering Example: **VFR-1BA-T-14C-D1-1-IC**