
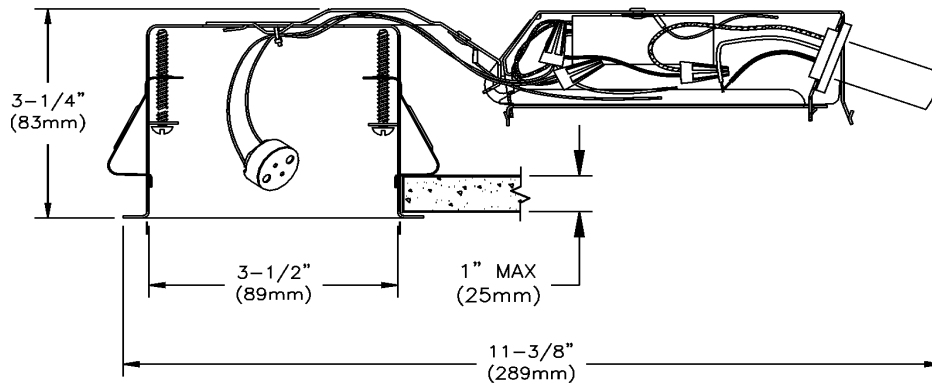


**3 3/4" (95mm) aperture**  
**Low Voltage MR16 12V**  
**Ultra Shallow Electronic Remodeler (Non-IC)**

**Lytecaster**  
**Recessed Downlight**

**303MRE**

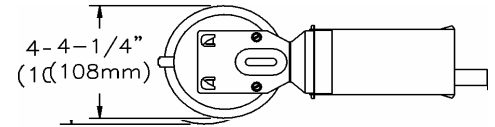

**Complete fixture consists of Reflector Trim & Power Pack. Select each separately**

POWER PACK	CUT-OUT	REFLECTOR TRIM
<b>303MRE</b>	3 3/4" (95mm)	Accepts these following 3 3/4" Low Voltage MR16 trims : 313, 315, 316, 317, 373 and 378 only : see Reflector Trim specification sheets.

#### Features

**Power Pack** : Ideal for remodeling. Swivel junction box for tight plenum spaces. Snap-off covers permits wiring from below.

**Housing** : 25ga galvanized steel.

**Residence Mounting Clip** : Factory-installed ; zinc plated spring steel ; free-hand installation. (patent # 2,184, 149)

**Socket** : Porcelain body ; Two-pin (GX5.3 base) Pre-wired with 18 ga. Teflon 250° leads to junction box.

**Transformer**: Electronic, 60VA, Class 2 transformer, 120 volt primary, nominal 12 volt secondary .

**Transformer**: Electronic, 60W Class 2, 120 volt primary, 11.75 volts output at max. load. RFI protection compatible with FCC limits. Electronic internal resettable protection. Patented auto heat regulation that also automatically acts as overload protection. Auto-reset thermal cut-off at 125C.

**Thermal Protector** : Meets CSA/UL requirements. Insulation, if used, must be kept 3" (76mm) away from luminaire sides and junction box. Do not install insulation above.

#### Accessories

**Thermal Protector Replacement : 1970**

#### Labels : CSA , UL

Damp or Wet location rated depending on trim used.

Available at GoodMart.com  
 877-402-6100  
 Lighting, Electrical & Industrial Supply

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH, IN ANY WAY THAT WILL NOT ALTER INSTALLED APPEARANCE OR REDUCE FUNCTION AND PERFORMANCE.

**Lightolier CFI, 3015 Louis Amos Lachine, (Quebec) H8T 1C4**

**LIGHTOLIER®**