

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal for New York applications where aluminum housing and 8" letter height are required.

CONSTRUCTION

Aluminum housing.

Dual-voltage input capacity (120/277).

Uniform graphical illumination without shadows or hot spots.

Letters 8" high with 1" stroke. New York City Approved.

LAMPS

LED technology provides perfectly uniform illumination to meet 1" letter stroke required by code.

LED life rated up to 10 years. Unique LED lamp platform accommodates both single-face and double-face exits.

Low energy consumption.

BATTERY (for ELN option only)

Sealed, maintenance-free nickel-cadmium battery delivers 90 minutes capacity to lamp. Charger maximizes battery life and automatically recharges after battery discharge.

INSTALLATION

Universal mounting (top, end or back). Canopy provided.

Universal chevron knock-outs.

LISTINGS

UL listed. Meets UL 924, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards.

WARRANTY

Three-year warranty.

Die-Cast Aluminum Exits

LENY



LED LAMPS

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: LENY 3 R

LENY						3		R			
Family	Face type	Housing color		Number of faces		Letter color		Operation			
LENY LED	(blank) Stencil	(blank) Black housing with brushed face		3 Single face with extra face plate and color panel		R Red		(blank) EL	Standard non-emergency Emergency operation with nickel-cadmium battery		

LENY Die Cast Aluminum Exits

SPECIFICATIONS

ELECTRICAL

Primary Control

Type	Rated LED life	Supply voltage	Input watts	Max. amps
Red - Standard	10 years	120	2.3	.025
Red - Standard	10 years	277	2.7	.012
Red - Emergency	10 years	120	2.3	.025
Red - Emergency	10 years	277	2.7	.012

BATTERY

Sealed Nickel-Cadmium (EL N Option)

Shelf life ¹	Expected life ¹	Maintenance	Optimum temperature ²
3 years	6-8 years	none ³	32° - 100°F (16° - 32°C)

NOTES:


- 1 At 77°F (25°C).
- 2 Optimum ambient temperature range where until will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity. Consult factory for detailed information.
- 3 Periodic system status test recommended.

DIMENSIONS


All dimensions are in inches.

Shipping weight: Standard - 8.4 lbs (3.8 kgs)


Emergency - 8.4 lbs (3.8 kgs)

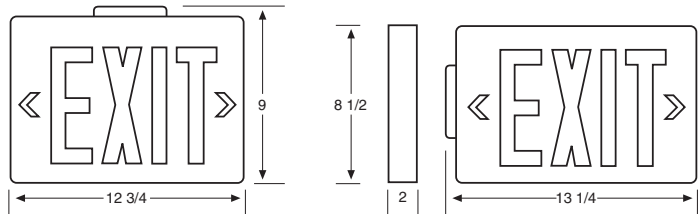

KEY FEATURES



Unique LEDs provide extremely long life and low energy consumption.



Unique LEDs provide extremely long life and low energy consumption.