

LED INTERIOR RETAIL CEILING LIGHT (CIRU)



US patents 8382334, 8215799, 7952293 and US & Int'l. patents pending.

SMARTTEC™ ENERGY SAVING FEATURES

THERMAL CONTROL - LSI drivers feature integral sensor which reduces drive current, when ambient temperatures exceeds rated temperature.

HOUSING - Low profile, durable die-cast, aluminum construction, providing a reliable weather-tight seal.

LEDS - Features a choice of two arrays of select, mid-power, high brightness, high efficiency LED chips; CW - 5300°K color temperature, 70 CRI (nominal) or NW - 4100°K color temperature, 80 CRI (nominal).

DRIVE CURRENT - Choice of Low Wattage (LW), Mid Wattage (MW), Super Saver (SS), High Output (HO), or Very High Output (VHO).

OPTICS / DISTRIBUTION - Available with (SC) standard ceiling distribution, which directs light through a clear tempered glass lens, to provide a uniform distribution of light to vertical and horizontal surfaces.

OPTICAL UNIT - Features an ultra-slim 3/4" profile die cast housing, with a clear tempered glass lens. Unit is water-resistant, sealed to an IP67 rating. Integral designed heat sink does not trap dirt and grime, ensuring cool running performance over the life of the fixture.

PRESSURE STABILIZING VENT - Luminaire assembly incorporates a pressure stabilizing vent breather to prevent seal fatigue and failure.

DRIVER - State-of-the-art driver technology superior energy-efficiency and optimum light output. LSI driver components are fully encased in potting for IP65 moisture resistance. Complies with IEC and FCC standards.

DRIVER HOUSING - Fabricated aluminum, driver/electrical enclosure is mounted to back of optical assembly to provide easy "knock-out" connection of primary wiring.

OPERATING TEMPERATURE - -40°C to 40°C (-40°F to +104°F)

ELECTRICAL - Voltage specific power supply, 120-277 VAC, 50/60 HZ input. LSI drivers meets IEEE C62.41.2-2002, Scenario 1, Location Category C.

FINISH - Standard color is white and is finished with LSI's DuraGrip polyester powder coat process. DuraGrip withstands extreme weather changes without cracking or peeling.

INSTALLATION - Pre-assembled standard unit installs in interior T-bar grid ceiling applications via a choice of 2x2 mounting pan or flange kit. Mounting pan includes earthquake clips to secure fixture in grid ceiling. Accessory flange kit available for installing in drywall or plaster. Low profile design requires only 12" minimum clearance.

SHIPPING WEIGHT - 20 pounds.

EXPECTED LIFE - Minimum 60,000 to 100,000 hours depending upon the ambient temperature of the installation location. See LSI web site for specific guidance.

WARRANTY - Limited 5-year warranty.

LISTING - UL listed to UL 1598, UL 8750 and other U.S. and International safety standards. Suitable for damp locations.

PHOTOMETRICS - Applications layouts are available upon request.

LIGHT OUTPUT - CIRU

		Lumens		Watts		LPW	
		Clear	Diffused	Clear	Diffused	Clear	Diffused
Cool White	VHO - Very High Output	23,523	20,619	196	196	120	105
	HO - High Output	19,630	17,078	150	153	131	112
	SS - Super Saver	14,879	12,953	129	129	115	100
	MW - Mid Watt	12,818	11,029	103	103	124	107
	LW - Low Watt	8,852	7,718	77	77	115	101
Neutral White	VHO - Very High Output	20,190	17,458	197	197	102	89
	HO - High Output	16,705	14,872	151	151	111	98
	SS - Super Saver	12,845	11,149	129	129	100	86
	MW - Mid Watt	10,861	9,388	105	105	103	89
	LW - Low Watt	8,114	7,154	75	75	108	95

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



IP65



LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **CIRU SC LED HO NW 120 2x2 WHT DFL**

Prefix	Distribution	Light Source	Drive Current	Color Temperature	Line Voltage	Mounting	Finish	Options
CIRU- Crossover Interior Retail Ceiling	SC - Standard	LED	LW - Low Watt MW - Mid Watt SS - Super Saver HO - High Output VHO - Very High Output	CW - Cool White NW - Neutral White	120 - 120V 208 - 208V 240 - 240V 277 - 277V 347 - 347V	2x2 - 2x2 T-bar Grid Ceiling	WHT - White	DIM - 0-10v Dimming DFL - Diffused Lens



ACCESSORY ORDERING INFORMATION (Accessories are field installed)

Description	Order Number
2x2 Flange Kit	FK22 ¹


FOOTNOTES:

1 - FK22 is used for mounting to Sheetrock or Drywall ceilings. It requires attaching via framing members or suspending from structure.

DIMENSIONS

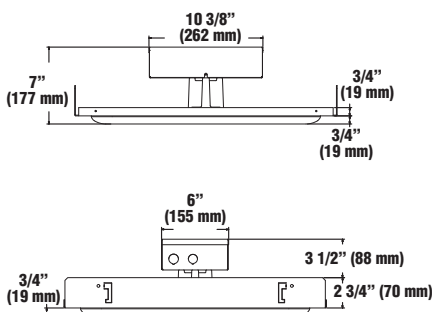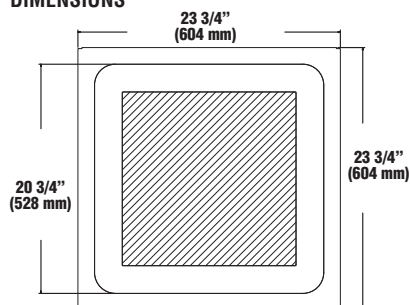

Requires minimum 12" clearance above ceiling for installation.

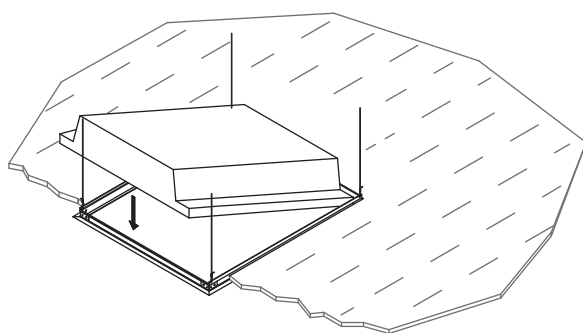

Flange Kit