

Skylark Contour™ 1000 W Incandescent/Halogen or 600 VA Magnetic Low-Voltage (MLV) Dimmer

Captive knob slide control with an easy to use rocker switch.

Product Family Features

- On/off rocker switch with a captive slider for a standard designer wallplate opening
- Switch returns load to previous level
- Uses standard single-pole or 3-way wiring for easy installation in any home
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates available separately
- Available in all Claro® gloss colors
- Skylark Contour Family:
 - 💡 Incandescent/Halogen
 - 🔌 Electronic Low-Voltage (ELV)
 - 🔌 Magnetic Low-Voltage (MLV)
 - 🔌 Quiet Fan Speed
 - 💡 Compact Fluorescent (CFL)/LED


Standard Colors and Finishes

Gloss Finishes

Add color suffix to model #

Example: CT-103P-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

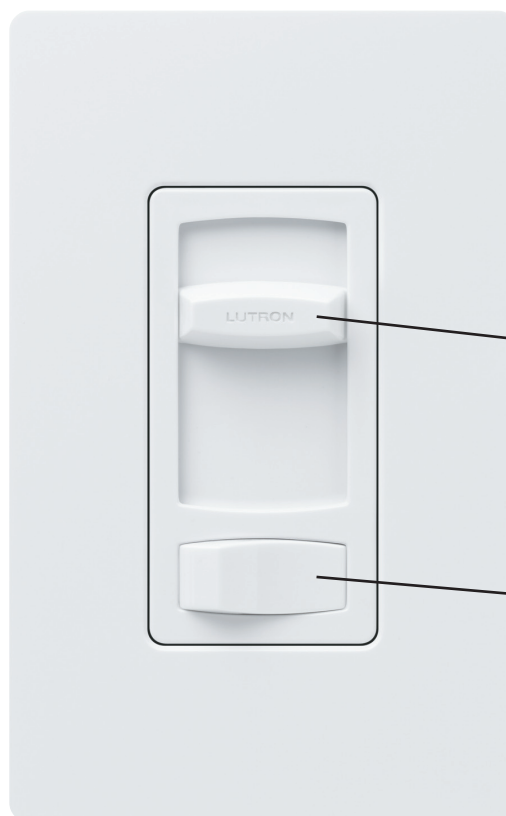

Wallplate sold separately

Product Specific Features

- Capable of controlling up to 1000 W Incandescent/Halogen or 600 VA Magnetic Low-Voltage (MLV) lighting loads.

Model Number

CT-103P-XX¹ Single pole/3-way² 1000 W/600 VA

Notes:

¹ XX Gloss color codes, see section “Standard Colors and Finishes” at left.

² For 3-way and 4-way switching, use Claro® switches or other mechanical switches.

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- UL Listed to US and Canadian safety standards
UL1472 / CSA C22.2 184.1

Power and Ratings

- 120 V~ 60 Hz
- 1000 W Incandescent/Halogen
or
- 600 VA Magnetic Low-Voltage (MLV)

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)

Performance


- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Dimmer Capacity Chart

Load Type	No sides removed	1 side removed	2 sides removed
Incandescent/Halogen	1000 W max	800 W max	650 W max
MLV	600 VA max	500 VA max	400 VA max

Note: For actual transformer efficiency, contact either the fixture or transformer manufacturer. The total VA rating of the transformer(s) shall not exceed the VA rating of the dimmer.

Dimensions

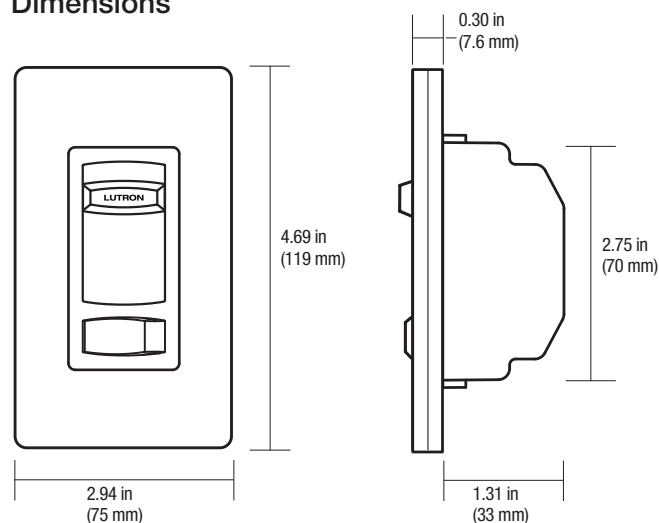

Note: Requires a U.S. wallbox 2 ½ in (64 mm) deep minimum.


Warranty

- 1 Year Limited Warranty
For additional Warranty information, please visit
http://www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf


Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams


Single-Pole Wiring

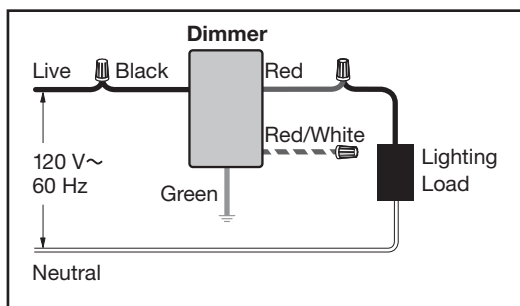

3-Way Wiring

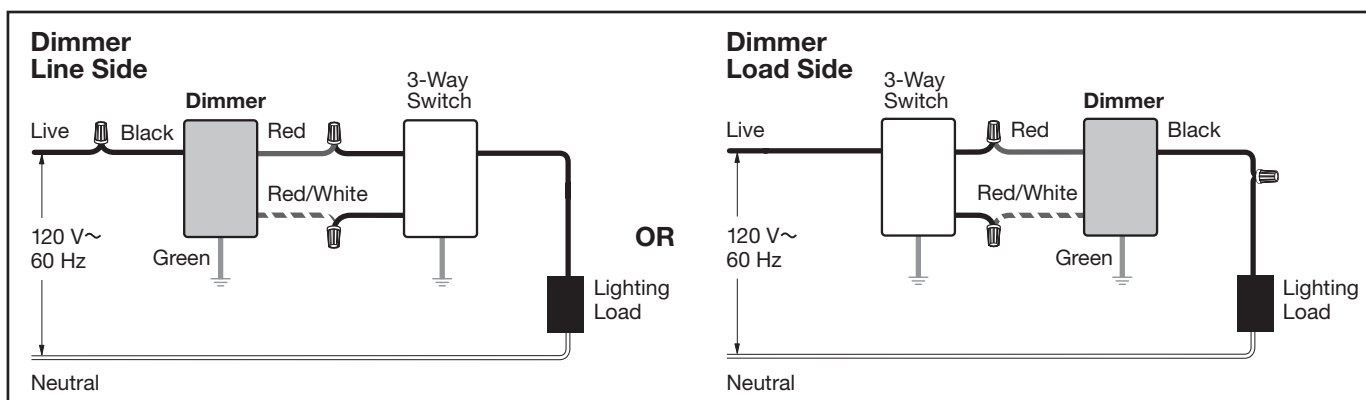

4-Way Wiring

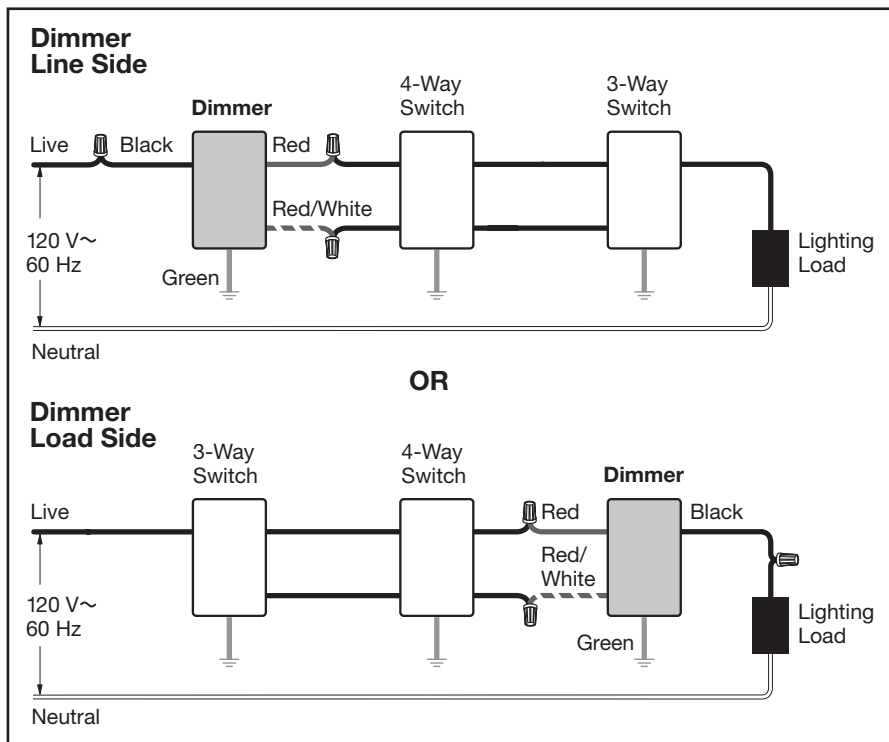

Note: Dimmer can be installed on either the line side or load side of the circuit.

Job Name:

Model Numbers:

Job Number: