


MARK[®]

ARCHITECTURAL LIGHTING

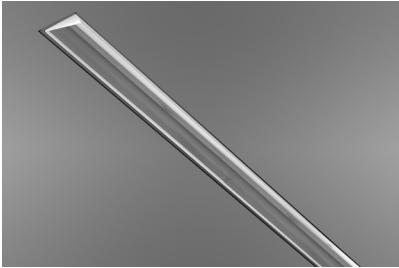

The Slot 4T Series

Slot 4T brings another dimension to the Slot family by providing superior vertical illumination through asymmetric distribution.

Slot 4T features a compact profile—a nominal 3¾ x 4 inches—and follows the family's slender, linear style. Length choices range from 2 to 8 feet, and custom lengths are available. Maximizing efficiency and output, Slot 4T utilizes one T5 or T5HO lamp.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Nominal 4" x 2', 3', 4', 5', 6' or 8' units fabricated from 20-gauge, cold-rolled steel.

Finish

Matte white.

Reflector

Die-formed matte aluminum reflector provides asymmetric distribution.

Lamps

(1) T5 or T5HO lamp. Lamps provided by others.

Ballast

Thermally protected Class P energy-saving electronic ballast.


Mounting

Recessed 9/16" slot grid, 15/16" inverted tee ceilings or sheetrock. Continuous runs available. Consult factory.

Certification

cULus Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

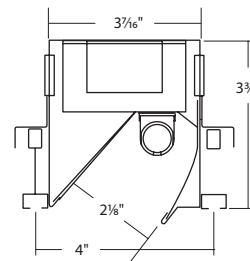

Ordering

Example: SL4T 3 FL 1T5 EBPR 120

Series	Length	Ceiling type	No. of lamps/Lamp type		Ballast	Voltage	Options
SL4T Slot 4T	2 2'	DF 9/16" slot grid	Number of lamps	Lamp type	EBPR Program rapid start (standard)	120	EMPK Emergency battery pack
	3 3'	G15 15/16" inverted tee	1	T5	EBIS Instant start	277	CP Chicago plenum
	4 4'	FL 5/8" flange (sheetrock)		T5HO	EDB Dimming (specify)	347	
	5 5'				EDHL Lutron Hi-Lume® dimming		
	6 6'				EDE10 Lutron Eco-10® dimming		
	8 8'				EDES Lutron Eco System®		
	— ft. Specify continuous run length (in whole feet)						

Notes

1 Consult factory for lamp and ballast compatibility.


Photometric Information

Catalog Number
SL4T 4 1T5HO

Report Number
12336.0

Lamps
(1) T5HO, rated 5000 lumens per lamp

Total Efficiency
65.9%

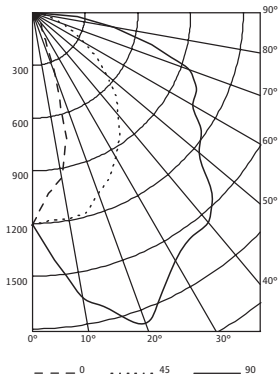

Floor	20%									
Ceiling	80%				50%			30%		
Walls	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%
0	78	78	78	78	73	73	73	70	70	70
1	71	68	65	62	63	61	59	61	59	57
2	65	59	54	50	55	52	48	53	50	47
3	59	52	46	42	49	44	41	47	43	40
4	54	46	40	35	43	39	35	42	38	34
5	50	41	35	31	39	34	30	38	33	30
6	46	37	31	27	35	30	26	34	30	26
7	43	34	28	24	32	27	24	31	27	23
8	40	31	25	21	30	25	21	29	24	21
9	37	28	23	19	27	22	19	27	22	19
10	35	26	21	18	25	21	17	25	20	17

Run Information