

# NM-240 Series

## 3" Mini Solutions Collection

### LAMP WATTAGE

- (1) Q20 G4 Xenon
- (1) Q35MR11
- (1) Q35MR16

### DESCRIPTION

Three-inch downlight rated for use with one G4, one MR11, or one MR16 in under cabinet applications.

### FEATURES

- Diecast Aluminum Body
- Tempered Glass Shield
- High Quality Specular Finish
- Recessed or Surface Applications

### MOUNTING

Mounting screws provided for G4 surface fixtures; housing and ceiling springs provided for recessed MR11 & MR16 fixtures.

### ELECTRICAL SYSTEM

MR lamp socket with fiberglass insulated wiring is provided with strain relief installed into the housing rear. 18" (46cm) wire terminates at pre-installed quick-connect device for easy installation into NMK type multi-tap connector, or when removed can be easily connected to transformer secondary voltage leads.

### UL COMPLIANT

ETL listed to UL Standard 1571 requirements. For use in indoor, dry location applications.

### TRANSFORMERS


Electronic, solid state low voltage transformers. Approved for remote applications. Contains short circuit and overload protection. Note: may be dimmed with standard incandescent dimming controls. UL/ETL recognized component. For use only with UL or ETL listed Nora Lighting products. 300 watt transformer is fully UL listed and has six 50 watt class 2 fused circuits. Use of a 300 watt transformer is recommended for all commercial applications and any others requiring UL listing specifically on the transformer, or class 2 protection on the installation.

### MULTI-TAP CONNECTORS

Modular wiring connector connects 3, 4, or 6 fixtures to one (1) remote transformer. Accepts quick connects from fixture(s) and includes 18" (46cm) lead for connecting to remote transformer.



NM-241

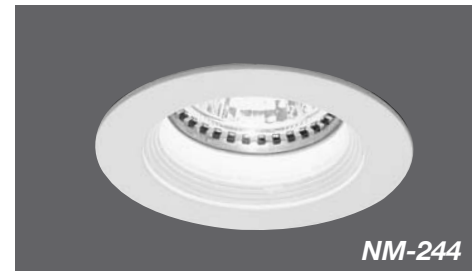

NM-244

### PRODUCT MATRIX


Ordering Example: **NM-249C** - 35 Watt MR16, Recessed Gimbal Ring, Chrome Finish  
**NMK3241B** - 20 Watt G4, Surface, Smooth Face, 3-Lamp Kit W/ Transformer, Black Finish

Item No	Lamp	Description	Finish
<b>NM-240</b>	20G4	Surface Xenon / Halogen, Grooved Face	W, B, C, G
<b>NMK-3240</b>	20G4	Surface Xenon / Halogen, Grooved Face 3-Lamp Kit w/ Transformer	W, B, C, G
<b>NM-241</b>	20G4	Surface Xenon / Halogen, Smooth Face	W, B, C, G
<b>NMK-3241</b>	20G4	Surface Xenon / Halogen, Smooth Face 3-Lamp Kit w/ Transformer	W, B, C, G
<b>NM-242</b>	35MR11	Recessed Halogen, Reflector	W, B, C, G
<b>NM-243</b>	35MR11	Recessed Halogen, Black Baffle	W, B, C, G
<b>NM-244</b>	35MR11	Recessed Halogen, White Baffle	W, B, C, G
<b>NM-245</b>	35MR11	Recessed Halogen, Gimbal Ring	W, B, C, G
<b>NM-246</b>	35MR11	Recessed Halogen, Eyeball	W, B, C, G
<b>NM-247</b>	35MR16	Recessed Halogen, Black Baffle	W, B, C, G
<b>NM-248</b>	35MR16	Recessed Halogen, White Baffle	W, B, C, G
<b>NM-249</b>	35MR16	Recessed Halogen, Gimbal Ring	W, B, C, G

Specify Finish: (W) White; (B) Black; (C) Chrome; (G) Gold

### DIMENSIONS


	LAMP	A	B	CUTOUT
<b>NM-240</b> <b>NM-241</b>	G4	2-5/8" (67mm)	1-1/8" (29mm)	2-3/8" (61mm)
<b>NM-242</b>	MR11	2-1/4" (57mm)	3-1/2" (89mm)	2" (51mm)
<b>NM-243</b> <b>NM-244</b> <b>NM-245</b>	MR11	2-5/8" (67mm)	3-1/2" (89mm)	2-5/16" (59mm)
<b>NM-246</b>	MR11	3-3/16" (81mm)	3-1/2" (89mm)	2-7/8" (73mm)
<b>NM-247</b> <b>NM-248</b> <b>NM-249</b>	MR16	3-1/2" (89mm)	3-1/4" (83mm)	3-1/8" (80mm)

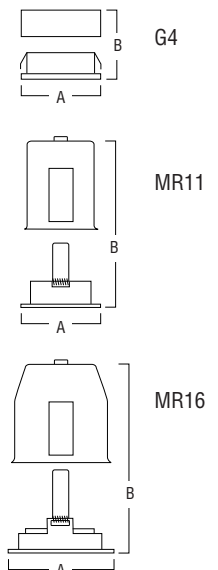

## NM-240 Series *continued*

### 3" Mini Solutions Collection

#### TRANSFORMERS



	60Watt NET-1060 NET-2060	75Watt NET-1075 NET-2075	105Watt NET-1105 NET-2105	150Watt NET-1150 NET-2150	6x50Watt N/A NET-300/C2	6x50Watt N/A NMT-300/C2
A	3-1/8" (80 mm)	3-1/8" (80 mm)	5-1/8" (131 mm)	5-1/8" (131 mm)	7-5/8" (193 mm)	6-3/8" (162 mm)
B	1-7/8" (48 mm)	1-7/8" (48 mm)	1-3/4" (45 mm)	1-3/4" (45 mm)	3-1/2" (89 mm)	7" (178 mm)
C	3/4" (20 mm)	3/4" (20 mm)	1-3/8" (35 mm)	1-3/8" (35 mm)	1-5/8" (42 mm)	3-3/8" (86 mm)

#### MULTI-TAP CONNECTORS



**3-Gang**  
NMK-143



**4-Gang**  
NMK-144



**6-Gang**  
NMK-146

#### COLOR FILTERS



NM-100B	Blue
NM-100Y	Yellow
NM-100G	Green
NM-100R	Red
NM-100F	Frosted
NM-100L	Linear Spread
NM-100S	Standard Spread

Specify catalog number plus:

/128 for G4 fixtures

/MR11 for MR11 fixtures

/MR16 for MR16 fixtures

Example: NM100L/MR11