

NMRS32-123



Cone Mini Rail Fixture

DESCRIPTION

Low voltage MR11 fixture with a cone shaped lampholder attached to rail connector.

SPECIFICATION

LAMP

(1) 35W (max) 12V/24V MR11 Bi-Pin GZ4 base (included with fixture)

HOUSING

Stainless steel construction composed of two parts: Lamp support(stem) and lampholder(socket).

STEM

Stainless steel threaded U-shaped arm connector 1.75"(44.4mm) overall length supplied with a nut to connect to rail. The other end of the arm is secured to a swivel in the lampholder that allows the lamp to rotate 320° on the horizontal plane and swivels 180° in the vertical plane.

WIRING

SOCKET

Hardened polycarbonate secured to the cone by physical fit with a metal bracket for bulb securement. Internal lead wires rated at 200°C, 300V.

FINISHES

Available in Bronze(BZ), Chrome (C), Matte Gold (MG), or Matte Nickel (MN)



LABELS

 listed for dry location only.

CATALOG NO.:	TYPE:
PROJECT:	
COMMENTS:	
PREPARED BY:	DATE:

DIMENSIONS

A: Length	2-7/8" (72mm)
B: Diameter	1-3/16" (30mm)
C: Max. Extension	3" (76mm)

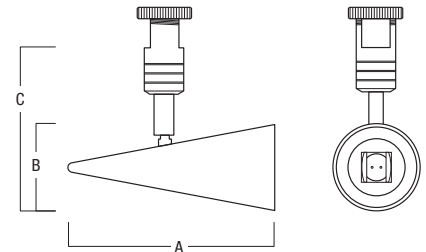

TESTING: ALL REPORTS ARE BASED ON PUBLISHED INDUSTRY PROCEDURES: FIELD PERFORMANCE MAY DIFFER FROM LABORATORY PERFORMANCE. PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.