


## horizon

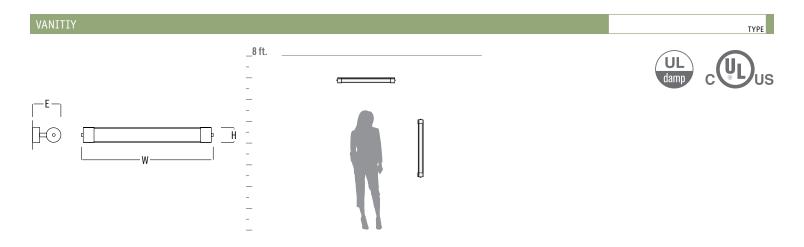

## 2-585-XXX

DIFFUSER	2 Frosted White Acrylic
FINISH	14 24 Polished Chrome Satin Nickel
LAMPING	1 x 25W T8 fluorescent (medium bi-pin)
DIMENSIONS	38.5"(w) x 3"(h) x 5.75"(ext)
OPTIONS	

Review the diagram below to format your original Oxygen product number.

2-585-X XX

DIFFUSER FINISH

2-585-224

## GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Cast steel trim.
- Acrylic diffusers are extruded, 1/8" thick frosted acrylic.
- U.L. and C.U.L. approved for damp locations.
- For installation in Canada, please specify.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 2" X 3" junction box with additional mounting points direct to structure.
- Approved for vertical or horizontal mounting.
- Allow 6" to either end of fixture to facilitate mounting of back plate.
- Toolless access to lamp.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen lighting reserves the right to modify designs at any time.