

FLEXLED
CV15G
 LARGE LED CANOPY



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+

HOUSING:

Die Cast Aluminum with Bronze Powder Coat and Prismatic Polycarbonate Diffuser with UV inhibitors.

MOUNTING:

Direct over 4" outlet box or surface wired through 1/2" conduit entries.

DRIVER:

Constant Current Class 2 100-277 VAC 50/60Hz
 Power Factor: >0.98

CERTIFICATIONS:

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

ENVIRONMENT:

Outdoor/Wet Location
 IP65 Rated

ARRA COMPLIANT:

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act.

ORDERING GUIDE


STANDARD CONFIGURATION: CV15GL.56W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
CV15G	28W	30K 3000K - Warm White	DIM Accessory - 0-10V Dimmable Driver
	42W	40K 4000K - Neutral White	R300755 Accessory - 120V Photocell
	56W	50K 5000K - Cool White	R300756 Accessory - 208V/277V Photocell
	70W	55K 5500K - Daylight	
	84W		

SPECIFICATIONS

SYSTEM WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
28W	2,604lm	93 lm/W	>85	175W
42W	3,906lm	93 lm/W	>85	250W
56W	5,208lm	93 lm/W	>85	400W
70W	6,510lm	93 lm/W	>85	400W
84W	7,812lm	93 lm/W	>85	400W

DIMENSIONS

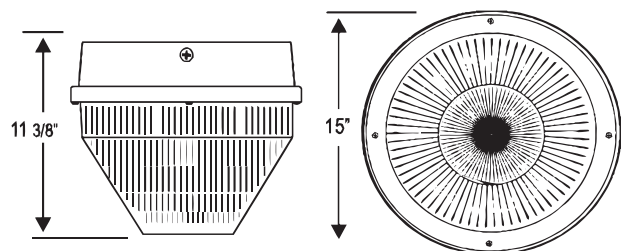

Specifications subject to change without notice.