

FLEXLED
CV303
 MEDIUM LED CANOPY



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+

HOUSING:

Die Cast Aluminum with Bronze Powder Coat and Prismatic Polycarbonate Diffuser with UV inhibitors.

MOUNTING:

Direct over 4" outlet box or surface wired through 1/2" conduit entries.

DRIVER:

Constant Current Class 2 100-277 VAC 50/60Hz
 Power Factor: >0.98

CERTIFICATIONS:

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

ENVIRONMENT:

Outdoor/Wet Location
 IP65 Rated

ARRA COMPLIANT:

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act.

ORDERING GUIDE


STANDARD CONFIGURATION: CV303.28W.40K

| MODEL | WATTS | COLOR TEMPERATURE (CCT) | ACCESSORIES |
|--------|-------|----------------------------|---|
| CV303* | 14W | 30K 3000K - Warm White | DIM Accessory - 0-10V Dimmable Driver |
| | 28W* | 40K* 4000K - Neutral White | R300755 Accessory - 120V Photocell |
| | 42W* | 50K 5000K - Cool White | R300756 Accessory - 208V/277V Photocell |
| | 56W | 55K 5500K - Daylight | |

SPECIFICATIONS

| SYSTEM WATTS | DELIVERED LUMENS | EFFICACY | CRI | ~HID |
|--------------|------------------|----------|-----|------|
| 14W | 1,302lm | 93 lm/W | >85 | 100W |
| 28W | 2,604lm | 93 lm/W | >85 | 175W |
| 42W | 3,906lm | 93 lm/W | >85 | 250W |
| 56W | 5,208lm | 93 lm/W | >85 | 400W |

DIMENSIONS

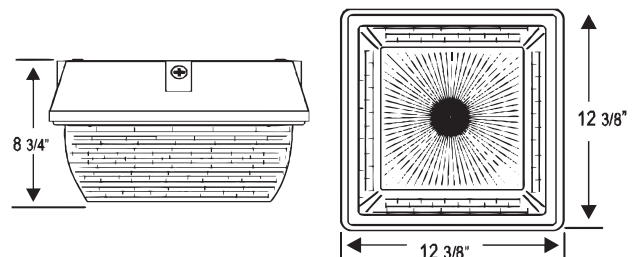

Specifications subject to change without notice. * Indicates DLC Qualified Product